

D75VA

DT08V

DAVEY

SumpPumps

Model Number:
D75VA, DT08V

GUARANTEE
1 YEAR

APPLICATIONS

Ideal for grey water pumping, sump emptying, septic effluent disposal, water transfer and pumping of waste water with soft solids in suspension.

SUBMERSIBLE GREY WATER PUMPS

FEATURES & BENEFITS

Corrosion resistant 304 stainless steel shaft, motor shell and fasteners
- Long service life

Open impeller, vortex, centrifugal design
- Able to pump soft solids in suspension
- Less susceptible to blockage

Double mechanical shaft seal in oil bath with hard faced silicon carbide / ceramic seal on pump side
- Added motor protection
- Long service life

Sand slinger lip seal
- Added protection
- Long service life

Sump Pumps

DAVEY

OPERATING LIMITS	
Capacities to	600 lpm
Heads to	8.5m
Max. submergence	20m
Max. operating temperature	40°C
Max. soft solids	46mm O.D.

SUITABLE FLUIDS

Sewage or "Grey Water" of neutral pH containing up to 20% soft organic solids (some wear should be expected while pumping hard solids in suspension).

MATERIALS OF CONSTRUCTION		
PART		MATERIAL
Impeller		Cast iron
Pump casing		Cast iron
Outlet		Cast iron
Shaft seal	pump side motor side	Silicon carbide/ceramic Carbon/ceramic Mechanical seals in captive oil bath with oil seal
Shaft seal elastomer		Nitrile rubber
Pump shaft		304 Stainless Steel
O-rings		Nitrile rubber
Motor shell		304 Stainless Steel
Handle		304 Stainless Steel
Fasteners Float & power supply leads		304 Stainless Steel HO7RN-F oil resistant

ELECTRICAL DATA		
Model	D75VA	DT08V
Supply voltage	220-240V	380-440V
50Hz - Phase	Single	Three
Speed	2 pole, 2850rpm	
Output power	0.75kW	
Full load current	7.5A	1.9A
Locked rotor current	22.5A	10.5A
Insulation class	Class F	
IP rating	X8	
Starting	CSCR	DOL
Electrical lead	AU plug x 10m length	

HYDRAULIC PERFORMANCE

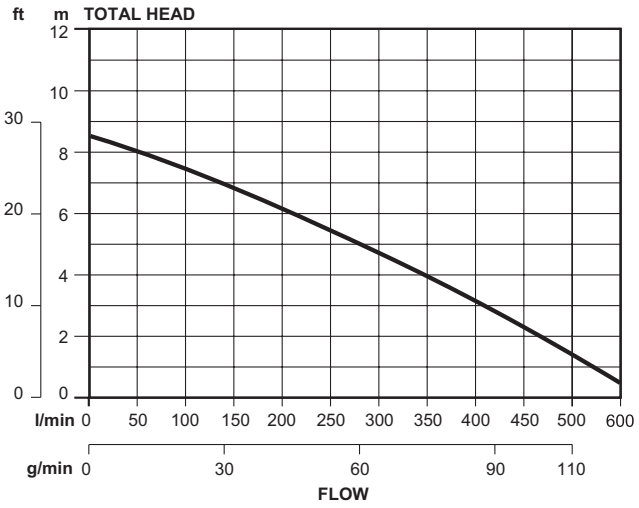

DIMENSIONS (mm)							
Model	A	B	C	D	E	BSP*	Net Weight (kg)
D75VA	495	280	200	170	265	3"F	31
DT08V	435	280	200	170	N/A	3"F	31

*Outlet thread with barb removed

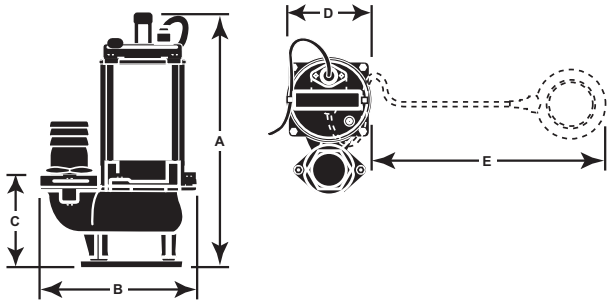

H/O & MFG SCORESBY
Certified System Quality ISO 9001
Certified System Environment ISO 14001

daveywater.com

This literature is not a complete guide to product usage. All images provided in this document are for illustration purposes only. Further information is available from your Davey Dealer, Davey Support Centre and from the relevant product Installation and Operating Instructions. Must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice.
® Davey is a registered trademark of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2024.

DAVEY

DWP0315-6/0624