Hannay Reels®
The reel leader.

Spray and Pressure Washing Hose Reels

Pressure Washing	Soft Wash	Spray Operations	Washdown	Steam Cleaning
Auto Washing	Processing Plants	Grounds Maintenance	Pest Control	Tree Spraying
Vehicle Maintenance	Lawn Care Service	Agriculture

Family owned and operated since 1933

CONTENTS

Hannay hose reels come in all sizes and capacities.

Reel Type	Page
Hannay Reels Sales Policies	2
Manual or Power Soft Wash Hose Reels	
Series CHC4000/CHC	3
Manual Pressure Washing Hose Reels	
Series PW-2 and Optional Mounting Kits	4
Spring Rewind Reels	
Series N700	5
Compact Manual Rewind Reels	
Series 1000/MS-1000	6
Portable Reels on Wheels	
Series 1100/AT1200	7
Manual or Power Rewind Reels	
Series 1500	8
Series 1800	9
Series 2000 (Dual Hose)	10
Series 4000	11
Series 6000	12-13
Remote Controlled Power Rewind Reels	
Series RM	14
Non-Corrosive Manual or Power Rewind Reels	
Series SNC	15

Return Goods Policy

All Hannay reels are built to order. These orders are typically placed into production within 1 business day of receipt. Once production begins, it may not be possible to cancel the order.

To prevent returns because the wrong reels or parts were ordered, please use the Hannay Reels Spec Worksheet (either online or from our Order Accessory Guide) when specifying reels. Be sure to include any size, weight, pressure and/or material compatibility limitations for the application.

In the event that an item does need to be returned for credit, repair or replacement, prior approval must be obtained from Hannay Reels. Upon your request, we will send a Return Goods Authorization (RGA) form. A signed copy of this form must accompany the material when returned to us, with the RGA number clearly showing on the outside of the box—a label is provided to you that you can print and attach. No product will be accepted for return or credit without an authorized RGA number.

All material must be returned prepaid, unless otherwise noted on our RGA. No return will be accepted that has been damaged due to improper return packaging, tampered with or altered from its original condition. Our restocking and handling fee is a minimum of 25% for standard catalog reels and parts. Custom reels specially built to customer specifications cannot be returned for any reason.

Mounting Hole Sizes	
N Series Reels	7/16" wide x 7/8" long slot running front to back
Pressed Frame Reels and Channel Framed Reels	7/16" wide x 7/8" long slot running left to right
Series 1000	7/16" wide x 1-7/16" long slot
Series 1500, 1800, 2000, 4000	13/32" round holes

Hannay Reels 3-Year Limited Warranty

Products manufactured by Hannay Reels, Inc. (“Hannay”) are warrantied for 3 years from date of shipment when properly installed, maintained, and operated in accordance with Hannay instructions. In no event will Hannay have a warranty obligation for normal wear and tear, or for products that have, at Hannay’s determination, been subjected to accident, abuse, misapplication, improper installation or improper maintenance. Common examples of normal wear and tear would include paint finish, swivel joint seal wear, and switch or motor brush wear.

Hannay makes no warranties, express or implied, other than those included in this warranty statement, and we disclaim any implied warrant of merchantability or fitness for any particular purpose. Hannay will not be liable for any consequential, incidental, or indirect damages from any cause whatsoever.

Failure to use a flexible inlet connection on any live hose reel will void the swivel joint warranty. Failure to use a properly sized circuit breaker with any electric rewind motor will void the electric motor warranty. Failure to use a filter and lubricator on any air rewind motor will void the air motor warranty. Failure to follow all procedures outlined in the Safety Guidelines document will void the warranty.
Components not manufactured by Hannay will be subject to the original manufacturers’ warranties. Examples of such components include: hose and cable, motors, speed controls, and switches, swivel joints and seals, slip ring and brush assemblies.

Equipment which proves to be defective upon our inspection will be replaced free of charge, including freight to the customer. Our responsibility ceases upon delivery to any common carrier and we do not, unless previously instructed, insure shipments beyond point of delivery to such carrier. **No material will be accepted for return without a return goods authorization (RGA).** This warranty extends to the replacement or repair of the reel or part (no labor).

Hannay reserves the right to modify or alter materials, dimensions, design, and construction when necessary to improve the performance of the reel and/or accessories, or to meet delivery requirements.

Notice on Reel Finish

Standard finish on Hannay reels is a high performance modified acrylic enamel paint. Standard color is metallic graphite*. Other colors available, please consult factory.

Most of the major components on standard reels are e-coated prior to receiving final topcoat paint finish. This combination of e-coat and enamel topcoat will meet the finish requirements of most customer applications and environments.

In cases where requirements cannot be met with the standard finish, Hannay Reels can coat any model reel with an automotive primer, allowing application of final coating at your facility.

Alternatively, Hannay Reels can provide a quote for matching a customer-provided paint specification. For further information, please contact your Hannay Reels sales engineer and a special paint request form will be sent to you.

For environments where no paint finish is suitable, we offer both aluminum and stainless steel (304 grade) construction on most reel models.

Non-reflective black matte finish is standard for all reels listed on pages 3-9 in this catalog.

Phone: **518-797-3791** | Toll Free: **1-877-467-3357** | FAX: **518-797-3259** | Email: **reels@hannay.com** | **hannay.com**

Series **CHC4000/CHC**

• Soft Wash • Chlorine • Bleach

Our specialty designed CHC reels are perfect for soft wash applications, the hose serves as the fluid path, and a PVC swivel that resists corrosion.

To handle single 1/4" through 1 1-/2" I.D. hose

- **CHC4000 Series**: handles 1/4" through 1/2" ID hose, ranging from 50 ft up to 300 ft in length.
- **CHC Series**: handles 3/8" through 1-1/2" ID hose, ranging from 50 ft up to 200 ft in length.
- Standard inlet: CPVC swivel joint, rated to 100 psi, resists corrosion and provides longer life. Stainless steel inlet with higher psi also available, consult factory.
- Standard fluid temperatures from -33° F to +200° F (-36° C to +93° C). Optional temperature ratings available - consult factory.
- Slotted hub for hose passage, with drum cut out on opposite side from the swivel joint. Fluid will not come in contact with metal, as the hose serves as the fluid path.
- Manual or power rewind models available.
- Special swivel mounting bracket with clamp to hold the CPVC swivel in place.
- Reels can be constructed of painted steel or stainless steel.

Close-up of CPVC swivel, clamp and mounting bracket.

CHC4000 Model
Bottom transparent image shows how the hose serves as the fluid path.

CHC Model
For larger diameter hose.

ORDERING INFORMATION:

Contact Hannay Reels Inside Sales Department for more information. Be sure to provide detailed specifications on hose type, ID/OD, fluid and application information when ordering.

Series **PW-2**

• Pressure Washing • Steam Cleaning • Spray Operations • Washdown
• Optional Mounting Kits

To handle single 3/8" or 1/2" I.D. hose.

- Permanent direct crank rewind, with adjustable split bearing brake assembly.
- Standard inlet: full flow swivel joint with 1/2" NPT fitting.
- Standard outlet: 1/2" female NPT fitting, supplied with 1/2" MNPT to 3/8" FNPT reducing bushing. Other sizes and/or threads available, must specify.
- Pressures up to 5000 psi (345 bar). Flow rate of over 12 gpm @ 15 fps.
- Standard fluid temperatures from +32° F to +400 °F (0° C to +204° C). Optional temperature ratings available - consult factory.
- Captive (4-sided) hose guide roller assembly.
- Black powder coated finish.
- Optional stainless steel construction and internals – consult factory.

Optional PWK-200 mounting kit shown

Optional Mounting Kits

Wall, floor, pivoting and non-pivoting options are available. Combination kits also available depending on installation. Must specify mounting position when ordering mounting kits (kits include hardware). Universal mounting pattern (2.75" x 5").

PWK-200 – Rigid (non-pivoting) wall mounting. Floor mounting available, consult factory.

PWK-300 – Mounting to 1" round tubing. Other tubing (round or square) sizes available, consult factory.

PWK-400 – Wall mounting - ability to pivot the reel. Includes pivoting platform, knob, and mounting hardware. (Mounting hole pattern: 2.75" x 2.75").

Optional PWK-400 kit – wall installation shown

Optional PWK-400/300 combo kit – vertical tube installation shown

PARTS DRAWING – ISO 193

Model Number	Hose Capacity of Reel shown in feet/meter			Approx. Weight Crank Rewind shown in lb/kg			Reel Dimensions*** shown in inches/millimeter									
	I.D. in. mm	3/8 10	1/2 13	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.	A	B	C	D	E	F	G	H	X	Y
	O.D. in. mm	3/4 19	7/8 22													
PW-2		125 38	75 23	26 12	58* 26	32 15	9.75 247	6 152	6 152	4.5 114	16.5 419	19.25 488	18 457	9.88 250	5 127	2.75 70

Notes:

1. Specifications subject to change.
2. **Finish:** Refer to page 3.
3. **Be sure to check dimensions and weights prior to ordering.**

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

* When shipped as a parcel package (via FedEx or UPS Ground).

*** X, Y indicate mounting holes.

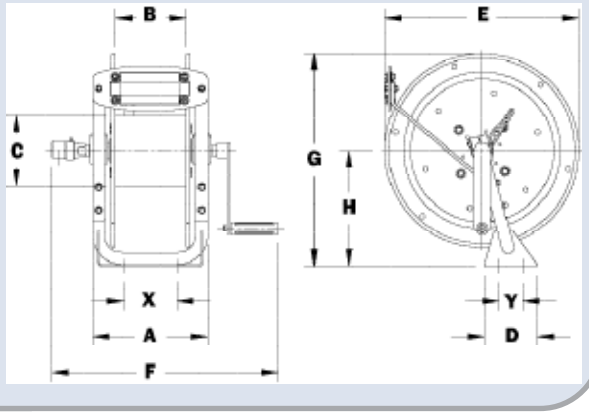

MOUNTING KITS

PWK-200
Wall mount





PWK-300
For round tubing mount

PWK-400
Wall mount with pivot



Phone: **518-797-3791** | Toll Free: **1-877-467-3357** | FAX: **518-797-3259** | Email: **reels@hannay.com** | **hannay.com**

Series **N700**

• Lubrication • Air/Water • Washdown
• Air Tools • General Industrial Applications

To handle 1/4" through 1/2" I.D. hose.

- Narrow frame and compact mounting base.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet: 90° balanced pressure swivel joint, 1/2" female NPT threads.
- Standard outlet: 1/2" female NPT threads.
- Standard pressures to 3000 psi (207 bar), available up to 10,000 psi (690 bar) – must specify.
- Standard fluid temperatures from -40° F to +250 °F (-40° C to +121° C). Optional temperature ratings available - consult factory.
- 4-way roller assembly. SR and VR roller positions: swivel joint is standard on the right. TR roller positions: swivel joint is standard on the left. Other configurations available, must specify.
- Constant tension is available – consult factory.

Standard SR configuration shown

Optional Swivel Mounting Bracket
Part No. 9908.9990. For N-Series spring retractable reels, available as a kit. Conditions apply, consult factory.

PARTS DRAWING – ISO 79

Model Number	Hose Capacity of Reel shown in feet/meter				Approx. Weight shown in lb/kg			Standard Roller Assy.	Reel Dimensions*** shown in inches/millimeter							
	I.D. in. / mm	1/4 / 6	3/8 / 10	1/2 / 13	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.		A	B	C	E	F	G	H	X
	O.D. in. / mm	5/8 / 16	3/4 / 19	7/8 / 22												
N716-14-16-8C		– / –	25 / 8	25 / 8	52 / 24	64* / 29	87 / 39	N204	10 / 254	4 / 102	8 / 203	18.12 / 460	11.63 / 295	16.12 / 409	9.12 / 232	8 / 203
N716-16-17-10.5C		– / –	35 / 11	35 / 11	55 / 25	69* / 31	90 / 41	N204	10 / 254	4 / 102	10.5 / 267	19 / 483	11.63 / 295	17 / 432	9.12 / 232	8 / 203
†N716-17-18-8L		– / –	50† / 15†	50† / 15†	55 / 25	68* / 31	90 / 41	N204	10 / 254	4 / 102	8 / 203	19.5 / 495	11.63 / 295	17.38 / 441	9.12 / 232	8 / 203
N716-19-20-10.5J		– / –	50 / 15	50 / 15	64 / 29	82* / 37	99 / 45	N204	10 / 254	4 / 102	10.5 / 267	20.75 / 527	11.63 / 295	20 / 508	10.62 / 270	8 / 203
N716-23-24-15.5J		– / –	65 / 20	65 / 20	79 / 36	94* / 43	114 / 52	N204	10 / 254	4 / 102	15.5 / 394	24 / 610	11.63 / 295	24 / 610	12.62 / 321	8 / 203
N716-23-24-15.5G		100 / 30	75 / 23	65 / 20	94 / 43	101 / 46	129 / 59	N204	10 / 254	4 / 102	15.5 / 394	24 / 610	11.63 / 295	24 / 610	12.62 / 321	8 / 203
N716-25-26-15.5B		– / –	75 / 23	75 / 23	90 / 41	– / –	125 / 57	N204	10 / 254	4 / 102	15.5 / 394	25.5 / 648	11.63 / 295	26 / 660	13.62 / 346	8 / 203
N718-25-26-15.5G		– / –	100 / 30	100 / 30	96 / 44	– / –	131 / 59	N206	12 / 305	6 / 152	15.5 / 394	25.5 / 648	13.63 / 346	26 / 660	13.62 / 346	10 / 254
††N718-25-26-15.5 SD		– / –	100 / 30	100 / 30	104 / 47	– / –	139 / 63	N206	12 / 305	6 / 152	15.5 / 394	25.5 / 648	14.38 / 365	26 / 660	13.62 / 345	10 / 254

Notes:

A hose stop is necessary to keep spring from unwinding.

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for heavy-duty or vertical lift applications, consult factory.
3. Other sizes, from standard components, available on request.
4. **Finish:** Refer to page 3.
5. **Be sure to check dimensions and weights prior to ordering.**

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

*Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).

***X, Y indicate mounting holes. See page 5.

†Capacity based on low pressure air hose only. Not for vertical lift applications.

††SD spring to be used for heavy-duty or vertical lift applications, consult factory.

Available Roller Positions



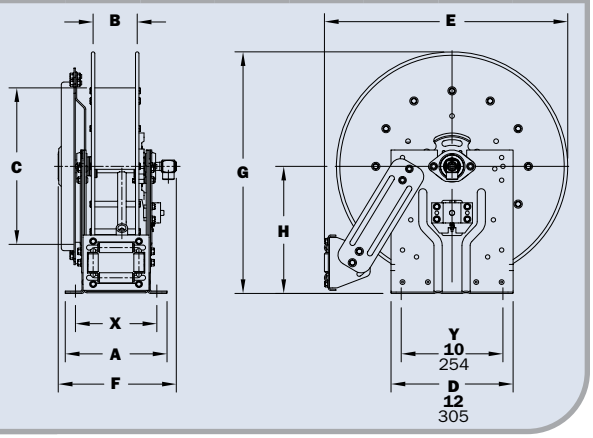

Series **1000**

- **Pressure Washing • Washdown**
- **Spray Operations • Air**

To handle single 1/4", 3/8" or 1/2" I.D. hose.

- Lightweight, compact with an e-coated frame.
- Direct crank rewind permanently attached.
- Adjustable cam-lock brake standard.
- Exterior mounting holes for easier installation.
- Redesigned (and field installable) pin lock.
- Standard inlet: 90° ball bearing swivel joint, 1/2" female NPT threads.
- Standard outlet: 3/8" female NPT threads, 1/2" available upon request.
- Standard pressures to 3000 psi (207 bar), available up to 5,000 psi (345 bar) – must specify.
- Standard fluid temperatures from +32° F to +400 °F (0° C to +204° C). Optional temperature ratings available - consult factory.

MS-1000 Series

- Base mounting holes are inside frame for smaller footprint - see diagram to the right for specific dimensions.
- Shorter knob handle standard on MS-1000 for space saving.

1000 Series
Standard configuration shown in graphite finish with optional pin lock

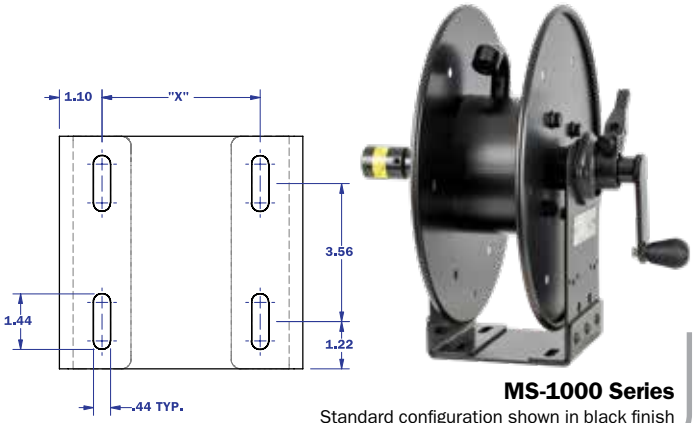

MS-1000 Series
Standard configuration shown in black finish

PARTS DRAWING – 1000/MS-1000–ISO 165

Model Number	Hose Capacity of Reel shown in feet/meter			Approx. Weight Crank Rewind shown in lb/kg			Reel Dimensions*** shown in inches/millimeter			
I.D. in. / mm	1/4 / 6	3/8 / 10	1/2 / 13	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.	A	B	F	X
O.D. in. / mm	5/8 / 16	3/4 / 19	7/8 / 22							
1014-14-16	**100** / 31	**75** / 23	**40** / 12	**23** / 10	**42*** / 19	**58** / 26	**11.5** / 292	**6** / 152	**18.75** / 476	**10** / 254
1016-14-16	**150** / 46	**100** / 31	**70** / 21	**24** / 11	**42*** / 19	**59** / 27	**13.5** / 343	**8** / 203	**20.75** / 527	**12** / 305
1020-14-16	**250** / 76	**175** / 53	**100** / 30	**25** / 11	**42*** / 19	**60** / 27	**17.5** / 445	**12** / 305	**24.75** / 629	**16** / 406
MS-1012-14-16	**–** / –	**50** / 15	**–** / –	**22** / 10	**42*** / 19	**57** / 26	**6.5** / 165	**4** / 101	**14.50** / 368	**4.06** / 103
MS-1014-14-16	**–** / –	**75** / 23	**–** / –	**23** / 11	**42*** / 19	**58** / 27	**8.5** / 216	**6** / 152	**16.50** / 419	**6.06** / 154

Notes:

1. Specifications subject to change.
2. Other sizes, from standard components, available on request.
3. **Finish:** Refer to page 3.
4. **Be sure to check dimensions and weights prior to ordering.**

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

* Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).

*** X, Y indicate mounting holes.

See page 2.



1000 Series shown

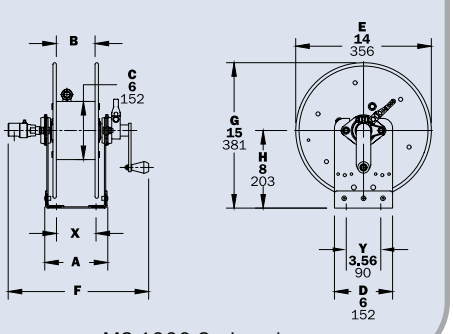

MS-1000 Series shown

Phone: **518-797-3791** | Toll Free: **1-877-467-3357** | FAX: **518-797-3259** | Email: **reels@hannay.com** | **hannay.com**

Series 1100/AT1200

• Grounds Maintenance • Restaurants/Hotels
• Washdown Operations • Home Use

To handle 3/8" through 1" I.D. hose.

- Continuous flow reels with swivel joint inlet, fluid hub, outlet riser.
- Direct crank rewind and cam-lock drag brake.
- One-piece foot and removable steel handlebar.
- **GH** prefix to model number (e.g., GH1100, GHAT1200) includes garden hose thread on outlet, 5' lead-in hose, hose end clips.

Model 1100

- Standard inlet: 90° ball bearing swivel joint, 1/2" female NPT threads.
- Standard outlet: 1/2" female NPT threads.
- Pressures to 3000 psi (207 bar).
- Standard fluid temperatures from +32° F to +400 °F (0° C to +204° C). Optional temperature ratings available - consult factory.
- Rubber tires standard. Oversized pneumatic tires available specify "AT" in model number when ordering.

Model AT1200

- Standard inlet: 90° balance pressure swivel joint, 1" female NPT threads.
- Standard outlet: 1" female NPT threads.
- Standard pressures to 2000 psi (138 bar), available up to 4000 psi (276 bar) – must specify.
- Standard fluid temperatures from -40° F to +250 °F (-40° C to +121° C). Optional temperature ratings available - consult factory.
- Pneumatic tires standard.

GH1100
Standard configuration shown with optional green powder coat finish

GHAT1200
Standard configuration shown

PARTS DRAWING – 1100 ISO 48; AT1200 ISO 87

Model Number	Hose Capacity of Reel shown in feet/meter						Approx. Weight shown in lb/kg		Reel Dimensions shown in inches/millimeter							
	I.D. in. / mm	3/8 / 10	1/2 / 13	5/8 / 16	3/4 / 19	1 / 25	NET	SHIP	A	B	C	D	E	F	G	H
	O.D. in. / mm	3/4 / 19	7/8 / 22	1 / 25	1-9/32 / 33	1-9/16 / 40										
1100		**275** / 84	**175** / 53	**125** / 38	**–** / –	**–** / –	**47** / 21	**100*** / 46	**21.25** / 540	**12** / 305	**6** / 152	**20.12** / 511	**16.5** / 419	**25.25** / 641	**42.5** / 1080	**14.38** / 365
AT1200		**–** / –	**350** / 107	**250** / 76	**150** / 46	**100** / 30	**86** / 39	**147*** / 67	**25.88** / 657	**11.5** / 292	**8** / 203	**22.62** / 575	**22.75** / 578	**27** / 686	**42.5** / 1080	**18.12** / 460

Notes:

1. Specifications subject to change.
2. Some assembly required.
3. **Finish:** Refer to page 3.
4. **Be sure to check dimensions and weights prior to ordering.**

* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

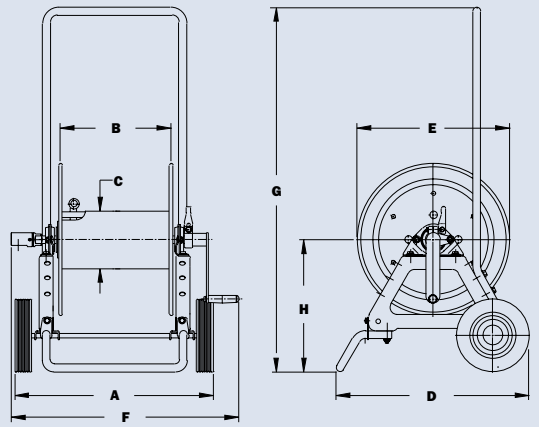

GH1100 shown

Series **1500**

• Lawn Care • Pest Control • Pressure Washing
• Agriculture • Steam Cleaning

To handle single 3/8" through 5/8" I.D. hose.

- Lightweight, compact reels designed for long lengths of hose.
- Manual rewind reels include: cam-lock drag brake, spring actuated pin lock and direct crank rewind.
- Power rewind reels include: chain and sprocket drive powered by electric, hydraulic or air motor.
- Standard inlet: 90° ball bearing swivel joint, 1/2" female NPT threads.
- Standard outlet: 1/2" female NPT threads.
- Standard pressures to 3000 psi (207 bar), available up to 10,000 psi (690 bar) – must specify.
- Standard fluid temperatures from +32° F to +400 °F (0° C to +204° C). Optional temperature ratings available - consult factory.
- Rollers and roller mounting brackets are accessory items. Must specify roller position when ordering.
- Optional stainless steel construction and internals – consult factory.
- **Heavy-Duty Upgrade Options:** 3/16" thick discs, 8" diameter steel 14 gage drum, and optional pressures of 5000 or 10,000 psi, must specify when ordering.
- **Optional HGK-15 Hose Guide Kit:** Includes Hose Guide, handle grip, 2 stainless steel guide rods, 4 mounting blocks, steel mounting bracket set, and all mounting hardware. Must specify when ordering (P/N 9956.2200).

◀ Standard configuration shown with Electric Rewind (E) option and optional HGK-15 hose guide kit

Standard configuration shown ▶ with Crank Rewind

Optional External Mounting Brackets

Part No. 9906.0027.
Add 2-1/2" to the X dimensions shown in the chart.

PARTS DRAWING – ISO 90 (POWER); ISO 179 (MANUAL)

Model Number (For power rewind see Note 5)	Hose Capacity of Reel shown in feet/meter			Approx. Weight Crank Rewind shown in lb/kg (see Note 3)			Reel Dimensions*** shown in inches/millimeter						
I.D. in. / mm	3/8 / 10	1/2 / 13	5/8 / 16	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.	A	B	E CRANK	E POWER	F CRANK	F POWER	X
O.D. in. / mm	3/4 / 19	7/8 / 22	1 / 25										
1514-17-18	**125**	**75**	**50**	**27**	**65***	**62**	**11**	**6**	**17.5**	**19**	**19.25**	**17**	**9.5**
	38	23	15	12	30	28	279	152	445	483	489	432	241
1520-17-18	**275**	**175**	**125**	**29**	**80***	**64**	**17**	**12**	**17.5**	**19**	**25.25**	**23**	**15.5**
	84	53	38	13	36	29	432	305	445	483	641	584	394
1526-17-18	**400**	**300**	**200**	**31**	**98***	**66**	**23**	**18**	**17.5**	**19**	**31.25**	**29**	**21.5**
	122	91	61	14	45	30	584	457	445	483	794	737	546
1530-17-18	**500**	**375**	**275**	**33**	**110***	**68**	**27**	**22**	**17.5**	**19**	**35.25**	**33**	**25.5**
	152	114	84	15	50	31	686	559	445	483	895	838	648
1536-17-18	**–**	**475**	**350**	**35**	**–**	**70**	**33**	**28**	**17.5**	**19**	**41.25**	**39**	**31.5**
	–	145	107	16	–	32	838	711	445	483	1048	991	800

Notes:

1. Specifications subject to change.
2. Upon request, reels can be supplied with drum lengths other than shown.
3. Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models (does not apply to FedEx or UPS):

	Net lbs/kg	Ship lbs/kg
Electric	**18**/8.2	**18**/8.2
Hydraulic	**15**/6.8	**15**/6.8
Air	**15**/6.8	**15**/6.8

4. Dimension "F" is the overall length of standard model reels.
5. When ordering power rewind models, prefix model number with:
   A = Air Rewind – Supplied with control valve and 18" air hose.
   E = Electric Rewind – 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.
   HD = Hydraulic Rewind – Not supplied with control valve.
6. Manual rewind available in RT or LB configurations only.
7. **Finish:** Refer to page 3.
8. **Be sure to check dimensions and weights prior to ordering.**
9. Some roller options may prohibit the use of our molded chain guard.

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

*** X, Y indicate mounting holes. See page 2.

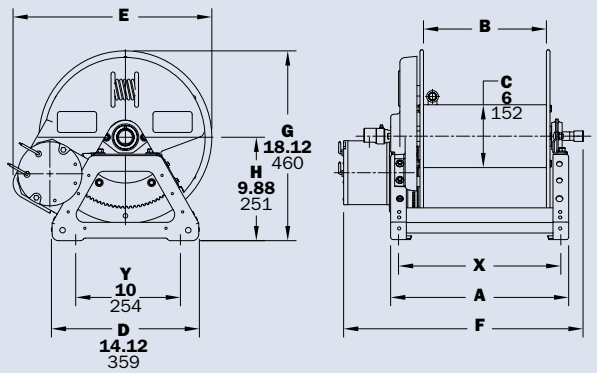

Power rewind shown

Phone: **518-797-3791** | Toll Free: **1-877-467-3357** | FAX: **518-797-3259** | Email: **reels@hannay.com** | **hannay.com**

Series **1800**

• Air Compressors • Washdown • Lawn Care

To handle single 5/8" or 3/4" I.D. hose.

- Lightweight, compact reels designed for long lengths of hose in manual and power rewind.
- Manual rewind reels include: cam-lock drag brake, spring actuated pin lock and direct crank rewind.
- Power rewind reels include: chain and sprocket drive powered by electric, hydraulic or air motor.
- Standard inlet: 90° ball bearing swivel joint, 1" female NPT threads.
- Standard outlet: 3/4" female NPT threads.
- Standard pressures to 2000 psi (138 bar), available up to 4000 psi (276 bar) – must specify.
- Standard fluid temperatures from -40° F to +250 °F (-40° C to +121° C). Optional temperature ratings available - consult factory.
- Optional stainless steel construction and internals – consult factory.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- **Optional HGK-15 Hose Guide Kit:** Includes Hose Guide, handle grip, 2 stainless steel guide rods, 4 mounting blocks, steel mounting bracket set, and all mounting hardware. Must specify when ordering (P/N 9956.2200).

◀ Standard configuration shown with Electric Rewind (E) option

Standard configuration shown ▶ with Crank Rewind

Optional External Mounting Brackets

Part No. 9906.0027.
Add 2-1/2" to the X dimensions shown in the chart.

PARTS DRAWING – ISO 136 (POWER); ISO 180 (MANUAL)

Model Number For power rewind see Note 5	Hose Capacity of Reel shown in feet/meter			Approx. Weight Crank Rewind shown in lb/kg see Note 3			Reel Dimensions*** shown in inches/millimeter						
	I.D. in. / mm	5/8 / 16	3/4 / 19	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.	A	B	E CRANK	E POWER	F CRANK	F POWER	X
	O.D. in. / mm	1 / 25	1-9/32 / 40										
1816-17-18		**75**	**50**	**28**	**80***	**63**	**13**	**8**	**17.5**	**19**	**23.5**	**19.75**	**11.5**
		23	15	13	36	29	330	203	445	483	597	502	292
1822-17-18		**150**	**100**	**30**	**98***	**65**	**19**	**14**	**17.5**	**19**	**29.5**	**25.75**	**17.5**
		46	30	14	45	29	483	356	445	483	749	654	445
1826-17-18		**200**	**125**	**32**	**98***	**67**	**23**	**18**	**17.5**	**19**	**33.5**	**29.75**	**21.5**
		61	38	15	45	30	584	457	445	483	851	756	546
1830-17-18		**250**	**150**	**33**	**110***	**68**	**27**	**22**	**17.5**	**19**	**37.5**	**33.75**	**25.5**
		76	46	15	50	31	686	559	445	483	953	857	648
1836-17-18		**300**	**200**	**36**	**–**	**71**	**33**	**28**	**17.5**	**19**	**43.5**	**39.75**	**31.5**
		91	61	16	–	32	838	711	445	483	1105	1010	800

Notes:

1. Specifications subject to change.
2. Upon request, reels can be supplied with drum lengths other than shown.
3. Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models (does not apply to FedEx or UPS):

	Net lbs/kg	Ship lbs/kg
Electric	**18**/8.2	**18**/8.2
Hydraulic	**15**/6.8	**15**/6.8
Air	**15**/6.8	**15**/6.8

4. Dimension "F" is the overall length of standard model reels.
5. When ordering power rewind models, prefix model number with:
   A = Air Rewind – Supplied with control valve and 18" air hose.
   E = Electric Rewind – 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.
   HD = Hydraulic Rewind – Not supplied with control valve.
6. Manual rewind available in RT or LB configurations only.
7. **Finish:** Refer to page 3.
8. **Be sure to check dimensions and weights prior to ordering.**
9. Some roller options may prohibit the use of our molded chain guard.

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

*** X, Y indicate mounting holes. See page 2.

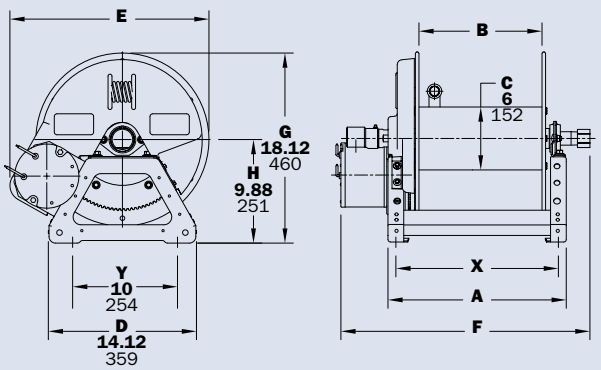

Power rewind shown

Series **2000** | Dual Hose

- **Dual Agent Spray (Lawn Care or Pest Control)**

To handle dual 1/4" through 1/2" I.D. hose.

- Two swivel joint inlets and two outlet risers to handle two equal lengths of hose.
- Chain-driven crank rewind or chain and sprocket rewind powered by an electric or compressed air motor.
- MX crank rewind reels have pinion brake as standard.
- Power rewind reels are not supplied with a brake.
- Standard inlets: 90° ball bearing swivel joints, 1/2" female NPT threads.
- Standard outlets: 1/2" female NPT threads.
- Standard pressures to 3000 psi (207 bar).
- Standard fluid temperatures from -40° F to +250 °F (-40° C to +121° C). Optional temperature ratings available - consult factory.
- Optional stainless steel construction and internals – consult factory.

Standard configuration shown with Electric Rewind (E) option

Optional External Mounting Brackets

Part No. 9906.0027.
Add 2-1/2" to the X dimensions shown in the chart.

PARTS DRAWING – ISO 112

Model Number For power rewind see Note 5	Hose Capacity of Reel shown in feet/meter			Approx. Weight Crank Rewind3 shown in lb/kg see Note 3			Reel Dimensions*** shown in inches/millimeter						
I.D. in. mm	1/4 6	3/8 10	1/2 13	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.	A	B	E CRANK	E POWER	F CRANK	F POWER	X
O.D. in. mm	5/8 16	3/4 19	7/8 22										
2016-17-18	**2/100** 2/31	**2/75** 2/23	**2/50** 2/15	**32** 15	**80*** 36	**67** 30	**13** 330	**8** 203	**19.06** 484	**19** 483	**21** 533	**20.88** 530	**11.5** 292
2020-17-18	**2/175** 2/53	**2/125** 2/38	**2/75** 2/23	**34** 15	**98*** 45	**69** 31	**17** 432	**12** 305	**19.06** 484	**19** 483	**25** 635	**24.88** 632	**15.5** 394
2026-17-18	**2/275** 2/84	**2/200** 2/61	**2/125** 2/38	**36** 16	**110*** 50	**71** 32	**23** 584	**18** 457	**19.06** 484	**19** 483	**31** 787	**30.88** 784	**21.5** 546
2030-17-18	**–** –	**2/250** 2/76	**2/175** 2/53	**37** 17	**–** –	**72** 33	**27** 686	**22** 559	**19.06** 484	**19** 483	**35** 889	**34.88** 886	**25.5** 648
2036-17-18	**–** –	**2/300** 2/91	**2/225** 2/69	**39** 18	**–** –	**74** 34	**33** 838	**28** 711	**19.06** 484	**19** 483	**41** 1041	**40.88** 1038	**31.5** 800

Notes:

1. Specifications subject to change.
2. Upon request, reels can be supplied with drum lengths other than shown.
3. Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models (does not apply to FedEx or UPS):

	Net lbs/kg	Ship lbs/kg
Electric	**18**/8.2	**18**/8.2
Air	**15**/6.8	**15**/6.8

4. Dimension "F" is the overall length of standard model reels. MX chain-drive crank models require 2" clearance to remove crank handle.
5. When ordering power rewind models, prefix model number with:
   A = Air Rewind – Supplied with control valve and 18" air hose.
   E = Electric Rewind – 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.
   MX = Chain-Driven Crank.
6. **Finish:** Refer to page 3.
7. **Be sure to check dimensions and weights prior to ordering.**
8. Some roller options may prohibit the use of our molded chain guard.

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

*** X, Y indicate mounting holes. See page 2.

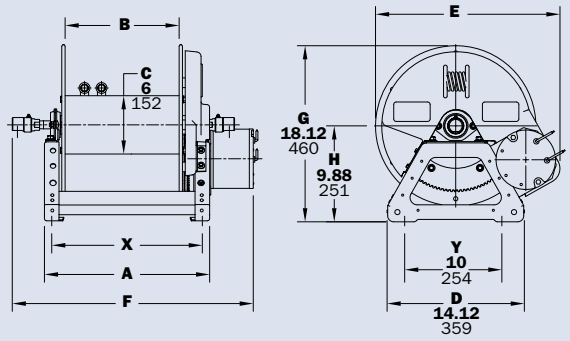

Power rewind shown

Phone: **518-797-3791** | Toll Free: **1-877-467-3357** | FAX: **518-797-3259** | Email: **reels@hannay.com** | **hannay.com**

Series **4000**

• Water Supply • Fire Protection
• Chemical Transfer

To handle single 3/4" or 1" I.D. hose.

- Lightweight, compact reels designed for long lengths of hose in manual and power rewind.
- Manual rewind reels include: cam-lock drag brake, spring actuated pin lock and removable direct crank rewind.
- Power rewind reels include: chain and sprocket drive powered by electric, hydraulic or air. Strap brake is standard.
- Standard inlet: 90° ball bearing swivel joint, 1" female NPT threads.
- Standard outlet: 1" female NPT threads.
- Standard pressures to 2000 psi (138 bar), available up to 4000 psi (276 bar) – must specify.
- Standard fluid temperatures from -40° F to +250 °F (-40° C to +121° C). Optional temperature ratings available - consult factory.
- Optional stainless steel construction and internals – consult factory.
- Rollers and roller mounting brackets are accessory items. Specify roller position.

Standard configuration shown with Electric Rewind (E) option

Optional External Mounting Brackets

Part No. 9906.0027.

Add 2-1/2" to the X dimensions shown in the chart.

PARTS DRAWING – ISO 68 (POWER); ISO 125 (MANUAL)

Model Number For power rewind see Note 5	Hose Capacity of Reel shown in feet/meter			Approx. Weight Crank Rewind shown in lb/kg see Note 3			Reel Dimensions*** shown in inches/millimeter						
	I.D. in. mm	3/4 19	1 25	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.	A	B	E CRANK	E POWER	F CRANK	F POWER	X
	O.D. in. mm	1-9/32 33	1-9/16 40										
4018-17-18		**50** 15	**35** 11	**36** 16	**80*** 36	**71** 32	**15** 381	**10** 254	**17.5** 445	**19** 483	**26.5** 673	**20.75** 527	**13.5** 343
4024-17-18		**100** 30	**50** 15	**46** 21	**98*** 45	**81** 37	**21** 533	**16** 406	**17.5** 445	**19** 483	**32.5** 826	**26.75** 679	**19.5** 495
4030-17-18		**150** 46	**75** 23	**57** 26	**110*** 50	**92** 42	**27** 686	**22** 559	**17.5** 445	**19** 483	**38.5** 978	**32.75** 832	**25.5** 648
4038-17-18		**200** 61	**100** 30	**70** 32	**–** –	**124** 56	**35** 889	**30** 762	**17.5** 445	**19** 483	**46.5** 1181	**40.75** 1035	**33.5** 851

Notes:

1. Specifications subject to change.
2. Upon request, reels can be supplied with drum lengths other than shown.
3. Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models (does not apply to FedEx or UPS):

	Net lbs/kg	Ship lbs/kg
Electric	**18**/8.2	**18**/8.2
Hydraulic	**15**/6.8	**15**/6.8
Air	**15**/6.8	**15**/6.8

4. Dimension "F" is the overall length of standard model reels. Crank rewind reels require 3-1/2" clearance to remove or install crank handle.
5. When ordering power rewind models, prefix model number with:
   A = Air Rewind – Supplied with control valve and 18" air hose.
   E = Electric Rewind – 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.
   HD = Hydraulic Rewind – Not supplied with control valve.
6. **Finish:** Refer to page 3.
7. **Be sure to check dimensions and weights prior to ordering.**
8. Some roller options may prohibit the use of our molded chain guard.

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

*** X, Y indicate mounting holes. See page 2. (Also applies for external mounting brackets.)

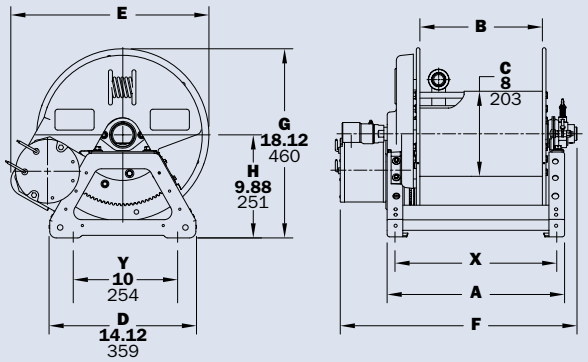

Power rewind shown

Series **6000**

- **Washdown Operations • Tank Filling**
- **Water Blasting* • Sewer Cleaning***

To handle single 1/2" through 1" I.D. hose.

- Heavy-duty reel for longer lengths of hose.
- Choose gear-driven crank rewind or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Crank rewind reels supplied with pinion brake; power rewind reels with a strap brake.
- Standard inlet: 90° ball bearing swivel joint, 1" female NPT threads.
- Standard outlet: 1" female NPT threads.
- Standard: inlet, outlet riser, and hub assembly are steel. Options: swivel joint also available in aluminum or stainless steel. Riser and hub assembly also available in stainless steel.
- Standard pressures to 2000 psi (138 bar), available up to 5000 psi (345 bar) – must specify.
- Standard fluid temperatures from -40° F to +250 °F (-40° C to +121° C). Optional temperature ratings available - consult factory.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- Consult factory for optional chain guard.

* Heavy-duty construction required for water blasting and sewer cleaning applications. Consult factory.

Standard configuration shown
with Electric Rewind (EP) option

Optional Auxiliary Rewind

Ring and pinion shaft rewind unit with removable crank handle.

Optional Assembly
C2 roller top wind and auxiliary rewind shown

Phone: **518-797-3791** | Toll Free: **1-877-467-3357** | FAX: **518-797-3259** | Email: **reels@hannay.com** | **hannay.com**

Series **6000**

• Washdown Operations • Tank Filling
• Water Blasting • Sewer Cleaning

PARTS DRAWING – ISO 84

Model Number For power rewind see Note 5	Hose Capacity of Reel shown in feet / meter				Approx. Weight Crank Rewind shown in lb/kg see Note 4		Reel Dimensions*** shown in inches/millimeter									
	I.D. in. / mm	1/2 / 13	3/4 / 19	1 / 25	NET	SHIP	A	B	D	E	F CRANK	F POWER	G	H	X	Y
	O.D. in. / mm	7/8 / 22	1-9/32 / 33	1-1/2 / 38												
6024-19-21-10.5		**200** / 61	**100** / 30	**60** / 18	**85** / 39	**127** / 58	**21** / 533	**15.5** / 394	**20.5** / 521	**18.75** / 476	**25.38** / 645	**28.75** / 730	**21.5** / 546	**12.12** / 308	**13** / 330	**16.75** / 425
6032-19-21-10.5		**325** / 99	**175** / 53	**85** / 26	**102** / 46	**144** / 65	**29.5** / 749	**24** / 610	**20.5** / 521	**18.75** / 476	**33.88** / 861	**37.25** / 946	**21.5** / 546	**12.12** / 308	**21.5** / 546	**16.75** / 425
6024-23-24-10.5		**400** / 122	**150** / 46	**125** / 38	**92** / 42	**134** / 61	**21** / 533	**15.5** / 394	**20.5** / 521	**22.75** / 578	**25.38** / 645	**28.75** / 730	**23.5** / 597	**12.12** / 308	**13** / 330	**16.75** / 425
6030-23-24-10.5		**–** / –	**225** / 68	**200** / 61	**105** / 48	**147** / 67	**27.5** / 699	**22** / 559	**20.5** / 521	**22.75** / 578	**31.88** / 810	**35.25** / 895	**23.5** / 597	**12.12** / 308	**19.5** / 495	**16.75** / 425
6038-23-24-10.5		**–** / –	**300** / 91	**250** / 76	**120** / 54	**162** / 73	**35** / 889	**29.5** / 749	**20.5** / 521	**22.75** / 578	**39.38** / 1000	**42.75** / 1086	**23.5** / 597	**12.12** / 308	**27** / 686	**16.75** / 425
6016-25-26-10.5		**250** / 76	**100** / 30	**75** / 23	**88** / 40	**130** / 59	**13** / 330	**7.5** / 191	**25.5** / 648	**24.75** / 629	**17.38** / 441	**20.75** / 527	**27.88** / 708	**15.5** / 394	**7.75** / 197	**21.75** / 552
6022-25-26-10.5		**450** / 137	**175** / 84	**125** / 38	**100** / 45	**142** / 64	**19** / 483	**13.5** / 343	**25.5** / 648	**24.75** / 629	**23.38** / 594	**26.75** / 679	**27.88** / 708	**15.5** / 394	**11** / 279	**21.75** / 552
6028-25-26-10.5		**–** / –	**275** / 84	**175** / 53	**113** / 51	**155** / 70	**25.5** / 648	**20** / 508	**25.5** / 648	**24.75** / 629	**29.88** / 759	**33.25** / 845	**27.88** / 708	**15.5** / 394	**17.5** / 445	**21.75** / 552
6018-30-31-10.5		**400** / 122	**200** / 61	**150** / 46	**101** / 46	**151** / 68	**15** / 381	**9.5** / 241	**25.5** / 648	**28.75** / 730	**19.38** / 492	**22.75** / 578	**29.88** / 759	**15.5** / 394	**7** / 178	**21.75** / 552
6024-30-31-10.5		**–** / –	**350** / 107	**250** / 76	**113** / 51	**163** / 74	**21** / 533	**15.5** / 394	**25.5** / 648	**28.75** / 730	**25.38** / 645	**28.75** / 730	**29.88** / 759	**15.5** / 394	**13** / 330	**21.75** / 552
6028-30-31-10.5		**–** / –	**–** / –	**300** / 91	**121** / 55	**171** / 78	**25.5** / 648	**20** / 508	**25.5** / 648	**28.75** / 730	**29.88** / 759	**33.25** / 845	**29.88** / 759	**15.5** / 394	**17.5** / 445	**21.75** / 552
†6028-33-34-10.5		**–** / –	**–** / –	**400** / 122	**129** / 59	**179** / 81	**25** / 635	**20** / 508	**31.5** / 800	**31.75** / 806	**29.75** / 756	**33** / 838	**33.63** / 854	**17.75** / 451	**17.5** / 445	**27.75** / 705

Notes:

1. Specifications subject to change.
2. Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
3. Dimensions shown for reels up to and including 30-31 disc size reflect pressed frames. All others are rollformed channel frames.
4. Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models.

	Net lbs/kg	Ship lbs/kg
Electric	**40**/18.1	**40**/18.1
Hydraulic	**20**/9.1	**20**/9.1
Air	**20**/9.1	**20**/9.1

5. When ordering power rewind models, prefix model number with:
   A = Air Rewind – Supplied with control valve and 18" air hose.
   EP = Electric Rewind (1/2 HP) – 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.
   EPJ = Explosion Proof Electric Rewind (1/2 HP) (supplied with explosion proof switch, solenoid, and junction box). NOTE: **ADD** 1.5" to F dimension for EPJ models.
   HD = Hydraulic Rewind – Not supplied with control valve.
6. **Finish:** Refer to page 3.
7. **Be sure to check dimensions and weights prior to ordering.**

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

*** X, Y indicate mounting holes.
See page 5.

† Some applications require a clutch/reduction unit.

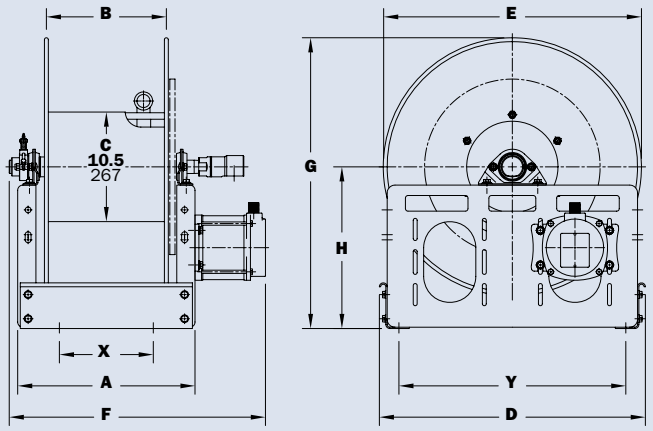

Power rewind shown

Series **RM**

To handle single 3/8" through 1/2" I.D. hose.

- Heavy-duty 12v DC 1/3 HP electric reel.
- Standard ("RM") Models – Rewind only, hose is pulled out manually.
- Optional ("RM-REV") Models – Reversible motor. Features both Rewind and Unwind.
- Variable speed control allows user to choose comfortable rewind speed.
- Long-range (over 500 ft. range) pocket-sized remote, operating on 340 MHz band.
- Adjustable brake prevents hose creep during transit.
- Standard inlet: 90° ball bearing swivel joint, 1/2" female NPT threads.
- Standard outlet: 1/2" female NPT. Optional outlet: 3/8" female NPT or 3/4" male GHT (garden thread). Must specify outlet when ordering.
- Pressures to 3000 psi (207 bar).
- Standard fluid temperatures from +32° F to +400 °F (0° C to +204° C). Optional temperature ratings available - consult factory.
- Chain guard is standard.
- No electromechanical components that can break (relays, solenoids, circuit breakers). Simple direct wiring directly to motor and battery.
- Overcurrent and under-voltage protection are all built into the electronics.
- Remote transmitter is uniquely paired with base receiver to prevent interference.

RME 6014-28-29-8
Shown with 300 ft. of 3/8" hose (not included)

RM Remote
Long-range handheld remote control

Model Number	Hose Capacity of Reel shown in feet/meter		Approx. Weight shown in lb/kg		Reel Dimensions*** shown in inches/millimeter									
I.D. in. / mm	3/8 / 10	1/2 / 13	NET	SHIP	A	B	C	D	E	F	G	H	X	Y
O.D. in. / mm	5/8 / 16	7/8 / 22												
RME6014-28-29-8	**300** / 91	**150** / 46	**130** / 59	**160** / 73	**10.5** / 267	**5.5** / 140	**8** / 203	**27** / 686	**26.75** / 679	**16.5** / 419	**28.25** / 718	**14.88** / 378	**5.75** / 146	**23.25** / 591
RME6014-33-34-10.5	**500** / 152	**300** / 91	**137** / 62	**167** / 76	**10.5** / 267	**5.5** / 140	**10.5** / 267	**31.5** / 800	**31.75** / 806	**16.5** / 419	**33.63** / 854	**17.75** / 451	**5.75** / 146	**27.75** / 705
RME6014-28-29-8-REV	**300** / 91	**150** / 46	**130** / 59	**160** / 73	**10.5** / 267	**5.5** / 140	**8** / 203	**27** / 686	**26.75** / 679	**16.5** / 419	**28.25** / 718	**14.88** / 378	**5.75** / 146	**23.25** / 591
RME6014-33-34-10.5-REV	**500** / 152	**300** / 91	**137** / 62	**167** / 76	**10.5** / 267	**5.5** / 140	**10.5** / 267	**31.5** / 800	**31.75** / 806	**16.5** / 419	**33.63** / 854	**17.75** / 451	**5.75** / 146	**27.75** / 705

Notes:

1. Specifications subject to change.
2. **Finish:** Refer to page 3.
3. **Be sure to check dimensions and weights prior to ordering.**
4. Above reels cannot be shipped via parcel post (UPS or FedEx Ground).

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

*** X, Y indicate mounting holes. See page 2.

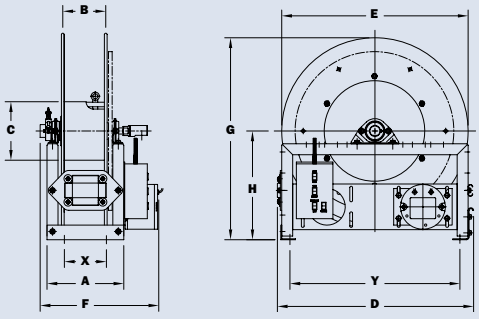

Phone: **518-797-3791** | Toll Free: **1-877-467-3357** | FAX: **518-797-3259** | Email: **reels@hannay.com** | **hannay.com**

Series **SNC**

• Lawn Care • Pest Control • Fertilizer Mixes

To handle single 3/8" through 5/8" I.D. hose.

- Lightweight, low-profile reels designed for hose lengths up to 500 ft.
- Primarily 304 SST construction, including discs, axle hub, and welded frame.
- Non-SST components: Drum (Aluminum), Swivel Joint and Bearings (Plated).
- Manual (direct crank) reels include both pin lock and 3-position cam-lock drag brake.
- Electric rewind reels (denoted by letter 'E' at end of model) feature plated chain/sprocket drive with guard.
- Standard inlet: 90° full-flow swivel, 1/2" FNPT threads. Standard outlet: 1/2" FNPT threads.
- Standard pressure rated to 3000 psi (207) bar. Standard fluid temperatures from +32° F to +400 °F (0° C to +204° C).
- Consult factory for other pressures and temperatures.

Options:

- 304 SST stackable frame for up to two reels.*
- SST rollers and roller mounting brackets.
- Drum, swivel joint and bearings all upgradeable to SST.
- Power rewind reels: available in 12 or 24VDC, as well as 115VAC.

***Note:** Up to two reels can be stacked in any combination, allowing for different applications and power rewind preference. Triple-stacking reels by mounting two stacking kits together is not supported and will void all warranties.*

Model SNC-18 ►
manual rewind reel
with optional rollers

◄ Model SNC-18E
Electric Rewind (E) (hose not included)

Model SNC-18 ►
two manual rewind reels shown
with optional stacking frame and rollers

Model Number	Hose Capacity of Reel shown in feet/meter				Approx. Weight shown in lb/kg			Reel Dimensions*** shown in inches/millimeter				
	I.D. in. / mm	3/8 / 10	1/2 / 13	5/8 / 16	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.	A	B	E	F	X
	O.D. in. / mm	.65 / 17	.81 / 21	1 / 25								
SNC-12		**300**	**200**	**125**	**29**	**80***	**64**	**17**	**12**	**17.5**	**25.62**	**15.5**
		84	53	38	13	36	29	432	305	445	651	394
SNC-18		**400**	**300**	**200**	**31**	**98***	**66**	**23**	**18**	**17.5**	**31.62**	**21.5**
		122	91	61	14	45	30	584	457	445	803	546
SNC-22		**500**	**400**	**275**	**33**	**110***	**68**	**27**	**22**	**17.5**	**35.62**	**25.5**
		152	114	84	15	50	31	686	559	445	905	648
SNC-12E		**300**	**200**	**125**	**47**	**80***	**82**	**17**	**12**	**19**	**23**	**15.5**
		84	53	38	21	36	37	432	305	483	584	394
SNC-18E		**400**	**300**	**200**	**49**	**98***	**84**	**23**	**18**	**19**	**29**	**21.5**
		122	91	61	22	45	38	584	457	483	737	546
SNC-22E		**500**	**400**	**275**	**51**	**110***	**86**	**27**	**22**	**19**	**33**	**25.5**
		152	114	84	23	50	39	686	559	483	838	648

Notes:

1. Specifications subject to change.
2. Other models available than those shown.
3. Dimension "F" is the overall length of standard model reels.
4. Electric rewind reels indicated with 'E' in model suffix (example - SNC-12E).
5. Be sure to check dimensions and weights prior to ordering.

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.
* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).
*** X, Y indicate mounting holes.

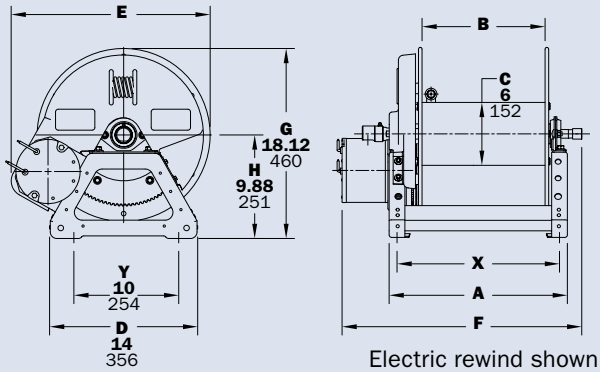

Electric rewind shown

Find reels for every need.

Learn more about all of our reels, including specs, drawings, and even how to select the right reels and accessories for your industry.



Industrial Hose Reels

- High pressure/low pressure reels
- Air/Lube/Grease reels
- Fueling
- Washdown/Power Wash
- Industrial Fire Protection
- Hydraulic/Pneumatic applications
- Hose storage



Ordering & Accessory Guide

- Selecting the right reel
- Reel components
- Available accessories
- How to spec and order reels and accessories
- Ordering options
- Hannay Reels policies



Cable Reels

- Electric Tools
- Crane operations
- Portable LIghting
- Live and storage reels
- Video/Broadcast
- Static and Utility grounding reels

Stainless Steel Reels

- Washdown/Power Wash
- Food & Beverage Processing
- Chemical Processing
- Potable Water
- Fueling
- Steam Cleaning



Welding Reels

- Mobile and fixed installations
- Arc welding
- Gas welding
- Cutting operations

View all our reel catalogs online at hannay.com

Family owned and operated since 1933, Hannay Reels is the world leader in both OEM and aftermarket applications. Hannay offers thousands of standard hose reel and cable reel models, as well as unmatched custom capabilities. We can easily and affordably customize a reel to meet your exact specifications – built to last, delivered fast. Additional catalogs are available through your local Hannay Reels dealer or online at **hannay.com.**

Hannay Reels®
The reel leader.

553 State Route 143 | Westerlo, New York 12193
Email: reels@hannay.com | **hannay.com**

All Hannay reels are constructed of quality heavy gauge steel (optional aluminum or stainless steel also available on most models).