


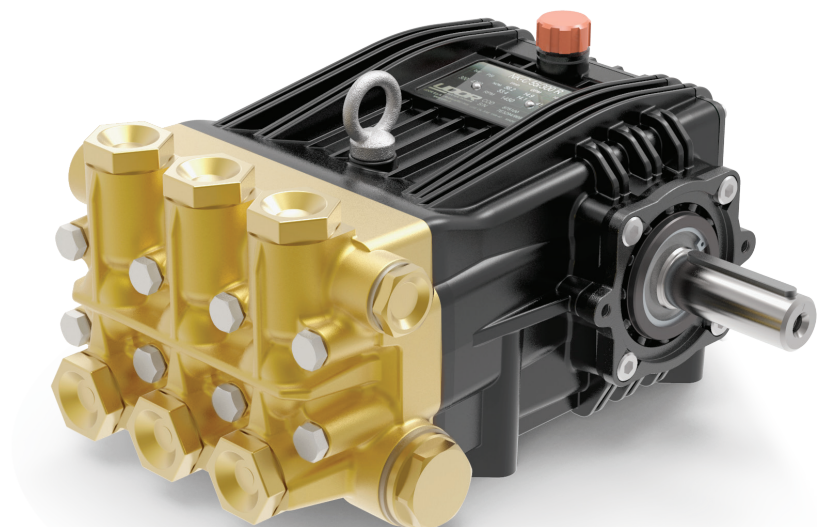

- Brass Manifold
- Solid Ceramic Plungers
- Stainless Steel Plunger Guides and Check Valves
- Bronze Connecting Rods
- Heavy Duty Flat Base High Pressure Seals
- 57.6 oz. Capacity Vented Oil Bath Crank Case
- Max Fluid Temp, 160°F

NKC Series 30mm Keyed Solid Shaft Plunger Pumps

NKC Series super duty plunger pumps include a wide range of models with flow rates from 9.1 to 37.8 GPM and pressures up to 5075 PSI.

Other drive options include gas engine gear reduction and hydraulic motor flange

Applications include general pressure cleaning,, construction, hydro-excavation UHP fire fighting, mining and street cleaning.


		Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
			GPM	l/min	PSI	bar		Stroke	Code				
1450 RPM	A	NKC 35/350 R	9.1	34.6	5075	350	22mm	22.0mm	3	31.0 EBHP	6061.10	6061.J1	67 lbs
	A	NKC 47/350 R	12.5	47.1	5075	350	22mm	30.0mm	F	42.5 EBHP	6061.10	6061.J1	67 lbs
	A	NKC 55/300 R	14.1	53.4	4350	300	22mm	34.0mm	7	41.1 EBHP	6061.10	6061.J1	67 lbs
	A	NKC 60/250 R	16.1	60.9	3625	250	25mm	30.0mm	F	39.0 EBHP	6061.11	6061.94	67 lbs
	A	NKC 70/250 R	18.2	69.0	3625	250	25mm	34.0mm	7	44.2 EBHP	6061.11	6061.94	67 lbs
	B	NKC 75/170 R	19.9	75.1	2465	170	28mm	30.0mm	F	32.8 EBHP	6061.12	6061.M6	67 lbs
	B	NKC 85/170 R	23.0	87.0	2465	170	28mm	34.0mm	7	37.9 EBHP	6061.12	6061.M6	67 lbs
	B	NKC 100/150 R	26.4	100.0	2175	150	30mm	34.0mm	7	38.4 EBHP	6072.02	6061.M6	67 lbs
	C	NKC 130/130 R	33.3	126.2	1885	130	36mm	30.0mm	F	42.1 EBHP	6061.Q1	6061.S7	67 lbs
	C	NKC 145/100 R	37.8	143.0	1450	100	36mm	34.0mm	7	36.7 EBHP	6061.Q1	6061.S7	67 lbs

NOTE: All pump models available with left-hand drive option. Substitute 'L' for 'R' in model number when ordering (ex. NKC 145/100 L)



MAX FLOW
MAX PRESSURE
RATED PUMP SPEED
POWER REQUIREMENT
LUBRICATION

26.4 GPM / 100.0 L/MIN
2175 PSI / 150 BAR
1450 RPM
38.4 HP ELECTRIC
57.6 OZ UDOR LUBE

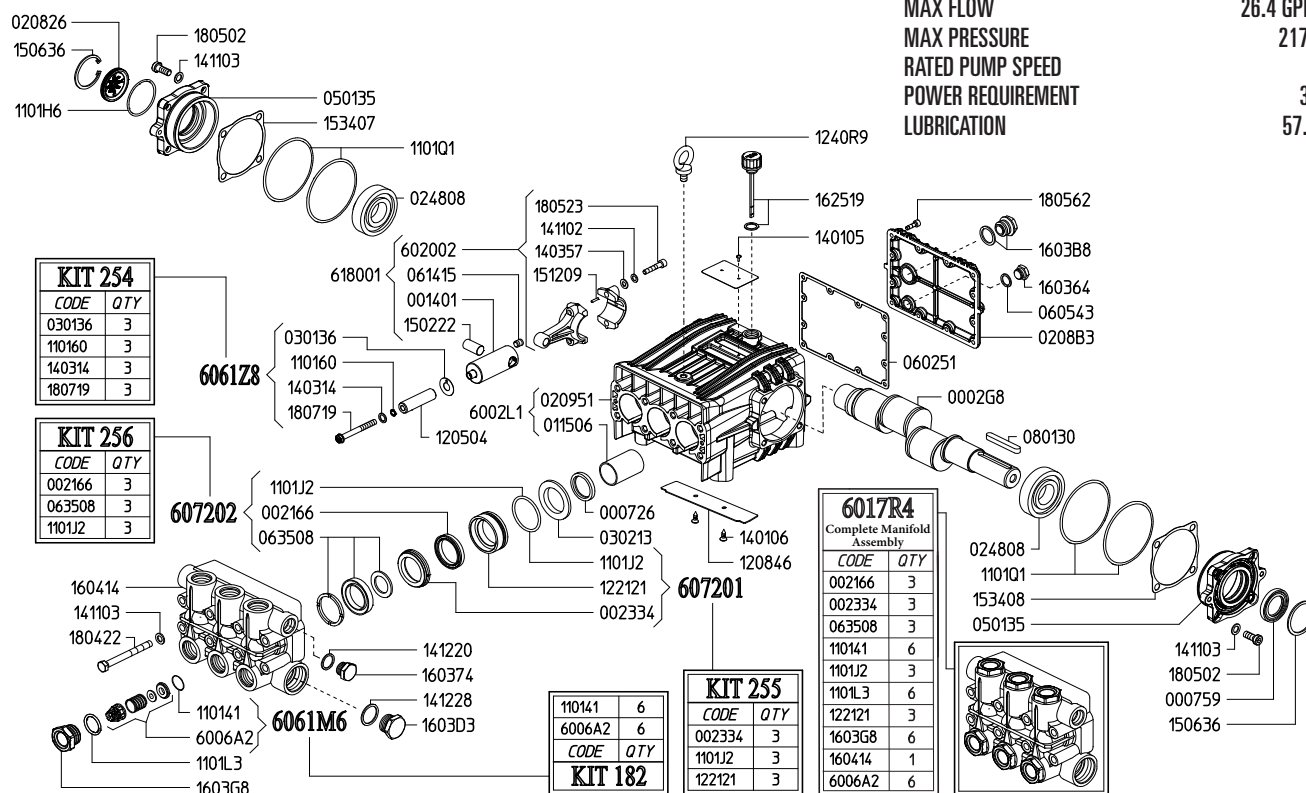

Revised 2-23-2022

Part #	Description	Qty
0002.G8	CRANKSHAFT 30MM	1
0007.26	OIL SEAL D35	3
0007.59	OIL SEAL	1
0014.01	PLUNGER GUIDE	3
0021.66	LOW PRESSURE SEAL D30 ^{B E}	3
0023.34	UPPER RING D30 ^{D E}	3
0115.06	BUSHING D35	3
0208.26	OIL SIGHT GLASS	1
0208.B3	BACK COVER	1
0209.51	CRANKCASE	1
0248.08	BALL BEARING	2
0301.36	SLINGER RING ^A	3
0302.13	SPACER	3
0501.35	BEARING FLANGE	2
0602.51	GASKET - PUMP BODY	1
0605.43	GASKET - D17	1
0614.15	SET SCREW	3
0635.08	HIGH PRESSURE SEAL KIT D30 ^{B E}	3
0801.30	KEY	1
1101.41	O-RING - VALVE ^{C E}	6
1101.60	O-RING - PLUNGER BOLT ^A	3
1101.H6	O-RING - OIL SIGHT GLASS	1
1101.J2	O-RING - PRESSURE RING ^{B D E}	3
1101.L3	O-RING - VALVE PLUG ^E	6
1101.Q1	O-RING - BEARING FLANGE	4
1205.04	CERAMIC PLUNGER D30	3
1208.46	PLATE	1
1221.21	PRESSURE RING D30 ^{D E}	3
1240.R9	LIFTING HOOK M10	1
1401.05	RIVET 3.5X8	2
1401.06	RIVET D4X10	2
1403.14	WASHER - PLUNGER BOLT ^A	3
1403.57	WASHER M8	6
1411.02	SERRATED WASHER D8	6

Part #	Description	Qty
1411.03	WASHER	16
1412.20	BONDED WASHER D27.05 (G3/4")	1
1412.28	BONDED WASHER D42.9 (G1-1/4")	1
1502.22	PIN	3
1506.36	SNAP RING	2
1512.09	PIN D5X20	6
1534.07	GASKET - BEARING FLANGE	1
1534.08	SPACER / GASKET	1
1603.64	PLUG 3/8"	1
1603.74	PLUG G3/4"	1
1603.B8	OIL SIGHT GLASS W/GASKET	1
1603.D3	PLUG G1-1/4"	1
1603.G8	VALVE PLUG D28/30 ^E	6
1604.14	HEAD D28/30 ^E	1
1625.19	OIL CAP W/GASKET	1
1804.22	HEX BOLT M10X100	8
1805.02	ALLEN BOLT	8
1805.23	ALLEN BOLT M8X40	6
1805.62	ALLEN BOLT M6X20	12
1807.19	PLUNGER BOLT ^A	3
6002.L1	CRANKCASE ASSEMBLY	1
6006.A2	VALVE ASSEMBLY W/O O-RING ^{C E}	6
6017.R4	COMPLETE MANIFOLD ASSEMBLY NK D30	1
6020.02	CONNECTING ROD	3
6180.01	CONNECTING ROD ASS'Y COMPLETE	3
6061.M6	VALVE KIT (KIT 182)	1
6061.Z8	PLUNGER BOLT KIT (KIT 254)	1
6072.01	BRASS RING KIT D30 (KIT 255)	1
6072.02	WATER SEAL KIT (KIT 256)	1

^A Parts in 6061.Z8 (Kit 254).

^B Parts in 6072.02 (Kit 256).



^C Parts in 6061.M6 (Kit 182).

^D Parts in 6072.01 (Kit 255).

^E Parts in 6017.R4 (Complete Manifold Assembly).

*Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937*

NK SERIES PUMPS 28mm & 30mm Plungers

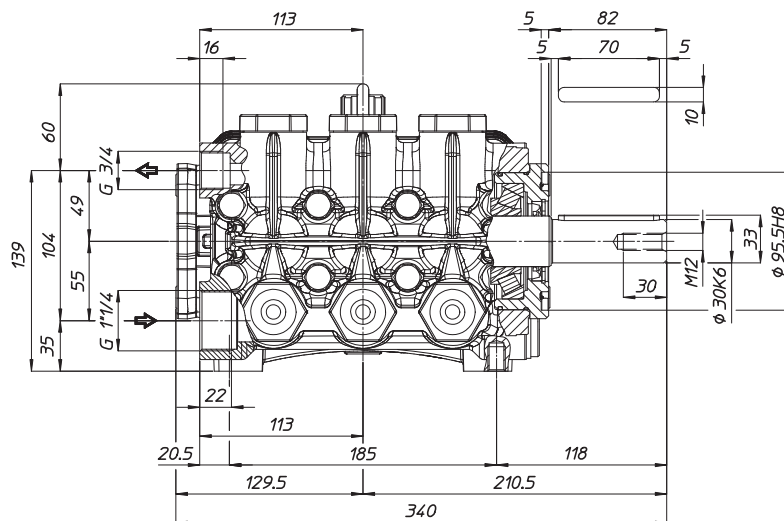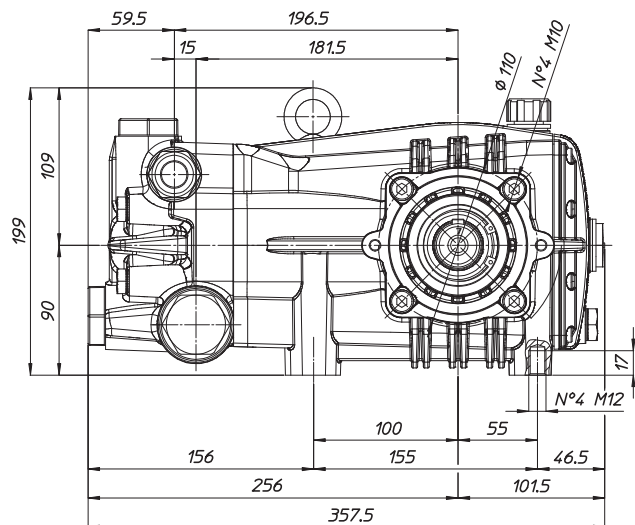

TORQUE SPECS

Ref.	Description	Ft./lb.	Nm	Loctite®
1	Head Bolts	37	50	-
2	Valve Caps	88	120	243
3	Inlet Cap	133	180	-
4	Outlet Cap	88	120	243
5	Bearing Flange Bolts	37	50	-
6	Rear Cover Bolts	8	11	-
7	Connecting Rod Bolts	19	25	243
8	Plunger Bolts	22	30	270
9	Valve Cover Bolts	-	-	-
10	Oil Drain Plug	8	11	-

