


MAX OUTPUT
MAX OUTPUT
RATED PUMP SPEED
POWER REQUIREMENT
LUBRICATION

4.0 GPM / 15.0 L/MIN
2900 PSI / 200 BAR
3400 RPM
11.0 HP GAS
11.5 OZ UDOR LUBE

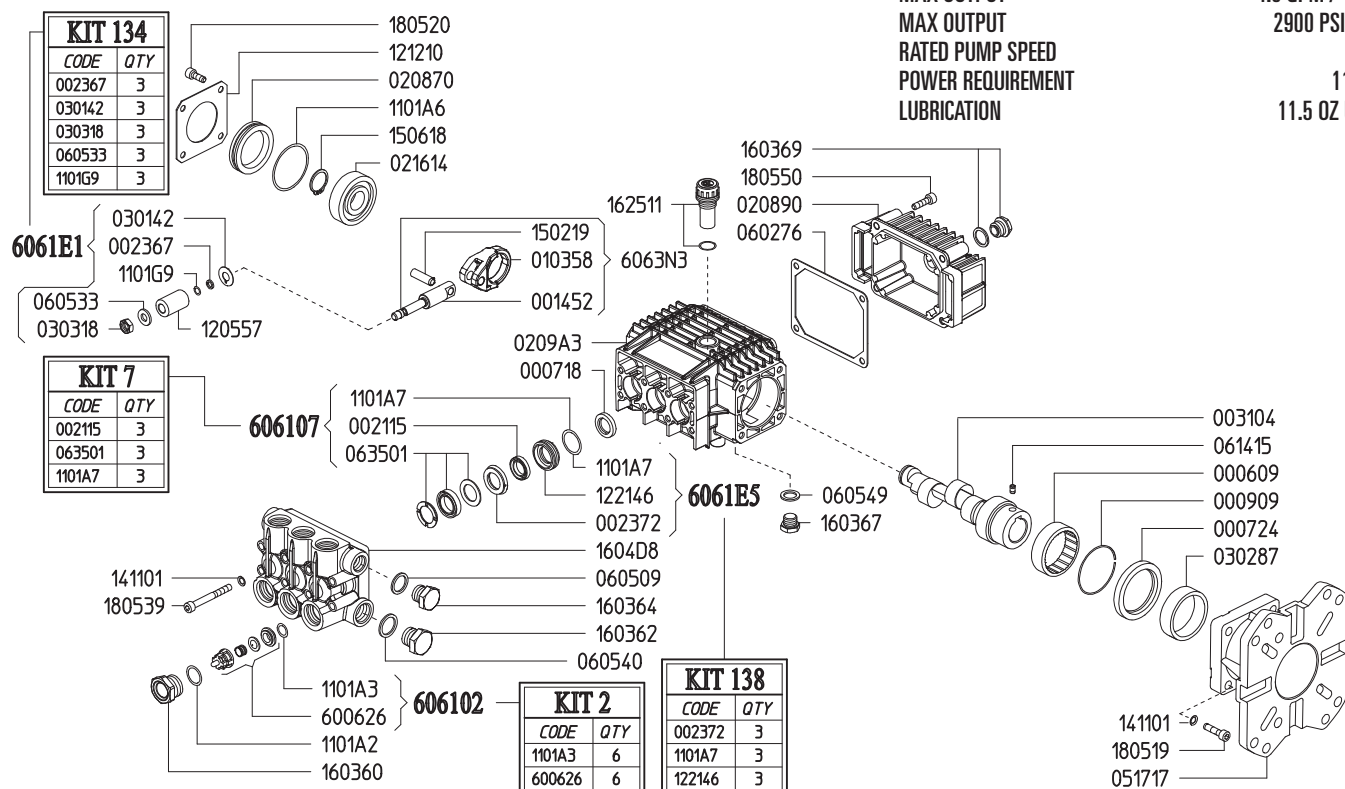



Revised 2-21-2022

Part #	Description	Qty	Part #	Description	Qty
0006.09	BUSHING D45	1	1101.A7	O-RING - PRESSURE RING ^{C D}	3
0007.18	OIL SEAL D15X24X5	3	1101.G9	O-RING - PLUNGER GUIDE ^B	3
0007.24	OIL SEAL D40	1	1205.57	CERAMIC PLUNGER D15	3
0009.09	ELASTIC RING D52X2.5	1	1212.10	METAL COVER	1
0014.52	PLUNGER GUIDE D15/18	3	1221.46	PRESSURE RING D15 ^D	3
0021.15	WATER SEAL L.P. D15 ^C	3	1411.01	SERATED WASHER D6	12
0023.67	RING D5.2X8X1.3 ^B	3	1502.19	PIN D8X26	3
0023.72	UPPER RING D15 ^D	3	1506.18	SNAP RING D25	1
0031.04	HOLLOW SHAFT D1"	1	1603.60	VALVE PLUG PISTON D15/18/20	6
0103.58	CONNECTING ROD	3	1603.62	PLUG G1/2	1
0208.70	COVER	1	1603.64	PLUG G3/8	1
0208.90	BACK COVER - DEEP	1	1603.67	PLUG G1/4	1
0209.A3	CRANKCASE	1	1603.69	OIL PLUG G1/4+GASKET	1
0216.14	ROLLER BEARING D25	1	1604.D8	HEAD PISTON D15/18	1
0301.42	DISC ^B	3	1625.11	OIL PLUG G3/8	1
0302.87	SPACER	1	1805.19	ALLEN BOLT M6X25	4
0303.18	NUT M8XH5 ^B	3	1805.20	ALLEN BOLT M6X16	4
0517.17	GAS ENGINE FLANGE	1	1805.39	ALLEN BOLT M6X60	8
0602.76	BACK COVER GASKET	1	1805.50	ALLEN BOLT M6X35	4
0605.09	GASKET D17X23X1.5 (G3/8)	1	6006.26	VALVE ASSEMBLY W/O O-RING ^A	6
0605.33	GASKET D8X14X2 ^B	3	6063.N3	COMPLETE ROD ASSEMBLY D15/18	3
0605.40	GASKET D21.5X27X1.5 (G1/2) ALL	1	6061.02	VALVE KIT (KIT 2)	1
0605.49	GASKET D13X19X1.5	1	6061.07	WATER SEAL KIT D15 (KIT 7)	1
0614.15	SET SCREW M5X8 UNI5929	1	6061.E1	PLUNGER KIT D18 (KIT 134)	1
0635.01	HIGH PRESSURE SEAL KIT D15 ^C	3	6061.E5	BRASS RING KIT D15 (KIT 138)	1
1101.A2	O-RING - VALVE CAP	6			
1101.A3	O-RING - VALVE ^A	6			
1101.A6	O-RING - BEARING COVER	1			

^A Parts in 6061.02 (Kit 2).
^B Parts in 6061.E1 (Kit 134).
^C Parts in 6061.07 (Kit 7).
^D Parts in 6061.E5 (Kit 138).

*Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937*

PK SERIES PUMPS - 1" HOLLOW SHAFT w/ GAS ENGINE FLANGE

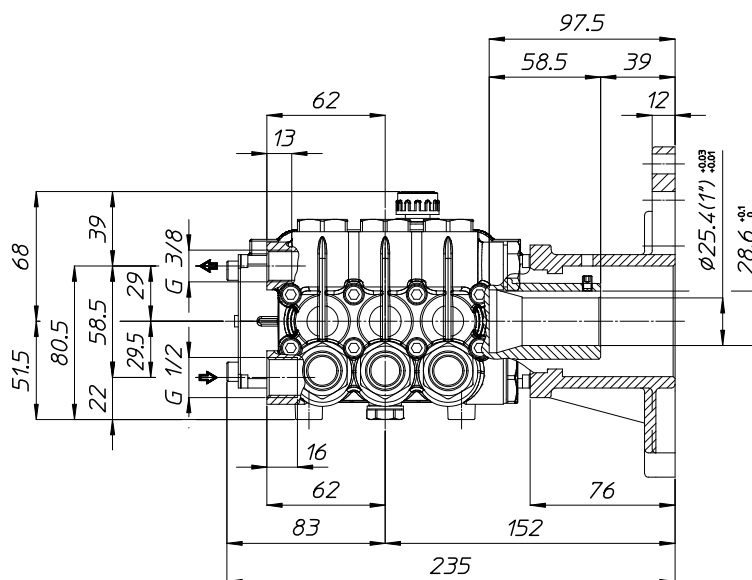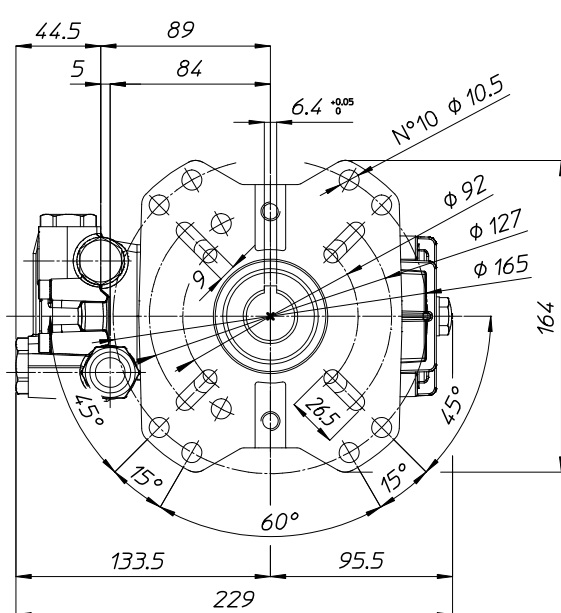

TORQUE SPECS

Ref.	Description	Ft./lb.	Nm	Loctite®
1	Head Bolts	8	11	-
2	Valve Caps	75	100	243
3	Inlet Cap	80	110	-
4	Outlet Cap	60	80	243
5	Bearing Flange Bolts	8	11	-
6	Rear Cover Bolts	8	11	-
7	Connecting Rod Bolts	-	-	-
8	Plunger Bolts	11	15	270
9	Valve Cover Bolts	-	-	-
10	Oil Drain Plug	6	8	-

