


1450 RPM INDUSTRIAL USE

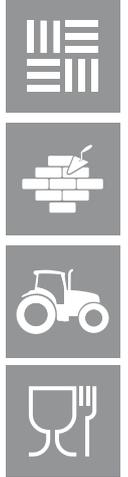

Caratteristiche Generali

- Robusto telaio e mantello inox
- Pompa a 3 pistoni in ceramica
- Testa pompa in ottone
- Motore elettrico con protezione termica
- Regolazione pressione

General Features

- Trolley with handle and stainless steel cover
- Triplex pump with ceramic pistons
- Pump head in pressed brass
- Heavy-duty motor with thermal protection
- Pressure regulation valve

TK	 MAX	 MAX				 NET
150/30	150 bar	1800 l/h	1450rpm	400 V-50 Hz	10 HP	90 Kg
200/21	200 bar	1260 l/h	1450rpm	400 V-50 Hz	10 HP	90 Kg
250/15	250 bar	900 l/h	1450rpm	400 V-50 Hz	10 HP	90 Kg
250/21	250 bar	1260 l/h	1450rpm	400 V-50 Hz	12 HP	100 Kg
300/15	300 bar	900 l/h	1450rpm	400 V-50 Hz	12 HP	100 Kg

Dotazione di serie

- Tubo alta pressione 10 mt
- Pistola e lancia
- Ugello alta pressione

Standard equipment

- High pressure hose 10 mt
- Gun and Lance
- High Pressure Nozzle

Optional - On request



Ugello sturatubi
Pipe jet



Sabbiatore
Sandblaster



Doppia Lancia
Double lance



Ugello rotante
Rotary jet nozzle