Environment Friendly Low Noise

* Engine noise are half of 2-stroke engine.



SEH-25H



SEH-25L

Performance Curve

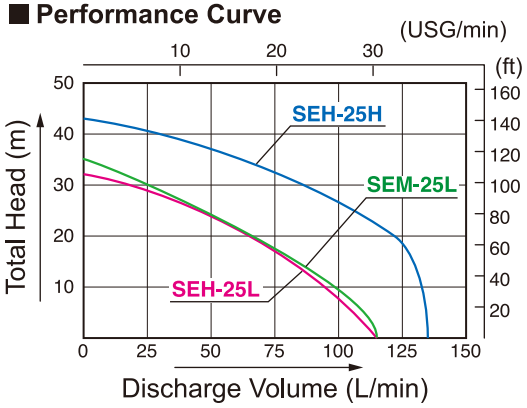

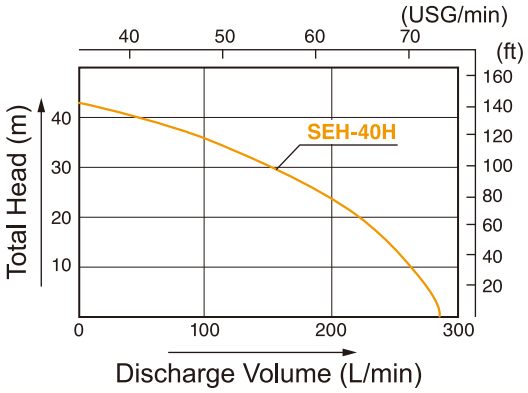



SEM-25L

Available 25 mm Hose Set

N-Type Hose Set

- Washing of agriculture & construction machinery



- 1 Discharge hose <8 m (26 ft)>
- 1 Nozzle (Jet)

R-Type Hose Set

- Washing of agriculture machinery
- Water sprinkling to the field



- 1 Discharge hose <8 m (26 ft)>
- 1 Nozzle (Jet & Mist)

New Spray Nozzle



SJ-20

- Large volume of spraying water
- 1 Coupling set <20 mm (¾")>
- 1 Hose nipple <20 mm (¾") × 15 mm (½")>



Specification

Model		SEH-25L	SEH-25H	SEH-40H	SEM-25L
PUMP	Connection Dia	25 mm (1")		40 mm (1½")	25 mm (1")
	Connection Thread	Outer Pipe Thread BSP or NPT			Outer Pipe Thread BSP
	Total Head	32 m (105 ft)	43 m (141 ft)		35 m (115 ft)
	Discharge Volume	115 L/min (30 USG/min)	135 L/min (36 USG/min)	280 L/min (73 USG/min)	115 L/min (30 USG/min)
	Max. Suction Lift	8 m (26 ft)			
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine			Forced Air-cooled 2-stroke Gasoline Engine
	Model	Honda GX25	Honda GXH50		MEiKi Power TUE26
	Displacement	25 cc	49.4 cc		25.6 cc
	Rated Output	——			
	Max. Output	0.72 kW (1.0 PS) / 7000 rpm	1.6 kW (2.2 PS) / 7000 rpm		1.03 kW (1.4 PS) / 7500 rpm
	Fuel	Automotive Unleaded Gasoline			2 Stroke Mixed Gas and Oil (50:1)
	Fuel Tank Capacity	0.53 L (0.14 USG)	0.77 L (0.20 USG)		0.6 L (0.16 USG)
	Continuous Operating Time	Approx. 1 hr		Approx. 2 hrs	Approx. 1 hr
	Starting Method	Recoil Starter			
Standard Accessories		1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set			
Net Weight		5.5 kg (12.1 lbs)	11.5 kg (25.4 lbs)		5.0 kg (11.0 lbs)
Gross Weight		7 kg (15.4 lbs)	13.5 kg (29.7 lbs)		6.5 kg (14.3 lbs)
Dimensions L×W×H (mm)		375 × 243 × 320	455 × 302 × 447		330 × 245 × 325
Packing Unit		1			

Complete Range of Water Pumps Powered by Honda Engine

Performance Curve

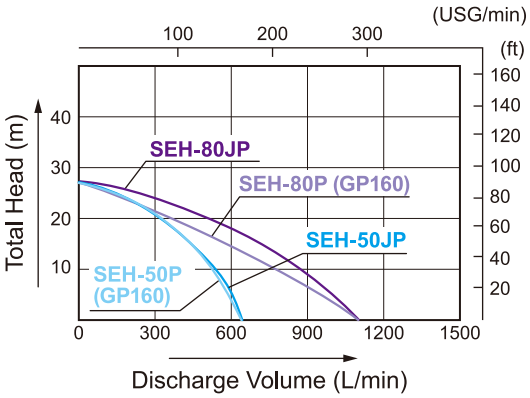

* Performance ratings are guaranteed minimum, not inflated maximum.



SEH-50JP



SEH-80P

Specification

	Model	SEH-50JP	SEH-80JP	SEH-50P	SEH-80P
PUMP	Connection Dia	50 mm (2")	80 mm (3")	50 mm (G2")	80 mm (G3")
	Connection Thread	Outer Pipe Thread BSP			
	Total Head	27 m (88 ft)			
	Discharge Volume	640 L/min (169 USG/min)	1100 L/min (290 USG/min)	640 L/min (169 USG/min)	1100 L/min (290 USG/min)
	Max. Suction Lift	8 m (26 ft)			
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine			
	Model	Honda GP160			
	Displacement	163 cc			
	Rated Output	2.9 kW (3.9 PS) / 3600 rpm			
	Max. Output	3.6 kW (4.9 PS) / 3600 rpm			
	Fuel	Automotive Unleaded Gasoline			
	Fuel Tank Capacity	3.1 L (0.8 USG)			
	Continuous Operating Time	Approx. 2.5 hrs	Approx. 2.2 hrs	Approx. 2.5 hrs	Approx. 2.2 hrs
	Starting Method	Recoil Starter			
Standard Accessories		1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set			
Net Weight		24 kg (52.9 lbs)	26.1 kg (57.5 lbs)	24.2 kg (53.3 lbs)	26.7 kg (58.8 lbs)
Gross Weight		26 kg (57.3 lbs)	28.8 kg (63.4 lbs)	26.2 kg (57.7 lbs)	29.5 kg (65.0 lbs)
Dimensions L×W×H (mm)		504 × 401 × 406	543 × 425 × 425	521 × 400 × 411	543 × 425 × 425
Packing Unit		1			

Complete Range of Water Pumps Powered by Honda Engine

■ Performance Curve

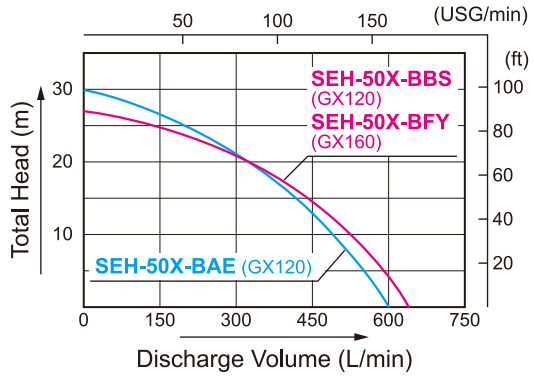

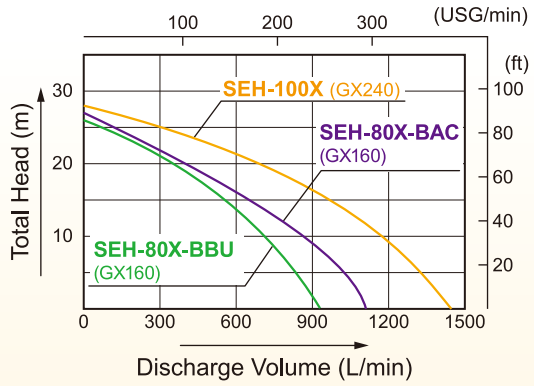



SEH-50X



SEH-80X

■ Specification

	Model	SEH-50X-BAE	SEH-50X-BBS	SEH-50X-BFY	SEH-80X-BBU	SEH-80X-BAC	SEH-100X
PUMP	Connection Dia	50 mm (2")			80 mm (3")		100 mm (4")
	Connection Thread	Outer Pipe Thread BSP or NPT					
	Total Head	30 m (98 ft)	27 m (88 ft)		26 m (85 ft)	27 m (88 ft)	28 m (92 ft)
	Discharge Volume	600 L/min (158 USG/min)	640 L/min (169 USG/min)		930 L/min (246 USG/min)	1100 L/min (290 USG/min)	1450 L/min (383 USG/min)
	Max. Suction Lift	8 m (26 ft)					
	Impeller	FC200					
	Volute Casing	ADC12	FC200		ADC12	FC200	
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine					
	Model	Honda GX120		Honda GX160			Honda GX240
	Displacement	122 cc		163 cc			270 cc
	Rated Output	2.1 kW (2.9 PS) / 3600 rpm		2.9 kW (3.9 PS) / 3600 rpm			4.6 kW (6.3 PS) / 3600 rpm
	Max. Output	2.4 kW (3.3 PS) / 3600 rpm		3.6 kW (4.9 PS) / 3600 rpm			5.9 kW (8.0 PS) / 3600 rpm
	Fuel	Automotive Unleaded Gasoline					
	Fuel Tank Capacity	2.0 L(0.53 USG)		3.1 L (0.82 USG)			5.3 L (1.4 USG)
	Continuous Operating Time	Approx. 2 hrs					Approx. 2.5 hrs
	Starting Method	Recoil Starter					
Standard Accessories		1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set					
Net Weight		21 kg (46.3 lbs)	21 kg (46.3 lbs)	25.2 kg (56.2 lbs)	25.9 kg (57.0 lbs)	28 kg (61.7 lbs)	54 kg (119 lbs)
Gross Weight		22 kg (48.5 lbs)	23 kg (50.7 lbs)	27.2 kg (59.9 lbs)	29 kg (63.9 lbs)	30 kg (66.0 lbs)	59 kg (130 lbs)
Dimensions L×W×H (mm)		483 × 375 × 376		504 × 401 × 406	543 × 425 × 425	525 × 389 × 463	680 × 490 × 675
Packing Unit		1					