
WALL-BOOM-EXTENSION

- ✓ **Smooth, comfortable operation**
- ✓ **Extended work radius**
- ✓ **Solid construction**

Whenever extended lengths and maximum flexibility are required, the wall-boom-extension is perfect for the job. Prime examples are truck wash bays, mining facilities, air craft maintenance and manufacturing plants. When combined correctly, a working radius of 12 meters is possible.






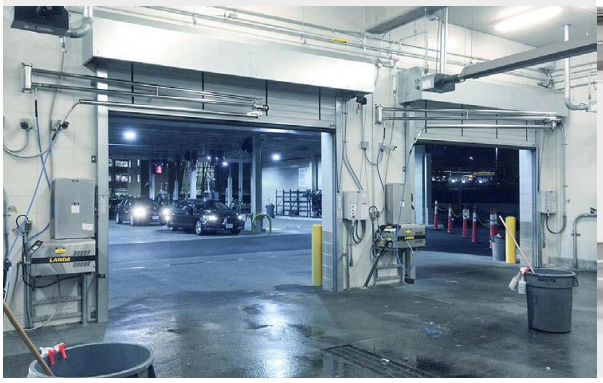

WSA (1 inner pipe = 1 inlet)

Part No.	B	L max.	Weight
60.522	2000	1900	24.0 kg
60.532	2500	2250	25.5 kg
60.542	3000	2750	28.6 kg
60.983	4500	3000	51.8 kg
60.930	6000	6000	57.8 kg


Add ceiling boom: DKP

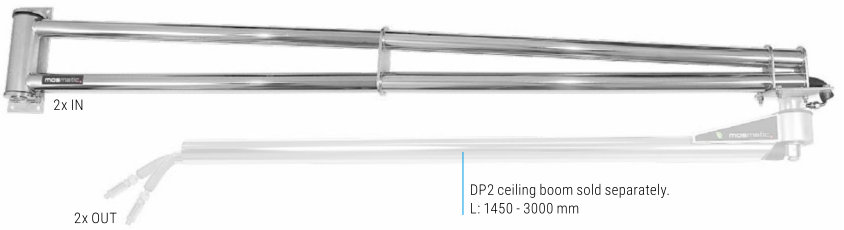



WSA-2R (2 inner pipes = 2 inlets)

Part No.	B	L max.	Weight
60.910	2000	1900	24.8 kg
60.911	2500	2250	27.3 kg
60.912	3000	2750	29.8 kg

Add ceiling boom: DP2

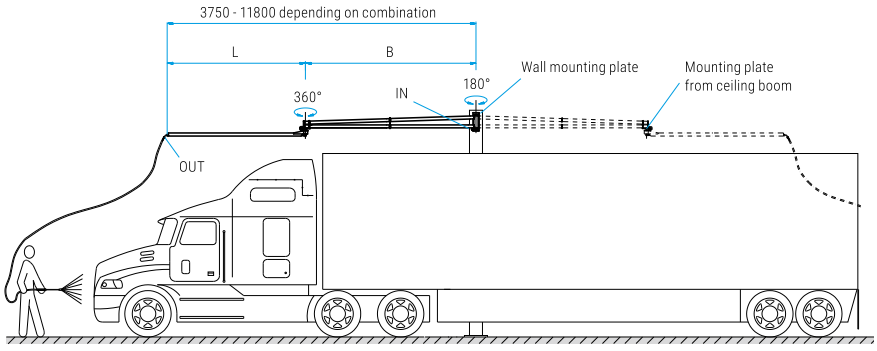

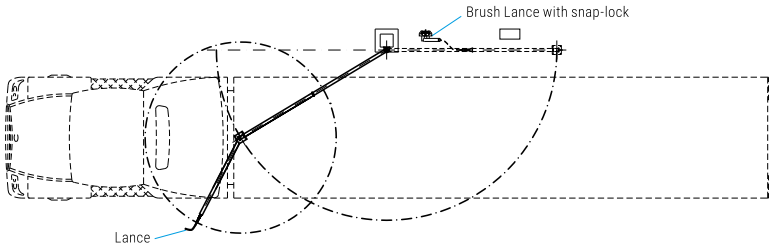

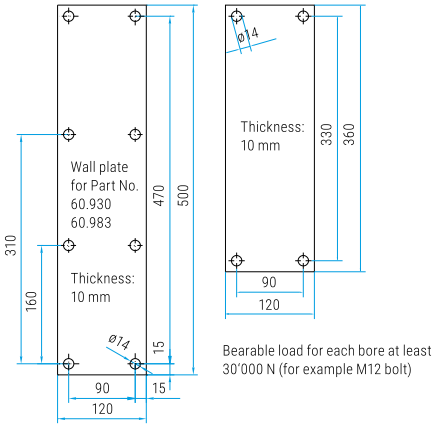

Bearable load for each bore at least 30'000 N (for example M12 bolt)

TECHNICAL DATA

Pressure	275 bar (27.5 MPa)
Temperature	120°C
Inlet (bottom)	G1/4" F (other options available)
Outlet	G1/4" M (other options available)
Throughput medium	water, oil, air at pH 3-12

Legend

M.. = metric thrust, **..M** = male, **F** = female, **G** = gas pipe thrust, **R** = gas pipe thrust conical, **QV** = quick connects, **SV** = profile ring fitting
D = diameter, **L** = length, **NW** = nominal width, **SW** = wrench size, **IN** = media input, **OUT** = media output, **RS** = basic position

WWW.MOSMATIC.COM