Strong & Durable Robin(CC) Engine

- Highly effective Mechanical Seal made with special Carbon Ceramics provides extra durability.
- Entire unit is protected by sturdy Rollover Pipe Frame.
- Strong and lightweight die-cast Aluminum Pump.





SE-80X

■ Performance Curve

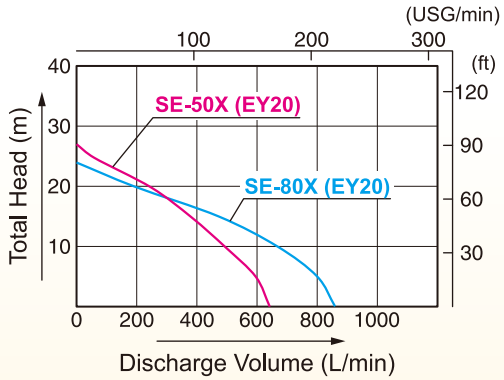



SE-50X

■ Specification

	Model	SE-50X	SE-80X
PUMP	Connection Dia	50 mm (2")	80 mm (3")
	Connection Thread	Outer Pipe Thread BSP	
	Total Head	27 m (88 ft)	24 m (78 ft)
	Discharge Volume	640 L/min (169 USG/min)	860 L/min (227 USG/min)
	Max.Suction Lift	8 m (26 ft)	
ENGINE	Type	Forced Air-Cooled 4-stroke Gasoline Engine	
	Model	Robin EY203D	
	Displacement	183 cc	
	Rated Output	2.6 kW (3.5PS) / 3600 rpm	
	Max. Output	3.7 kW (5.0PS) / 4000 rpm	
	Fuel	Automotive Unleaded Gasoline	
	Fuel Tank Capacity	3.8 L (1.0 USG)	
	Continuous Operating Time	Approx. 2.0 hrs (full tank)	Approx. 3.0 hrs (full tank)
	Starting Method	Recoil Starter	
Accessories		1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set	
Gross Weight		28.2 kg (61.7 lbs)	30.1 kg (66.3 lbs)
Dimensions L×W×H (mm)		525 × 370 × 472	
Packing Unit		1	