
# "PACO-PET" Plastic Syphon Pumps

## Applications

- Kerosene
- Gasoline
- Diesel oil
- Solvent
- Water (Non-potable)

## Specification


| Model | PH-10 | PH-20 |
|---|---|---|
| Discharge Volume | 6.7 L/min (1 USG/min) | 11.5 L/min (3 USG/min) |
| Pump Length | 517 mm (20") | 613 mm (24") |
| Suction Pipe | 385 mm | 410 mm |
| Delivery Hose | 545 mm | 572 mm |
| Gross Weight | 11.5 kg (25 lbs) (120 units) | 6.8 kg (15 lbs) (40 units) |
| Dimensions L×W×H (mm) | 680 × 330 × 603 | 800 × 355 × 350 |
| Packing Unit | 120 | 40 |

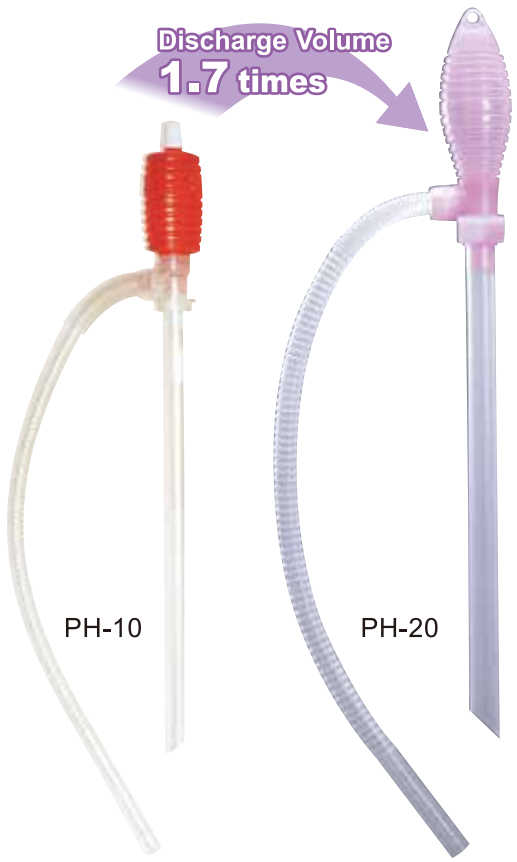



# Plastic Pumps Operated by Dry Cell Battery

## Applications

- Kerosene

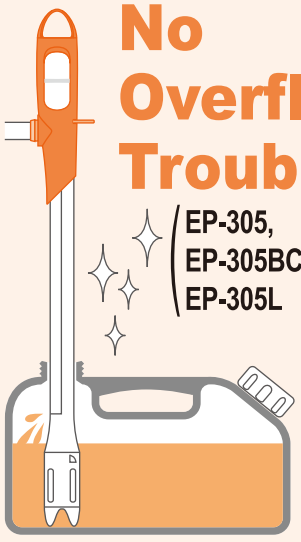

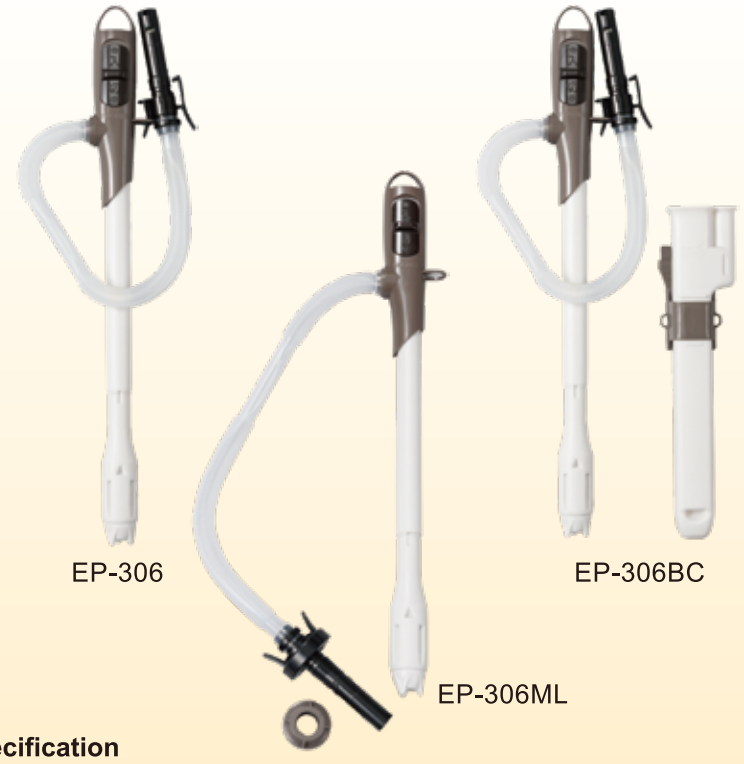
## Specification

| Model | EP-306 | EP-306ML | EP-306BC |
|---|---|---|---|
| Delivery Hose | 620 mm | | |
| Connection dia Suction | 20 mm | 19.5 mm | 20 mm |
| Connection dia Discharge | 35 mm | | |
| Discharge Volume | 12 L/min | | |
| Stop Sensor | ○ | ○ (buzzer) | ○ |
| Power | 2×1.5 V AA Batteries (Not Inclueded) | | |
| Gross Weight | 6.1 kg | 6.8 kg | 5.1 kg |
| Dimensions L×W×H (mm) | 300 × 290 × 585 | 305 × 315 × 585 | 290 × 280 × 615 |
| Packing Unit | 20 | 20 | 12 |

*EP-105 does not have auto stop function.