
ZETA 300

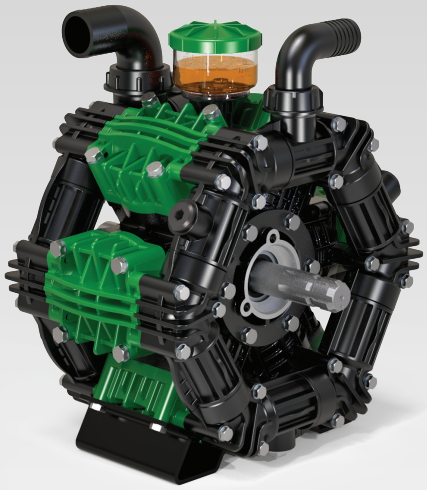


Scan this QR Code for more information


GREENTECH Diaphragms Standard. Buna-N Optional.

ZETA 300 low pressure 6-cylinder diaphragm pumps have anodized aluminum bodies with plasticized aluminum heads, stainless steel valves and glass-filled nylon manifolds.

ZETA 300 pumps are excellent for various horticultural and agricultural spraying applications.

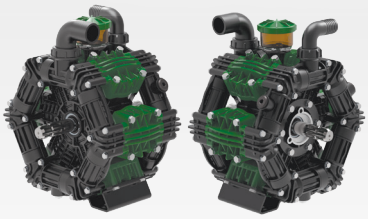


ZETA 300 TS2C



ZETA 300 MI1

Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
ZETA 300 TS2C	78.0	295.0	300	20	550	1-3/8" 6-Spline Male PTO Thru-Shaft	80 LBS
ZETA 300 MI1	78.0	295.0	300	20	550	2-Bolt, A-Flange, 1" Hollow Shaft for Hydraulic Motor	80 LBS

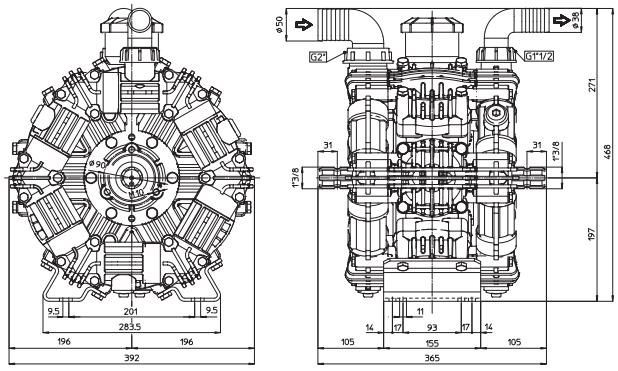

Dimensional Drawings are Shown in Millimeters. To Convert to Inches, Multiply Dimension x 0.03937

Specifications	ZETA 300
Inlet Port	2" Hose Barb
Outlet Port	1-1/2" Hose Barb
Piston Diameter	80.0mm
Crankshaft Stroke/Code	19.0mm / U
Dimensions	14.5"L x 15.5"W x 18.5"H

Lubrication: Requires 90 oz. of Udor Lube 40W Premium Pump Oil. Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

QUICK REFERENCE SERVICE PARTS

Description	Part #
Diaphragm Kit - GREENTECH	6062.H4
Diaphragm Bolt & Washer Kit	6062.D4
Valve Kit	6062.D3
Complete Repair Kit	8700.42CK

Recommended Accessories and Drive Options



OMP-100
HD Hydraulic Motor
2-Bolt A-Flange Mount



6066.09
Shaft Protector
and Mounting Bolts



6066.05
PTO Drive
Safety Shield



VRG-400
Pressure
Regulator



15.5823
Udor Lube
Premium Pump Oil