

SUN DR NPT WITH ELECTRIC ACTUATOR

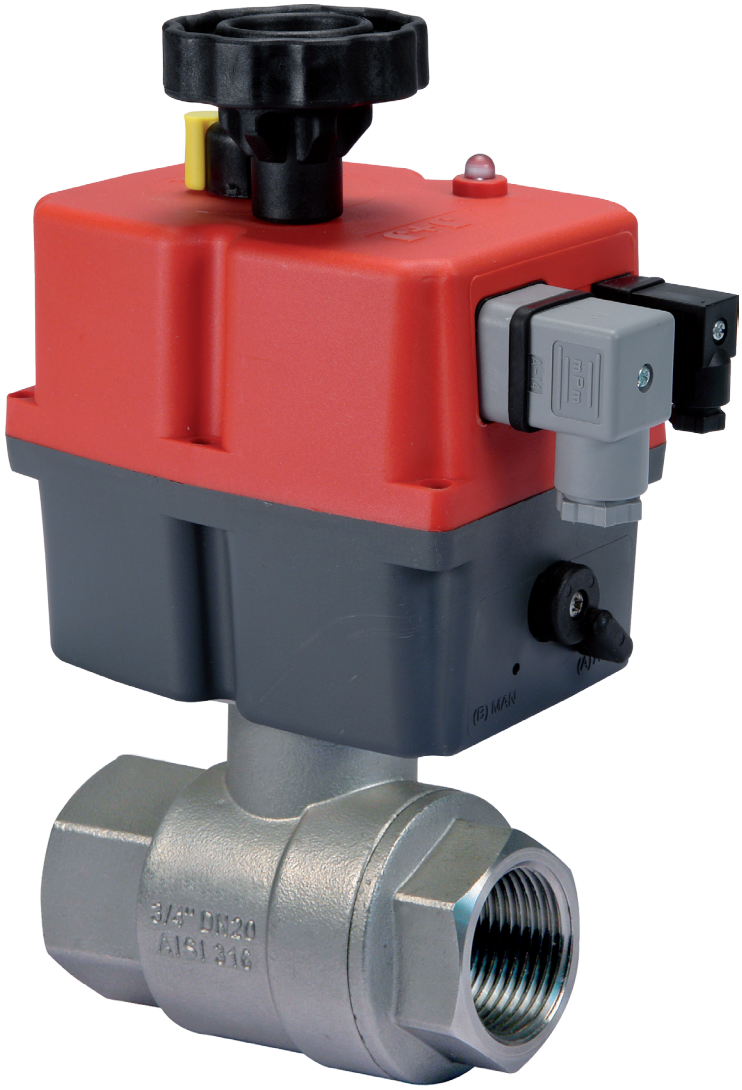

DIRECT MOUNTING
ISO 5211

E4C 24-240 V AC/DC

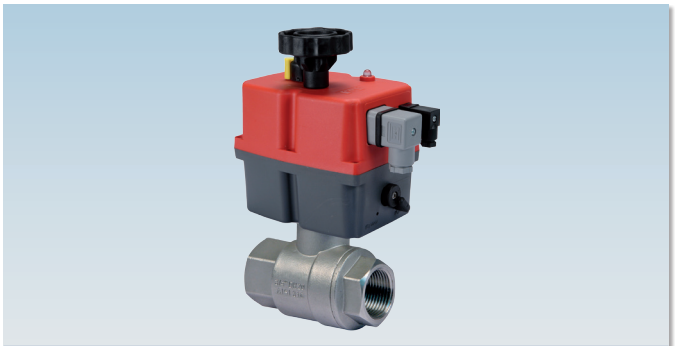

art. E33AA...	F/F from 1/2" to 2"

EFFEBI®

EFFEBI U.S. - 30 Chapin Rd, Suite 1205 - PINE BROOK, NJ 07058
Tel. +1 973-287-7584 - E-mail: effebi.us@effebi.com
Internet: www.effebi.com

ICIM UNI EN ISO 9001: 2015
ICIM ISO 14001:2015

SUN DR NPT
WITH ELECTRIC ACTUATOR

E4C ACTUATOR FEATURES:
- **ROTATION ANGLE:** 90°.
- **TEMPERATURE LIMITS:** -4°F / +158°F.
- **SUPPLY VOLTAGE:** 24-240 VAC - DC 50 / 60 HZ.
- **PROTECTION DEGREE:** IP67.
- **STATIC TORQUE SUPPLIED:** 177 Lbf/inch. - 3097 Lbf/inch.
- **ROTATION TIME:** 10 s. - 48 s.
- **On Request is Available 12 V AC-DC 50 / 60 HZ**


STANDARD VALVE FEATURES:
- **TEMPERATURE LIMITS:** -4°F / +302°F (PTFE).
- **MAXIMUM WORKING PRESSURE:** Please refer to manual valve.
- **CONNECTIONS:** F/F NPT ANSI B1.20.1
- **MOUNTING BASE:** ISO 5211.

For general features and special versions refer to data on the manual valve. For further information on the actuator technical features refer to the specific data sheet for actuator at the end of this catalogue.
E4C • ER-E EQ

On request:
- EQ actuator is available for valves of all dimensions in Vac Vdc tension.

SUN DR + E4C ELECTRIC ACTUATOR							
SIZE inch.	WEIGHT Lbf	A	B	C	E	E4C ACTUATOR	KIT FOR ACTUATOR
1/2"	4.7	7.11	4.32	6.64	8.05	020	KANXOX12
3/4"	4.9	7.11	4.32	6.64	8.21	020	KANXOX12
1"	5.5	7.11	4.32	6.64	8.36	020	KANXOX12
1" 1/4	6.5	7.11	4.32	6.64	8.72	020	KANXOX02
1" 1/2	8	7.11	4.32	6.64	8.97	035	KANXOX02
2"	11.9	7.11	4.32	7.70	10.68	055	KANXOX08

SECTION

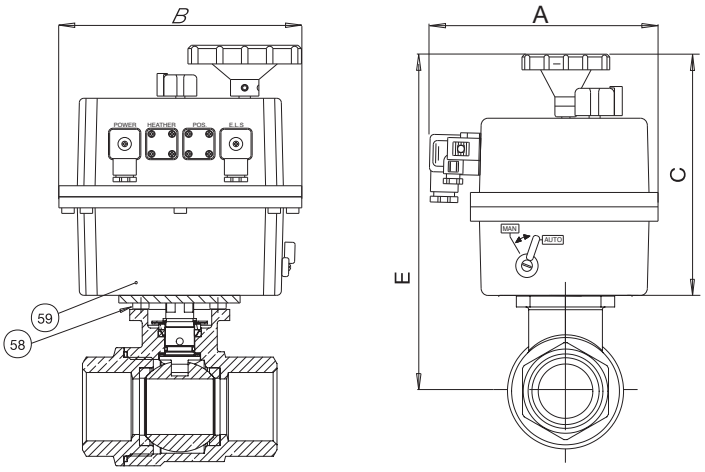

LIST OF COMPONENTS AND MATERIALS			
58	ACTUATOR SCREW	4	8.8 ZINC.
59	ACTUATOR	1	POLYAMIDE