SUN WP / SUNNY WP NPT WITH ELECTRIC ACTUATOR



FUGITIVE EMISSIONS
TEST CERTIFICATE
UNI EN ISO 15848-1:2017

E4C 24-240 V AC/DC SUN WP



art. E31AA...	F/F from 3/8" to 2"

E4C 24-240 V AC/DC SUNNY WP



art. E32AA...	F/F from 3/8" to 2"

EFFEBI U.S. - 30 Chapin Rd, Suite 1205 - PINE BROOK, NJ 07058
Tel. +1 973-287-7584 - E-mail: effebi.us@effebi.com
Internet: www.effebi.com

UNI EN ISO 9001: 2015
ISO 14001:2015

SUN WP
SUNNY WP NPT
WITH ELECTRIC ACTUATOR

E4C ACTUATOR FEATURES:
- **ROTATION ANGLE:** 90°.
- **TEMPERATURE LIMITS:** -4°F / +158°F.
- **SUPPLY VOLTAGE:** 24-240 VAC - DC 50 / 60 HZ.
- **PROTECTION DEGREE:** IP67.
- **STATIC TORQUE SUPPLIED:** 177 Lbf/inch. - 3097 Lbf/inch.
- **ROTATION TIME:** 10 s. - 48 s.
- **On Request is Available 12 V AC-DC 50 / 60 HZ**

STANDARD VALVE FEATURES:
- **TEMPERATURE LIMITS:** -4°F / +302°F (PTFE).
- **MAXIMUM WORKING PRESSURE:** 1450 psi - 580 psi
- **CONNECTIONS:** F/F NPT ANSI B1.20.1
- **MOUNTING BASE:** ISO 5211.


For general features and special versions refer to data on the manual valve. For further information on the actuator technical features refer to the specific data sheet for actuator at the end of this catalogue.
E4C • ER-E EQ

On request:
- EQ actuator is available for valves of all dimensions in Vac Vdc tension.

SUN WP/SUNNY WP + E4C ELECTRIC ACTUATOR

SIZE inch.	WEIGHT Lbf	A	B	C	E	E4C ACTUATOR	KIT FOR ACTUATOR
3/8"	4.4	0.40	0.24	0.37	0.50	20	K1GA0003
1/2"	4.8	0.40	0.24	0.37	0.51	20	K1GA0003
3/4"	5.2	0.40	0.24	0.37	0.52	20	K1GA0105
1"	6.1	0.40	0.24	0.37	0.54	20	K1GA0105
1" 1/4	7.5	0.40	0.24	0.37	0.57	20	K1GA0207
1" 1/2	8.8	0.40	0.24	0.37	0.59	35	K1GA0207
2"	13	0.40	0.24	0.43	0.69	55	K1GA0009

SECTION

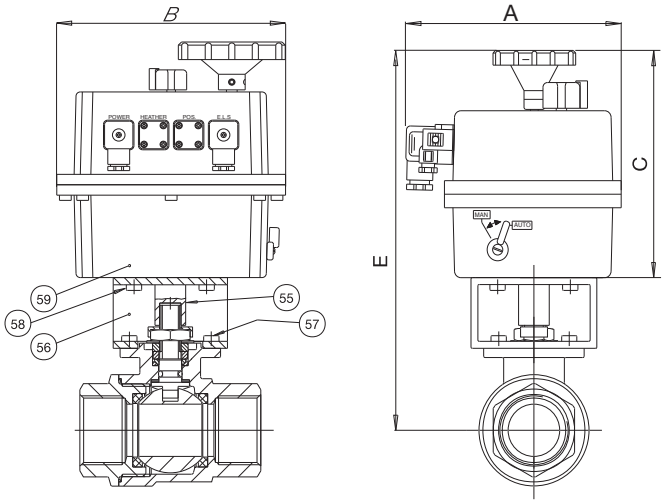

LIST OF COMPONENTS AND MATERIALS

55	ACTUATOR PIN	1	C.S. ZINC.
56	BRACKET	1	C.S. ZINC.
57	BRACKET/VALVE SCREW	4	8.8 ZINC.
58	BRACKET/ACTUATOR SCREW	4	8.8 ZINC.
59	ACTUATOR	1	POLYAMIDE