Hannay Reels®
The reel leader.

Reel Product News

Hannay Offers Industrial Vacuum Reel Options

Four new series of industrial strength reels are now available. The VAC4000, VAC900, VACN900 & VAC2900 are designed specifically for shop vacuum applications, car detailing operations and dust/debris collection.


***NOTE:* These reels are NOT for solid or liquid suction. Please refer to our Pumper Cleaner catalog for vacuum reel options with solid or liquid applications.**



VAC4000 Series
Standard configuration shown (hose not included).

VAC4000 Standard Features:

- To handle 1-1/2" ID industrial vacuum hose.
- Internal hub connection to fit hose cuff.
- Includes permanently attached crank handle and cam-lock drag brake.
- Rollformed channel frame for heavy duty applications.

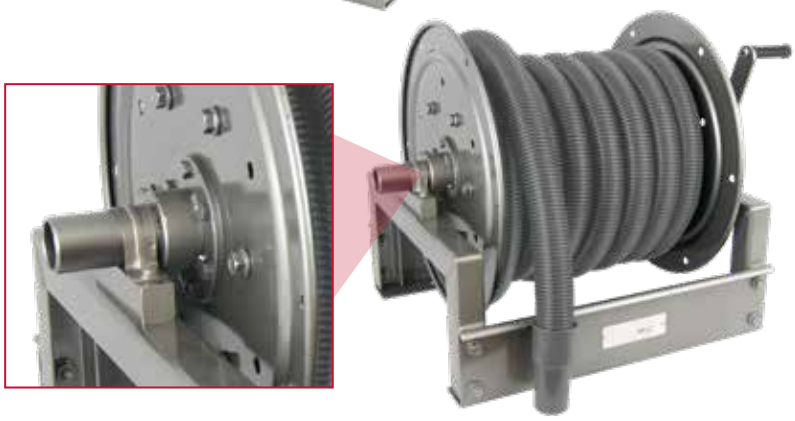

***NOTE: VAC4000 Series** standard inlet/outlet is a slip fit connection (not threaded) for 1 1/2" hose.*


Model Number	Hose Capacity of Reel feet m		Approx. Weight lb. kg			Reel Dimensions*** in. mm									
	I.D. in. mm	1-1/2 38	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.	A	B	C	D	E	F	G	H	X	Y
	O.D. in. mm	1.84 47													
VAC4020-17-18-8		**25**	**38**	**82**	**73**	**17**	**12**	**8**	**18**	**16.50**	**24.88**	**18.13**	**9.88**	**9.50**	**14.25**
		8	17	37	33	431	305	203	457	419	632	460	251	241	362
VAC4024-17-18-8		**35**	**42**	**94**	**77**	**21**	**16**	**8**	**18**	**16.50**	**28.88**	**18.13**	**9.88**	**13.50**	**14.25**
		11	19	43	35	533	406	203	457	419	734	460	251	343	362
VAC4028-17-18-8		**50**	**46**	**98**	**81**	**25**	**20**	**8**	**18**	**16.50**	**32.88**	**18.13**	**9.88**	**17.50**	**14.25**
		15	21	45	37	635	508	203	457	419	835	460	251	445	362

Notes:

1. Specifications subject to change.
2. Upon request, reels can be supplied with drum lengths other than shown.
3. Dimension "F" is the overall length of standard model reels.
4. **Be sure to check dimensions and weights prior to ordering.**

* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

*** X, Y indicate mounting holes. (Also applies for external mounting brackets.)

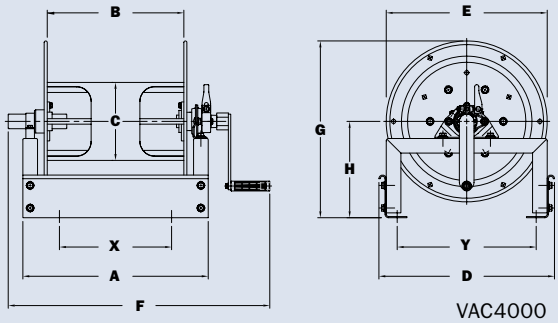

VAC4000

See reverse for additional reel models.

Email: **reels@hannay.com**
hannay.com
Toll Free: **877-467-3357**
Phone: **518-797-3791**
FAX: **518-797-3259**

MADE IN USA

Hannay Reels®
The reel leader.

Reel Product News

VACN900 Standard Features:

- To handle 1-1/2" ID industrial vacuum hose.
- N-series has a narrow frame and compact mounting base, allows for different mounting options: floor, ceiling or wall.
- Non-sparking ratchet assembly locks hose at different payout lengths and 4-way roller assembly to guide hose.

VAC900/VAC2900 Standard Features:


- VAC900: to handle 1-1/2" ID vacuum hose.
  VAC2900: to handle 2" ID vacuum hose.
- Roll-formed channel frame for heavy-duty applications, allows different mounting options: floor, ceiling or wall.
- Non-sparking ratchet assembly locks hose at different payout lengths and 4-way roller assembly to guide hose.

NOTE: ***These reels are NOT for solid or liquid suction. Please refer to our Pumper Cleaner catalog for vacuum reel options with solid or liquid applications.***

VACN900 Series ▼
Standard SR configuration shown
(hose not included)



VAC900 Series ▼
Optional TR configuration shown
(hose not included)

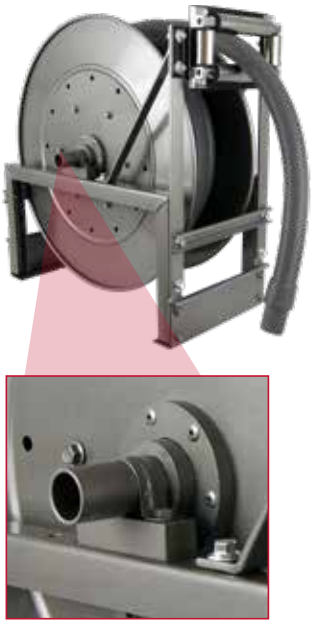


NOTE:


VACN900 & VAC900 *standard inlet/outlet is a slip fit connection (not threaded) for 1 1/2" hose.*

VAC2900 *standard inlet/outlet is a slip fit connection (not threaded) for 2" hose.*

Model Number	Hose Capacity of Reel feet m		Approx. Weight lb. kg		Standard Roller Assy.	Reel Dimensions*** in. mm								
	I.D. in. mm	1-1/2 38	2 51	NET	SHIP		A	B	D	E	F	G	H	X	Y
	O.D. in. mm	1.84 47	2.34 59												
VACN918-23-24-10.5L		25 8	– –	60 27	95 43	N306	12 305	6 152	12 305	24 610	13.25 337	24 610	12.63 320	10 254	10 254
VACN920-23-24-10.5L		35 11	– –	62 28	97 44	N308	14 356	8 203	12 305	24 610	15.25 387	24 610	12.63 320	12 305	10 254
VAC920-28-29-10.5J		50 15	– –	76 34	111 50	R308	13.25 337	8 203	28.5 724	26.75 679	16.5 419	28.25 718	14.88 378	8.5 216	23.25 591
VAC2920-28-29-10.5J		– –	25 8	77 35	112 51	R2308	13.25 337	8 203	28.5 724	26.75 679	16.75 425	28.25 718	14.88 378	8.5 216	23.25 591
VAC2922-28-29-10.5J		– –	35 11	79 36	113 51	R2310	15.25 387	10 254	28.5 724	26.75 679	18.75 476	28.25 718	14.88 378	10.5 267	23.25 591
VAC2920-33-34-10.5J		– –	50 15	92 42	127 58	R2308	13.25 337	8 203	33 838	31.75 806	16.75 425	33.63 854	17.75 451	8.5 216	27.75 705

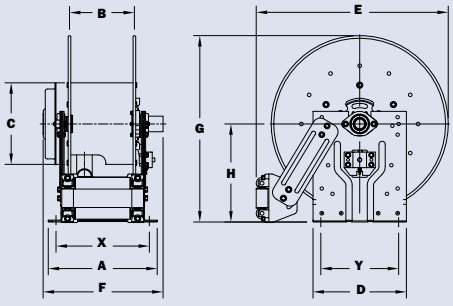


VACN900

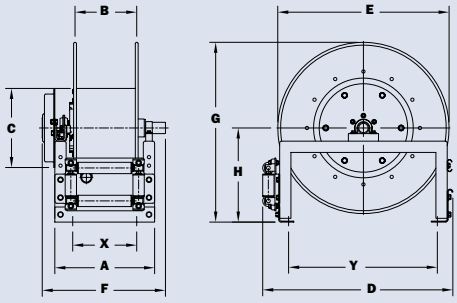

VAC900/VAC2900

Available Roller Positions



SR (STD) **VR** (OPT) **TR** (OPT) **TR** (Wallmount)

Notes: A hose stop is necessary to keep spring from unwinding.
1. Specifications subject to change.
2. Reel models shown are for standard drag applications; for vertical lift applications, consult factory.
3. **Be sure to check dimensions and weights prior to ordering.**

*** X, Y indicate mounting holes.

Email: **reels@hannay.com**
hannay.com
Toll Free: **877-467-3357**
Phone: **518-797-3791**
FAX: **518-797-3259**

Form H-1902-VAC REV 11-25 MADE IN USA