
JETWAVE® HIGH PRESSURE CLEANERS

# CADET™ G2 200-15

INDUSTRIAL
CONTINUOUS USAGE

| 3000 | 15 | ELECTRIC MOTOR 5.5KW 3 PHASE | DIRECT SOFT COUPLING 1450RPM | COLD WATER |
|---|---|---|---|---|
| PSI | L/PM | ENGINE TYPE | DRIVE | OUTPUT |

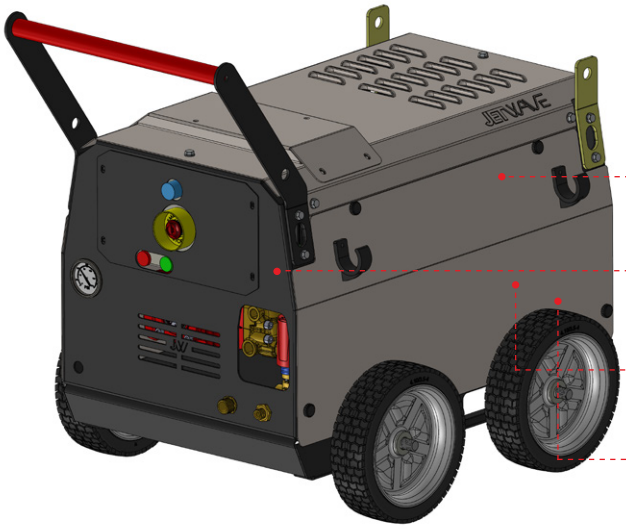

## HERO INNOVATIONS

**PEXO™**
Stainless Steel Exoskeleton

**JWPP™**
Jetwave Italian Premium Pump


**DTS™**
Delayed Timer Stop

**BCT™**
Bypass Cooling/Water Buffer Tank

MADE IN AUSTRALIA

## APPLICATIONS

- Agriculturist
- Food & Beverage Cleaning
- Transportation & Logistics
- Factory Cleaning

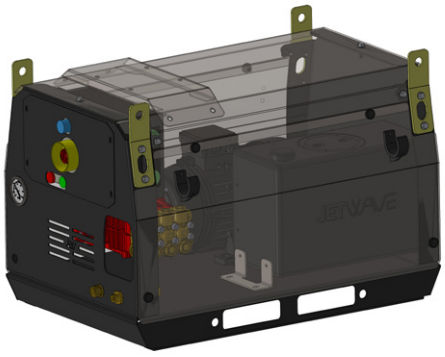

## STANDOUT FEATURES

**JW® Enhanced** Italian triplex plunger pump running at 1450RPM delivers more performance and longer life.

**Maintenance free low speed**, electric motor, air cooled and protected with thermal cut-out.

**Jetwave Safety System™** (JSS) safety valve to prevent over pressurisation.

Seamless & sealed **12L on-board bypass water cooling tank** for added pump protection.

Quality assured **low 24v** electrical control box & **emergency stop** or increased safety.

**DTS™ Delayed Timer Stop** electronic control for overall unit protection.

## STANDARD EQUIPMENT




**Gun:** J5500k low trigger force gun w/swivel & lance coupling system.


**Lance:** JW Straight stainless steel lance w/ snap coupling + nozzle w/protector & tail



**Hose:** 10m non marking double wire braid hose w/M22 couplings

## DIMENSIONS




## TECHNICAL DATA 0:00

CADET™ G2 200-15

| | |
|---|---|
| Product Code | CW3000-15ELG2 |
| Pressure / Flow Rate | **3000 PSI** (200 BAR) / **15 L/PM** (900 L/PH) / **4 GPM** |
| Max Water Inlet Temp | 50°C / 122°F |
| Class (ASNZS: 4223) | Class A (4,200 Bar/Litres) |
| Usage Frequency | Industrial: Continuous |
| Nozzle Size | 045 |
| Frame Structure | CNC Modular galvanised steel chassis plus satin powder coat finish and **stainless steel cover** |

## MOTOR FEATURES

| | |
|---|---|
| Motor / Power | Induction / 5.5kW / 3 Phase / 415v / 50Hz / 32A |
| Cable Length / Control | **8M** / Delayed Timer Stop DTS™ |

## HYDRAULIC FEATURES

| | |
|---|---|
| Pump / Head / Pistons | **JW® Italian** Triplex Plunger / Brass / Ceramic |
| Motor Pump Coupling / Pump RPM | Soft Coupling Drive / 1450RPM |
| Unloader Valve | Independent - Adjustable |
| Safety Valve | Yes |

## DIMENSIONS & WEIGHT

| | |
|---|---|
| Machine Dimensions / Weight | 770mm(L) x 665mm(W) x 880mm(H) / 140KG (approx.) |

## WARRANTY(S)

| | |
|---|---|
| Unit / Pump Warranty* | 2 Years |
| Motor Warranty* | 2 Years |

## OPTIONAL ACCESSORIES

| | |
|---|---|
| 30m Hose Reel w/30m hose | 1060CMPL-HYG2 |
| JW Pro Turbo Head | JWA303. |
| JW Bypass Pro Foam | PROFOAM |

**Copyright © 2024 Jetwave® Group Pty Ltd. All Rights Reserved.**

The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

*V4.0 07/24*