
CADET™ G2 200-21

INDUSTRIAL
CONTINUOUS USAGE

3000	21	ELECTRIC MOTOR 7.5KW 3 PHASE	DIRECT SOFT COUPLING 1450RPM	COLD WATER
PSI	L/PM	ENGINE TYPE	DRIVE	OUTPUT

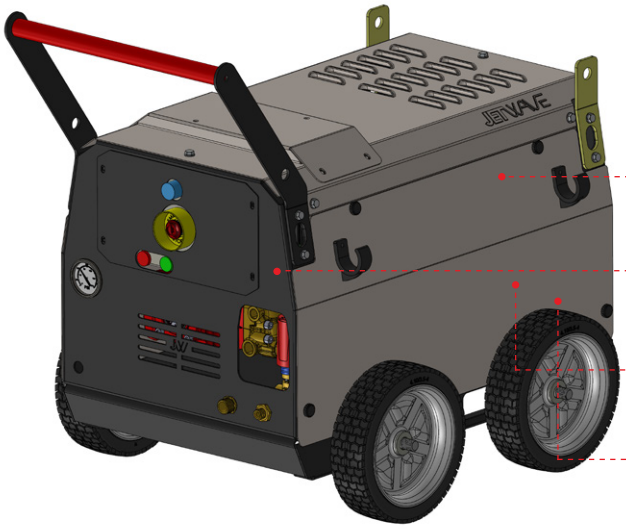

HERO INNOVATIONS

PEXO™
Stainless Steel Exoskeleton

JWPP™
Jetwave Italian Premium Pump


DTS™
Delayed Timer Stop

BCT™
Bypass Cooling/Water Buffer Tank

MADE IN AUSTRALIA

APPLICATIONS

- Agriculturist
- Food & Beverage Cleaning
- Transportation & Logistics
- Factory Cleaning

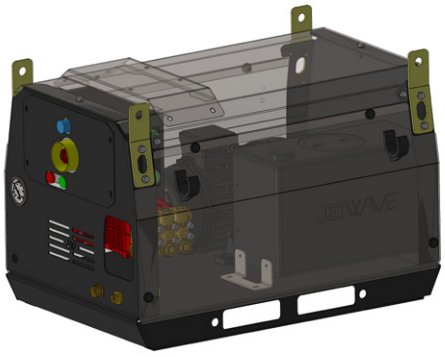

STANDOUT FEATURES

- **JW® Enhanced** Italian triplex plunger pump running at 1450RPM delivers more performance and longer life.
- **Maintenance free low speed**, electric motor, air cooled and protected with thermal cut-out.
- **Jetwave Safety System™** (JSS) safety valve to prevent over pressurisation.
- Seamless & sealed **12L on-board bypass water cooling tank** for added pump protection.
- Quality assured **low 24v** electrical control box & **emergency stop** or increased safety.
- **DTS™ Delayed Timer Stop** electronic control for overall unit protection.

STANDARD EQUIPMENT




Gun: J5500k low trigger force gun w/swivel & lance coupling system.


Lance: JW Straight stainless steel lance w/ snap coupling + nozzle w/protector & tail



Hose: 10m non marking double wire braid hose w/M22 couplings

DIMENSIONS





TECHNICAL DATA 0:00

CADET™ G2 200-21

Product Code	CW3000-21ELG2
Pressure / Flow Rate	**3000 PSI** (200 BAR) / **21 L/PM** (1260 L/PH) / **5.5 GPM**
Max Water Inlet Temp	50°C / 122°F
Class (ASNZS: 4223)	Class A (4,200 Bar/Litres)
Usage Frequency	Industrial: Continuous
Nozzle Size	065
Frame Structure	CNC Modular galvanised steel chassis plus satin powder coat finish and **stainless steel cover**

MOTOR FEATURES

Motor / Power	Induction / 7.5kW / 3 Phase / 415v / 50Hz / 32A
Cable Length / Control	**8M** / Delayed Timer Stop DTS™

HYDRAULIC FEATURES

Pump / Head / Pistons	**JW® Italian** Triplex Plunger / Brass / Ceramic
Motor Pump Coupling / Pump RPM	Soft Coupling Drive / 1450RPM
Unloader Valve	Independent - Adjustable
Safety Valve	Yes

DIMENSIONS & WEIGHT

Machine Dimensions / Weight	770mm(L) x 665mm(W) x 880mm(H) / 140KG (approx.)

WARRANTY(S)

Unit / Pump Warranty*	2 Years
Motor Warranty*	2 Years

OPTIONAL ACCESSORIES

30m Hose Reel w/30m hose	1060CMPL-HYG2
JW Pro Turbo Head	JWA303.065
JW Bypass Pro Foam	PROFOAM

Copyright © 2024 Jetwave® Group Pty Ltd. All Rights Reserved.

The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V4.0 07/24