
CADET™ G2 200-30

INDUSTRIAL
CONTINUOUS USAGE

3000	30	ELECTRIC MOTOR 11KW 3 PHASE	DIRECT SOFT COUPLING 1450RPM	COLD WATER
PSI	L/PM	MOTOR TYPE	DRIVE	OUTPUT

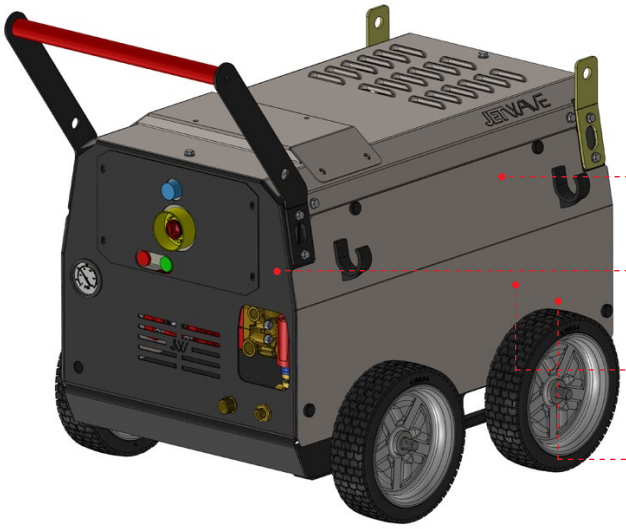

HERO INNOVATIONS

PEXO™
Stainless Steel Exoskeleton

JWPP™
Jetwave Italian Premium Pump

DTS™
Delayed Timer Stop

BCT™
Bypass Cooling/Water Buffer Tank

MADE IN AUSTRALIA

APPLICATIONS

- Agriculturist
- Food & Beverage Cleaning
- Transportation & Logistics
- Factory Cleaning

Skid



Trolley Kit




Wall Mount



Optional Hose Reel

Floor Mount



Optional Hose Reel

STANDOUT FEATURES

JW® Enhanced Italian triplex plunger pump running at 1450RPM delivers more performance and longer life.

Maintenance free low speed, electric motor, air cooled and protected with thermal cut-out.

Jetwave Safety System™ (JSS) safety valve to prevent over pressurisation.

Seamless & sealed **12L on-board bypass water cooling tank** for added pump protection.

Quality assured **low 24v** electrical control box & **emergency stop** or increased safety.

DTS™ Delayed Timer Stop electronic control for overall unit protection.

STANDARD EQUIPMENT




Gun: J5500k low trigger force gun w/swivel & lance coupling system.


Lance: JW Straight stainless steel lance w/ snap coupling + nozzle w/protector & tail



Hose: 10m non marking double wire braid hose w/M22 couplings

DIMENSIONS





TECHNICAL DATA 0:00

CADET™ G2 200-30

Product Code	CW3000-30ELG2
Pressure / Flow Rate	**3000 PSI** (200 BAR) / **30 L/PM** (1800 L/PH) / **8 GPM**
Max Water Inlet Temp	50°C / 122°F
Class (ASNZS: 4223)	Class B (6,000 Bar/Litres)
Usage Frequency	Industrial: Continuous
Nozzle Size	09
Frame Structure	CNC Modular galvanised steel chassis plus satin powder coat finish and **stainless steel cover**

MOTOR FEATURES

Motor / Power	Induction / 11kW / 3 Phase / 415v / 50Hz / 32A
Cable Length / Control	**8M** / Delayed Timer Stop DTS™

HYDRAULIC FEATURES

Pump / Head / Pistons	**JW® Italian** Triplex Plunger / Brass / Ceramic
Motor Pump Coupling / Pump RPM	Soft Coupling Drive / 1450RPM
Unloader Valve	Independent - Adjustable
Safety Valve	Yes
Detergent Injector	Yes - Downstream low pressure (power boost)

DIMENSIONS & WEIGHT

Machine Dimensions / Weight	770mm(L) x 665mm(W) x 880mm(H) / 150KG (approx.)

WARRANTY(S)

Unit / Pump Warranty*	2 Years
Motor Warranty*	2 Years

OPTIONAL ACCESSORIES

30m Hose Reel w/30m hose	1060CMPL-CG2
Turbo Head w/Lance (300BAR)	JWA160
JW Bypass Pro Foam	PROFOAM

OPTIONAL UPGRADES

High Temp Upgrade	ADD: HT

Copyright © 2024 Jetwave® Group Pty Ltd. All Rights Reserved.

The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.
*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V4.0 07/24