HYNOX™ 200-15

PROFESSIONAL
DAILY USAGE

3000	15	ELECTRIC MOTOR 5.5KW 3 PHASE	DIRECT 1450RPM	HOT WATER
PSI	L/PM	MOTOR TYPE	DRIVE	OUTPUT



HERO INNOVATIONS

SSC™
Stainless Steel Cover


TSI™
Intelligent Total Stop

CLASS A AS/NZS 4233.1
PRESSURE CLEANER
NO RTO CERTIFICATION REQUIRED FOR OPERATORS

APPLICATIONS

- Food & Beverage Cleaning
- Wineries & Barrel Cleaning
- Agriculturist
- Heavy Vehicle Cleaning



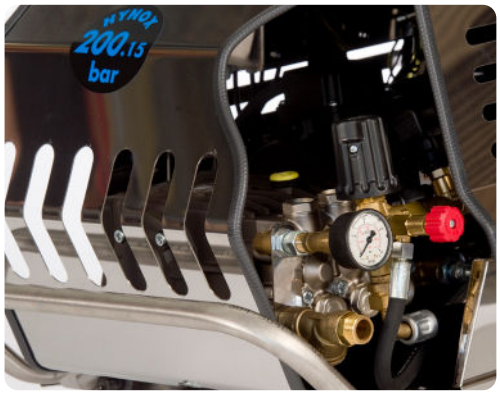

STANDOUT FEATURES

Interpump® Italian triplex plunger pump running at 1450RPM delivers more performance and longer life.

Brass adjustable unloader valve, for user flexibility.

Maintenance free low speed, electric motor, air cooled.

TSI safety features: Timed total stop, Shutdown for minor leaks, Shutdown after 1 hour of total stop, Shutdown for water supply failure, Flashing light error signalling.

Jetwave Safety System™ (JSS) thermal and safety valve to prevent overheating in excessive bypass and over pressurisation.

Vertical 90% fuel efficient environmentally friendly V3 diesel fired hot water burner system.

STANDARD EQUIPMENT



J5000™ High Pressure Gun + Twin Lance with Nozzles.



10m Double Wire Braid Hose with M22 Couplings.



TECHNICAL DATA 0:00

HYNOX™ 200-15

Product Code	10250C
Pressure / Flow Rate	**3000 PSI (200 BAR) / 15 L/PM**
Max Water Inlet / Outlet Temp	60°C / 90°C
Class (ASNZS: 4223)	A (3,000 Bar/Litres)
Usage Frequency	Daily - 4 Hours Daily
Nozzle Size	05
Frame Structure	Heavy gauge stainless steel with stainless steel cover

MOTOR FEATURES

Motor / Power	Induction / 5.5kW / 3 Phase / 415v / 50Hz
Cable Length / Control	**5M** / Intelligent Total Stop TSI™

HYDRAULIC FEATURES

Pump / Head / Pistons	**Interpump® Italian** Triplex Plunger / Brass (nickel plated) / Ceramic
Motor Pump Coupling / Pump RPM	Direct / 1450RPM
Unloader Valve	Integral - Adjustable
Safety Valve	Yes
Detergent Injector	Yes - Downstream low pressure (power boost)

THERMAL FEATURES

Burner Model	Vertical V1
Fuel Supply / Capacity / Consumption	Diesel / 24L / 5.74 L/PH
Coil / Housing Material	Mild steel 3mm wall seamless (400BAR rated) / Stainless Steel

DIMENSIONS & WEIGHT

Machine Dimensions / Weight	Trolley: 1000mm(L) x 610mm(W) x 830mm(H) / 160KG

WARRANTY(S)

Unit / Pump Warranty*	2 Year(s)
Motor Warranty*	2 Year(s)
Heating Coil Warranty*	2 Year(s)

OPTIONAL ACCESSORIES

30m Hose Reel (REQUIRES MOUNTING BRACKET)	1060CMPL
Hose Reel Mounting Bracket	90030HRP
Additional High Pressure Hose	52001
JW3 Foaming Lance w/1L Tank	JWA221
JW Bypass Profoam	PROFOAM
Turbo Head w/Lance (300BAR)	JWA160
21" Hammerhead - ABS Plastic	JWA-FSC21
21" Hammerhead - Stainless Steel	JWA-FSC21-5

The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.
*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V2.2 08/21