JETWAVE® HIGH PRESSURE CLEANERS

# SENATOR™ G2 280-21

PROFESSIONAL
DAILY USAGE

| 4060 | 21 | HONDA GX690 | GEARBOX | COLD WATER |
|---|---|---|---|---|
| 280 BAR | | PETROL | 1450RPM | |
| PSI | L/PM | ENGINE TYPE | DRIVE | OUTPUT |
| | | POWERED by HONDA | | |




Optional - Trolley Kit

## HERO INNOVATIONS

**PEXO™**
Stainless Steel Exoskeleton

**JWPP™**
Jetwave Italian Premium Pump

**CC™**
Centralised Control

**AVPS™**
Anti Vibration Protection System

**MC™**
Multi Configuration

LEARN MORE


Senator G2 Video

Registered Design ® 202215872

## APPLICATIONS

- Tradesmen
- Commercial Cleaners
- Shipping & Logistics
- Construction



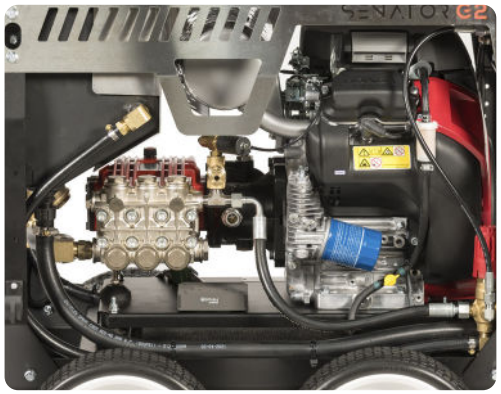


## STANDOUT FEATURES

**JW® UDOR® Premium** Italian plunger pump running at 1450RPM, delivers more performance and longer life.

Electric start industrial **V-Twin Honda™ GX690** series engine with digital engine hour meter.

**Jetwave Safety System™** (JSS) safety valve to prevent over pressurisation.

Seamless & sealed **40L on-board oversized water bypass tank** w/low level cut out, for unit water supply and pump protection in bypass.

**Battery isolator & emergency stop** for increased safety and longevity.

**Seamless under chassis mounted 25L fuel tank** (w/level gauge) protected from heat with front fill point safety.

## STANDARD EQUIPMENT



**Gun:** J5500k low trigger force gun w/swivel & lance coupling system.

**Lance:** JW Straight stainless steel lance w/ snap coupling + nozzle w/protector & tail



**Hose:** 15m non marking double wire braid hose w/M22 couplings




**Chemical:** JW easy foam kit w/1L bottle



G2 WASHBOX VIDEO

## DIMENSIONS (MM)

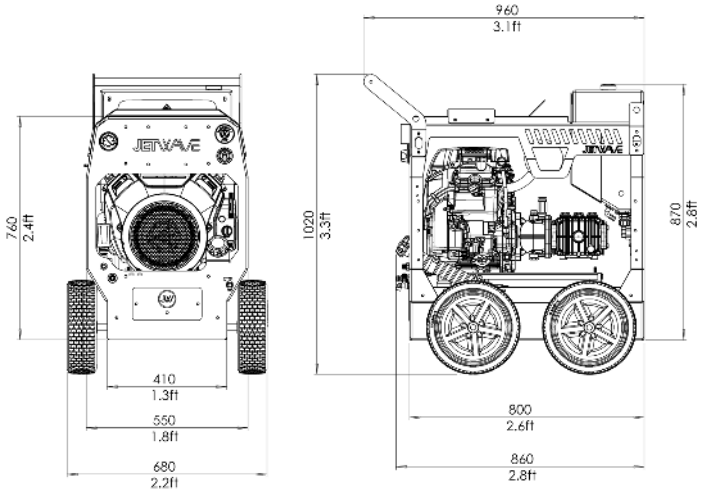


## TECHNICAL DATA 0:00

SENATOR G2 280-21

| | |
|---|---|
| Product Code | CW4000-21PEG2 |
| Pressure / Flow Rate | **4060 PSI** (280 BAR) / **21 L/PM** (1,260 L/PH) / **5.5 GPM** |
| Max Water Inlet Temp | 60°C / 140°F |
| Class (AS/NZS: 4223) | B (5,880 Bar/Litres) |
| Usage Frequency | Professional: Daily Usage |
| Nozzle Size | 05 |
| Frame Structure | CNC Modular galvanised steel chassis plus satin powder coat finish and **stainless steel cover** |

## MOTOR FEATURES

| | |
|---|---|
| Engine / Power | **Honda™ GX690** Electric Start (air cooled) 23HP / 690cc |
| Fuel Type / Capacity / Protection | **Unleaded** / 25L (w/level gauge) / Low Oil Shutdown |

## HYDRAULIC FEATURES

| | |
|---|---|
| Pump / Head / Pistons | **JW® UDOR® Premium** Triplex Plunger / Brass (Nickle Plated) / Ceramic |
| Motor Pump Coupling / Pump RPM | **Gearbox Drive / 1450RPM** |
| Unloader Valve | Independent (Panel Mounted) |
| Safety Valve | Yes |

## DIMENSIONS & WEIGHT

| | |
|---|---|
| Machine Dimensions / Weight | Skid: 860mm(L) x 550mm(W) x 870mm(H) / 150KG (approx.) |

## WARRANTY(S)

| | |
|---|---|
| Unit / Pump Warranty* | 2 Years |
| Engine Warranty* | 3 Years |

## OPTIONAL ACCESSORIES

| | |
|---|---|
| 30m Hose Reel w/30m total hose | 1060CMPL-SEN30M |
| 60m Hose Reel w/60m total hose | 1067CMPL-SEN60M |
| JW Pro Turbo Head | JWA303-05 |
| 21" Hammerhead - Stainless Steel | JWA-FSC22-5.05 |
| 30" Hammerhead - Stainless Steel | JWA-FSC30.06 |

## OPTIONAL UPGRADES

| | |
|---|---|
| **4 Wheel Trolley Kit** | JWA407-S |
| **Hose Reel Roller Guide System HGS™** | 1067-GUIDEASSY (1067 Only) |

**Copyright © 2023 Jetwave® Group Pty Ltd. All Rights Reserved.**

The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.
*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

*V3.0 08/23*

JETWAVE GROUP

10-16 Smith Street, Thebarton, 5031, South Australia, AU +61 8 8371 3599 sales@jetwave.com.au jetwavegroup.com