
GENERAL PUMP

MSS-HD

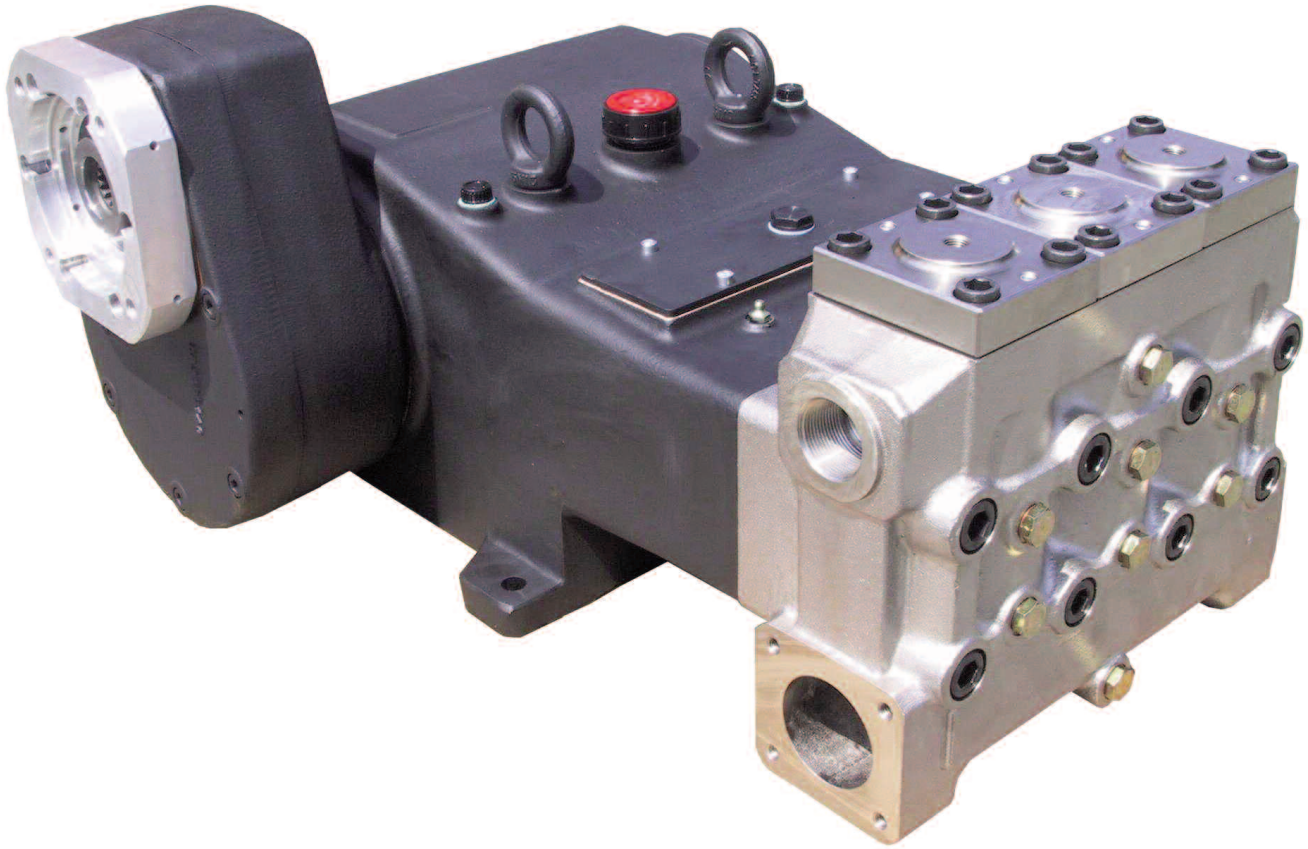

MSS-HD Series Hydrostatic Drive

GENERAL PUMP

INDUSTRIAL


INDUSTRIAL


SPECIFICATIONS


Model	MSS3618HDL5	MSS4018HDL5	MSS4518HDL5	MSS5018HDL5	MSS5518HDL5
Max Pressure*	5000	3900	3050	2470	2000
Max Flow	35.9	44.4	56.3	69.5	84.0
Max RPM (Input)	1800				
Hydraulic HP	104.7	101.0	100.2	100.2	98.0
Inlet Port	(2) 2-1/2” NPT-F				
Outlet Port	(2) 1-1/4” NPT-F				
Input Shaft Configuration	Hollow SAE J744 Splined 14-Tooth				
Options	Drain Valve Kit (p/n F208006920) Please Note: Kit contains three complete assemblies				

*Pressure ratings are for intermittant duty only. For other applications contact GP Companies Technical Support at 888-484-5487

DIMENSIONS - IN” (MM)

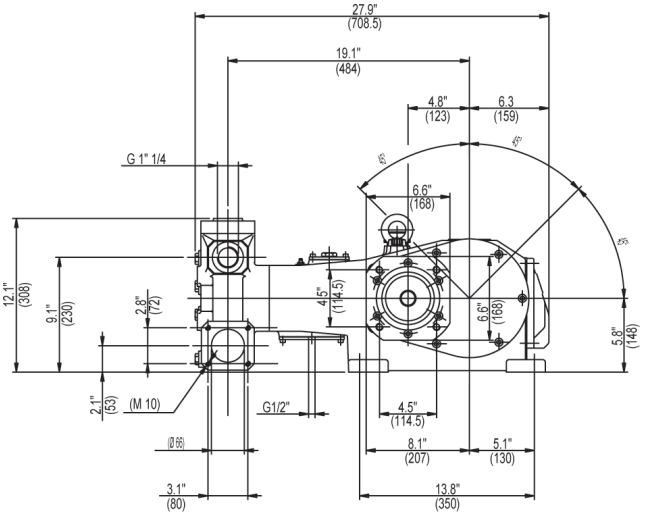

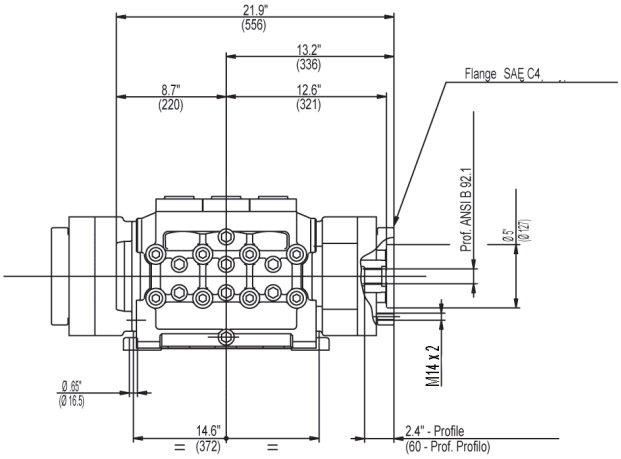

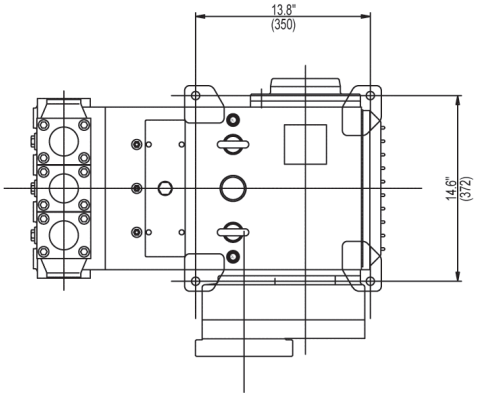

Coupler Spline Data ANSI B92.1-1970	
Type	Flat Root Side
Class	5
No. Teeth	14
Pitch	12/24
Pressure	30º
Pitch Ø	1.1667 (29.634)
“B”	1.20 (30.5)
“C”	.87 (22.1)
J744 Shaft Code	32-4 (C)

Ref 300569 Rev. C
10-08

GENERAL PUMP 1174 Northland Drive • Mendota Heights, MN 55120
Phone: (651)686-2199 • Fax: (651)454-8015 • e-mail: sales@gpcompanies.com • www.generalpump.com

GENERAL PUMP