



- Heavy Duty Brass Manifold
- Solid Ceramic Plungers
- Stainless Steel Plunger Guides and Check Valves
- Bronze Connecting Rods
- 1-1/4" Hose Barb Inlet
- (2) 3/4" BSP-F Outlet
- 128 oz. Capacity Vented Oil Bath Crank Case
- Max Fluid Temp, 160°F

TS 1C
1-3/8" PTO x
35mm Keyed



TS 2C
1-3/8" PTO x
1-3/8" PTO




Scan this QR Code
for more information

## GAMMA-IL Series Plunger Pumps

35 mm Solid Shaft x 1-3/8" 6 Spline PTO Thru Shaft

| | Model | Flow | | Pressure | | Plunger Dia. | Crankshaft | | Power | Seal Kit | Valve Kit | Wt. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | GPM | l/min | PSI | bar | | Stroke | Code | | | | |
| 600 RPM | GAMMA-IL 83 TS 1C | 22.2 | 84.0 | 1450 | 100 | 50mm | 24.0mm | N | 21.5 EBHP | 6062.50 | 6062.49 | 118 lbs |
| | GAMMA-IL 83 TS 2C | 22.2 | 84.0 | 1450 | 100 | 50mm | 24.0mm | N | 21.5 EBHP | 6062.50 | 6062.49 | 118 lbs |
| | GAMMA-IL 103 TS 1C | 28.3 | 107.0 | 1450 | 100 | 50mm | 30.4mm | L | 27.4 EBHP | 6062.50 | 6062.49 | 118 lbs |
| | GAMMA-IL 103 TS 2C | 28.3 | 107.0 | 1450 | 100 | 50mm | 30.4mm | L | 27.4 EBHP | 6062.50 | 6062.49 | 118 lbs |

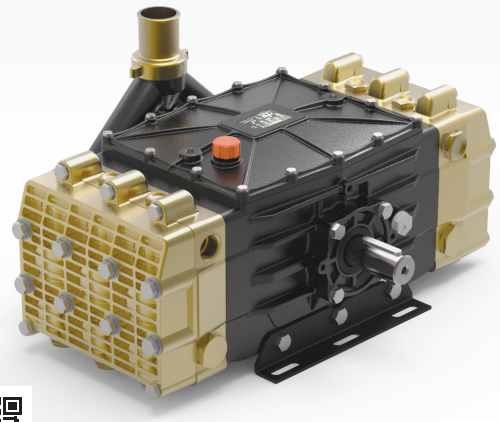

- Heavy Duty Brass Manifold
- Solid Ceramic Plungers
- Stainless Steel Plunger Guides and Check Valves
- Bronze Connecting Rods
- 2" Hose Barb Inlet
- (4) 3/4" BSP-F Outlet
- 64 oz. Capacity Vented Oil Bath Crank Case
- Max Fluid Temp, 160°F

TS 1C
1-3/8" PTO x
35mm Keyed



TS 2C
1-3/8" PTO x
1-3/8" PTO



Scan this QR Code
for more information

## GAMMA-IL Series Plunger Pumps

35 mm Solid Shaft x 1-3/8" 6 Spline PTO Thru Shaft

| | Model | Flow | | Pressure | | Plunger Dia. | Crankshaft | | Power | Seal Kit | Valve Kit | Wt. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | GPM | l/min | PSI | bar | | Stroke | Code | | | | |
| 600 RPM | GAMMA-IL 160 TS 1C | 43.1 | 163.0 | 1160 | 80 | 50mm | 24.0mm | N | 33.4 EBHP | 6062.71 | 6062.70 | 152 lbs |
| | GAMMA-IL 200 TS 1C | 54.4 | 202.0 | 1160 | 80 | 50mm | 30.4mm | L | 42.2 EBHP | 6062.71 | 6062.70 | 152 lbs |
| | GAMMA-IL 200 TS 2C | 54.4 | 202.0 | 1160 | 80 | 50mm | 30.4mm | L | 42.2 EBHP | 6062.71 | 6062.70 | 152 lbs |

## Dimensional Drawings

