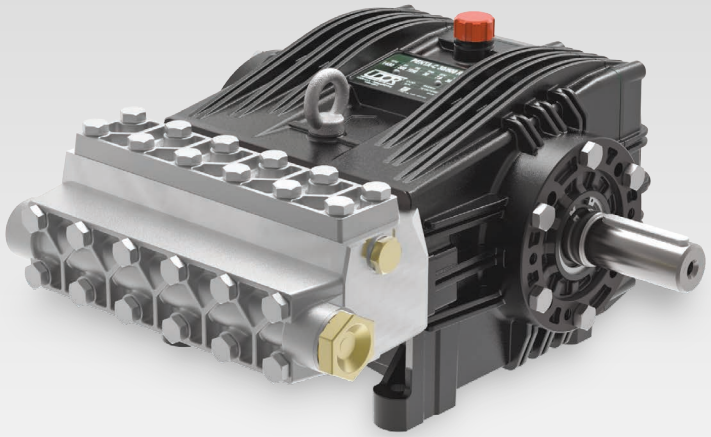

- 316 Stainless Steel Manifold
- Solid Ceramic Plungers
- Stainless Steel Plunger Rods and Check Valves
- Replaceable PTFE Coated Body Guides
- Heavy Duty Bronze Connecting Rods with Guide Pins for Perfect Cap Alignment.
- Heavy Duty Flat Base High Pressure Seals
- Dual Roller Bearings
- 118 oz. Oil Capacity
- 1" BSP-F Inlet. 1/2" BSP-F Outlet
- Max Fluid Temp, 160°F

Scan this QR Code for more information

PENTA 600 Series Plunger Pumps

35 mm Solid Keyed Shaft

	Model	GPM	l/min	PSI	bar	Power Req.	Seal Kit	Valve Kit	Weight
1000 RPM	**PENTA-B 21/600 R**	5.5	21.0	8700	600	32.3 EBHP	6072.23 (Kit 278)	6072.25 (Kit 280)	98 lbs
1450 RPM	**PENTA-C 30/600 R**	7.9	30.0	8700	600	46.2 EBHP	6072.23 (Kit 278)	6072.25 (Kit 280)	98 lbs
1750 RPM	**PENTA-D 7.5/88 R**	7.4	28.0	8700	600	43.1 EBHP	6072.23 (Kit 278)	6072.25 (Kit 280)	98 lbs

NOTE: All pump models available with left-hand drive option. Substitute 'L' for "R' in model number when ordering (ex. PENTA-D 7.5/88 L)

Dimensional Drawings

Dimensional Drawings are Shown in Millimeters. To Convert to Inches, Multiply Dimension x 0.03937

