Stainless Steel Submersible Pump

Pump Specifications:

0.4 HP ..... 1-1/4" Outlet
0.6 HP ..... 1-1/2" Outlet

Flow..... up to 42 GPM (159 lpm)
Head ..... up to 26 ft. (8 m)
Max Temperature ..... 122°F (50°C)



Thermoplastic Impeller
Includes Float Switch (Can operate completely or partially submersed)
Solids: .197in/mm

XAS

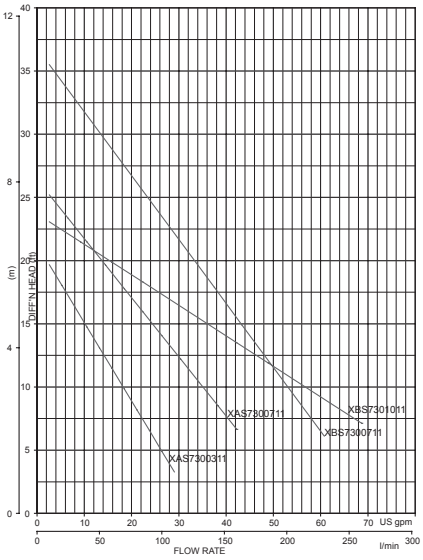

Applications:

- Draining water
- Draining mildly aggressive, non-flammable liquids

Stainless Steel Submersible Pump

Pump Specifications:

0.8 ..... 1-1/2" Outlet (Solids: .394in/10mm)
1.0 ..... 2" Outlet (Solids: 1.379in/mm)

Flow..... up to 68.6 GPM (260 lpm)
Head ..... up to 35 ft. (10.6 m)
Max Temperature ..... 122°F (50°C)



304 Stainless Steel Impeller
Can Operate Completely or Partially Submersed

XBS

Applications:

- Draining Tanks
- Pumping Dirty Water and Sewage
- Domestic and Industrial Waste Water