
SprayTarget

VeriVolume

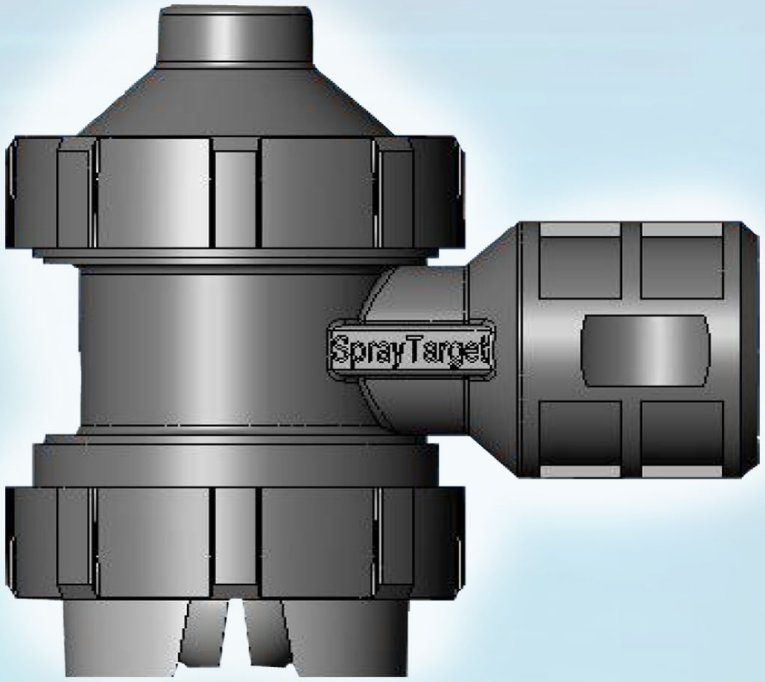

ONE
VeriVolume™
Nozzle Replaces
EIGHT
Flood Nozzles

Excellent for High Volume Broadcast Applications of Varying Rates

Delavan AgSpray Products

VeriVolume

Applications

- Soil incorporation
- Pre-emerge applications
- Post emerge / systemic applications


SprayTarget

Features and Specifications

- Flow rate variable from 1 to 12 GPM as varying pressure from 10 to 50 PSI
- Wide range of application rate (10-70 GPA @15MPH) achievable on one nozzle
- Flow rate controllable on the go
- Fast response to the rate change
- Flat fan spray with tapered edge and extra wide spray angle
- Spray angle of 140° constant over the range of flow rates
- Spray height variable from 30 to 60 inches
- Optimum droplets for uniform coverage and drift reduction
- Uniform coverage along the spray boom and travel direction
- 3/4" cam-lock quick coupler or 1/2" NPT-F
- Compatible with pressure regulators or automatic rate controllers
- Adaptable to conventional spray systems
- Excellent chemical and wear resistance
- Flexible and large orifices allowing significant reduction in nozzle plugging



Flat fan spray with tapered edge and wide angle allowing uniform spray distribution along spray boom at various spray heights

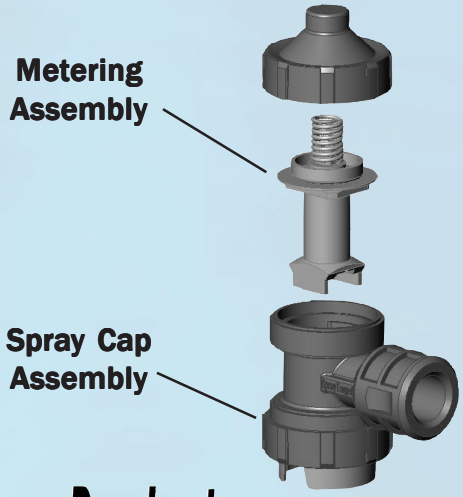

GP | Delavan AgSpray Products

GP|Delavan AgSpray Products
1174 Northland Drive * Mendota Heights, MN 55120
651.905.2385 * Fax: 651.454.4880 email: quyb@gpcompanies.com
www.delavanagspray.com