GENERAL PUMP *A member of the Interpump Group*

Y29074000
Plastic Hose Reels




SPECIFICATIONS

PART NUMBER	Y29074000
3/8" Hose Capacity	130 ft.
Swivel Pressure Rating	3,650 PSI
Inlet	3/8" BSP-F
Outlet	3/8" BSP-F
Max. Temp	195º F
Weight	8.43 lbs.

FEATURES / BENEFITS

- Shock proof plastic
- Direct hand-crank rewind with locking pin
- Painted steel base
- Brass swivel


DIMENSIONS

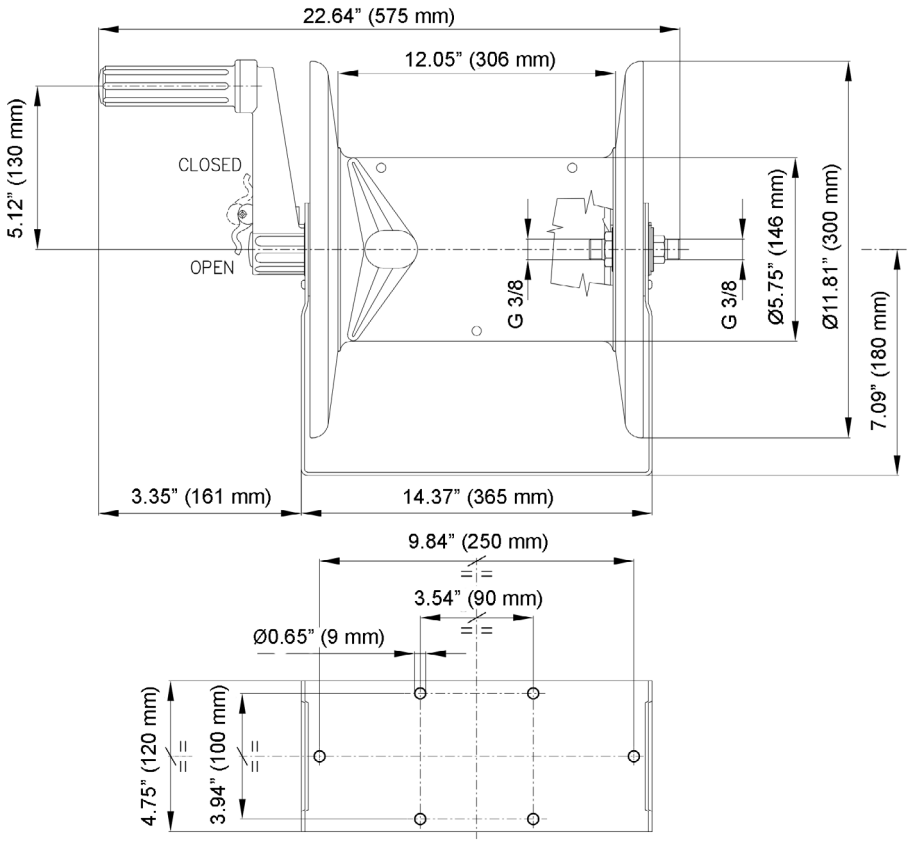

ACCESSORIES

Y29074000
Plastic Hose Reels

PARTS LIST

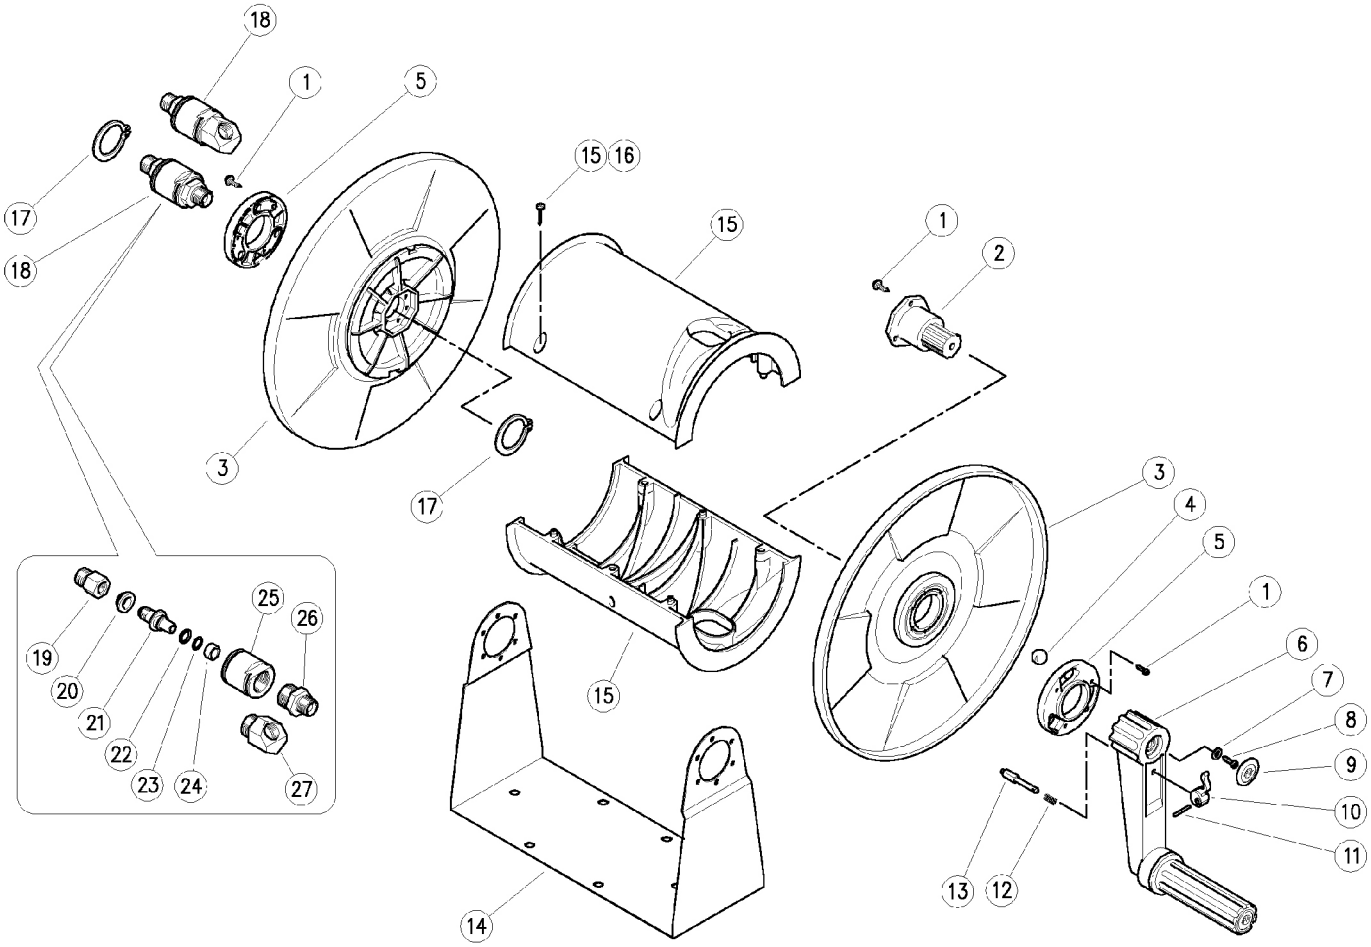

Item	Part No.	Description	QTY
1	Y16309212R	Screw, 4x14 mm	9
2	Y29071384R	Transmission Pin	1
3	Y29071284R	Side Disk	2
4	Y14742700R	Ball, 7 mm Sst.	3
5	Y29071484R	Washer	2
6	Y29072321R	Crank	1
7	Y14356905R	Washer, 6.4x11x1 mm Sst.	1
8	Y16309625R	Screw, 6x25 mm Sst.	1
9	Y41041184R	Plug, Knob	1
10*	Y29071684R	Lever	1
11*	Y15103500R	Parallel Pin, 3x19 mm Sst.	1
12*	Y29072251R	Spring, 0.7x6.9x24 mm Sst.	1
13*	Y29071731R	Safety Stud	1
14	Y29074163R	Support	1
15	Y29074584R	Semi-shell	2
16	Y16307751R	Screw, 3.5x20 mm Sst.	8

Item	Part No.	Description	QTY
17	Y10103500R	Snap Ring, E 35	2
18	Y26110000R	Swivel, Complete, Brass	1
19	Y26110131R	Coupler, M12 F-3/8M Bsp	1
20	Y26104584R	Bushing, 12x20x6 mm	1
21	Y26104131R	Pin, M12x1.25	1
22	Y10404001R	Back-up Ring, 10.2x13.9x1.2 mm	1
23	Y10310995R	O-ring, 2.4x9.3 mm Vi 70	1
24	Y26104684R	Bushing, 10x14x7 mm	1
25	Y26110431R	Housing, M22x1M-3/8 Bsp	1
26	Y26110531R	Coupling, 3/8M Bsp-M22x1F	1
27	Y26118385R	Coupler, 45º 3/8F Bsp-22-1M	1
*	Y29921098R	Crank Replacement Kit	

GENERAL PUMP *A member of the Interpump Group*


Y29074000
Plastic Hose Reels

ASSEMBLY / OPERATING INSTRUCTIONS


Tools Required:
1. Phillips screwdriver
2. 8 mm socket or wrench
3. Snap ring pliers

Max Torque Settings:


Position	Description	Ft. Lbs.	Nm.
A	Phillips Screw M4 x 12 mm	1.5	2
B	Hex Head Bolt M6 x 20 mm	2.2	3
C	Phillips Screw M3.5 x 20 mm	1.1	1.5




1. Using a snap ring pliers, remove the outer snap ring on the swivel side flange

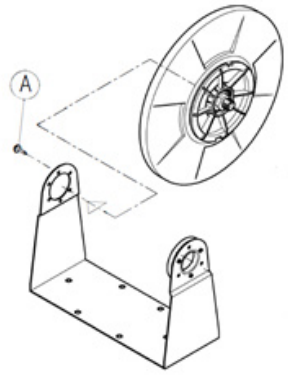


2. Using a screwdriver, secure swivel side flange to support arm without the bearing washer by installing (3) M4 x 12mm screws.

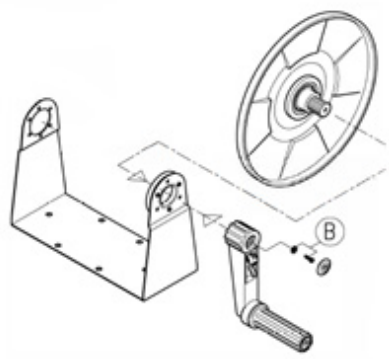

3.Using an 8mm socket, secure handle side flange to support arm by M6 washer, M6 x 20 bolt and knob plug.

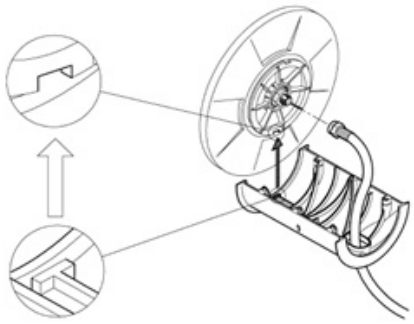

4. Place one half of the drum with the hose opening faced away from swivel onto the flanges, be careful to align the notch and groove. Feed hose through hole and attached to swivel (check for leaks).

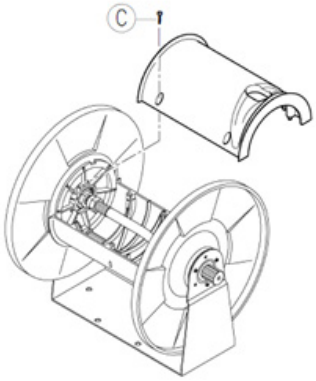

5. Place the other half of the drum with the hose opening faced away from swivel onto the flanges, be careful to align the notch and groove. Using a screwdriver secure the two halves together by installing (8) M3.5 x 20mm screws.

WARNING!

Exposure of skin directly to pressurized air or fluids could result in severe bodily injury!

Warning. Only **trained** and **qualified** personnel should install or replace the device.

Warning. De-pressurize prior to servicing.

GENERAL PUMP • 1174 Northland Drive • Mendota Heights, MN 55120
Phone: 651.686.2199 • Fax: 800.535.1745 • email: sales@gpcompanies.com • www.generalpump.com

Ref 301068 Rev A
04-21

GENERAL PUMP