UR28

05.028-xx-x

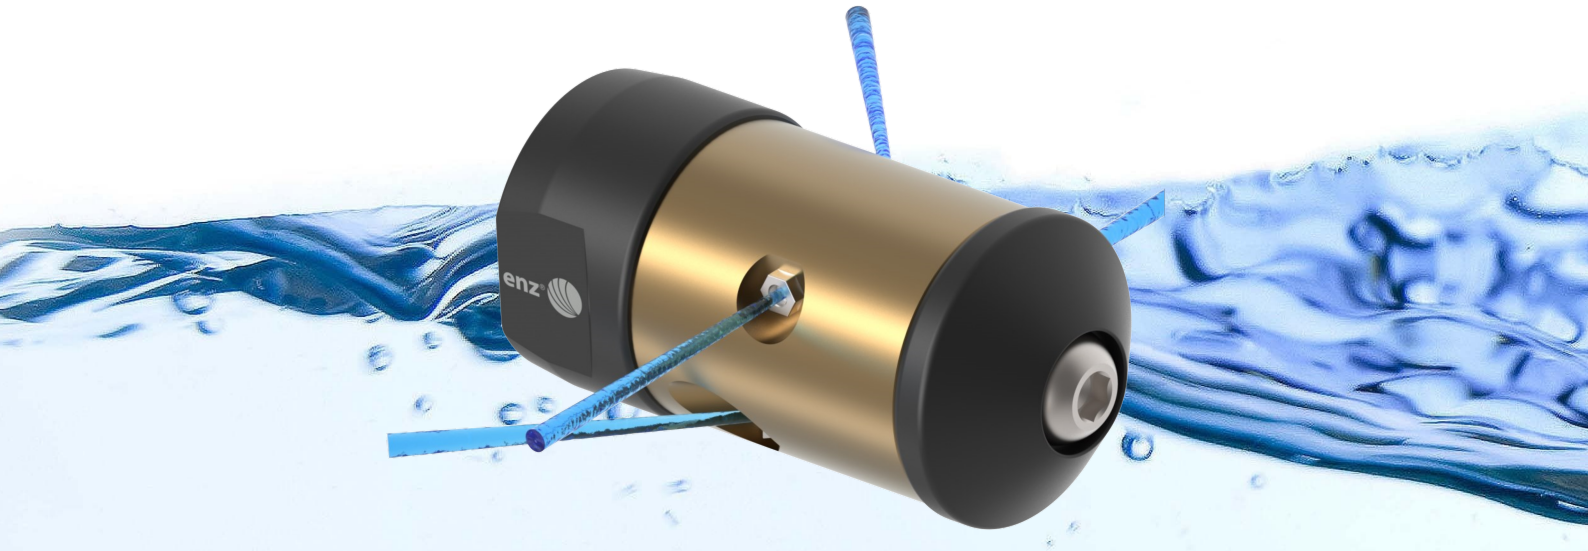

Advantages:

- Ø28 mm nozzle for pressures up to 1500 bar (22,000 psi)
- KBR jet configuration (90° + 45°)
- High water jetting density due to ceramic inserts
- Short design with excellent navigation in pipe bends (Ø28 mm / 1.1“)

Area of application:

- Cleaning of heat exchanger tubes
- General industrial cleaning
- Pipe diameter: 30 - 42 mm (1.2 - 1.7“)

Specifications:

Product		min				max	ØxL
05.028-A-2	1/4“ BSPP	30 l/min / 7.9 gpm	2	2	*	1500 bar / 22,000 psi	28x57 mm / 1.1x2.2“
05.028-NB-1	3/8“ NPT	25 l/min/ 6.6 gpm	2	2	*	1000 bar / 14,500 psi	28x57 mm / 1.1x2.2“
05.028-UB-2	9/16“ UNF	30 l/min / 7.9 gpm	2	2	*	1500 bar / 22,000 psi	28x57 mm / 1.1x2.2“