
ZETA 350 / ZETA 400


Scan this QR Code for more information

GREENTECH Diaphragms Standard. Buna-N Optional.

ZETA 350 & 400 low pressure 6-cylinder diaphragm pumps have anodized aluminum bodies with plasticized aluminum heads, stainless steel valves and glass-filled nylon manifolds.

ZETA 350 & 400 pumps are excellent for various horticultural and agricultural spraying applications.

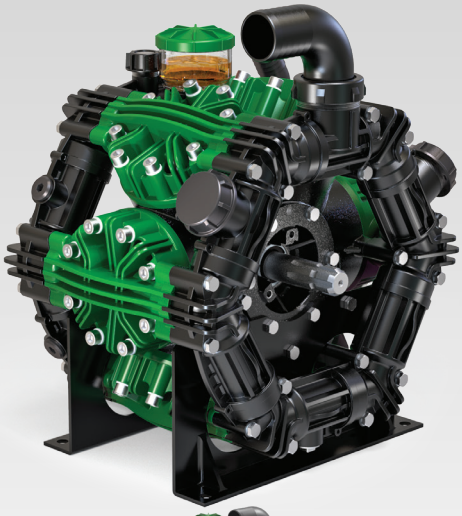

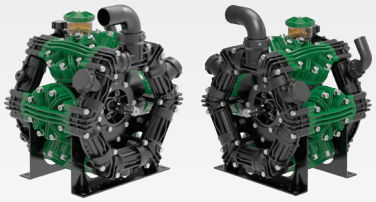

ZETA 350 TS2C / ZETA 400 TS2C




ZETA 350 MI1

Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
ZETA 350 TS2C	92.0	345.0	300	20	550	1-3/8" 6-Spline Male PTO Thru-Shaft	155 LBS
ZETA 350 MI1	92.0	345.0	300	20	550	2-Bolt, A-Flange, 1" Hollow Shaft for Hydraulic Motor	155 LBS
ZETA 400 TS2C	106.0	400.0	300	20	550	1-3/8" 6-Spline Male PTO Thru-Shaft	155 LBS

Specifications	ZETA 350	ZETA 400
Inlet Port	2" & 2-1/2" Hose Barb	2" & 2-1/2" Hose Barb
Outlet Ports - Valve	(2)1-1/2" Hose Barb	(2)1-1/2" Hose Barb
Piston Diameter	75.0mm	75.0mm
Crankshaft Stroke/Code	16.0mm / X	18.0mm / E
Dims. - Pump Only		20.5"L x 14.5"W x 23"H

Lubrication: Requires 155 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

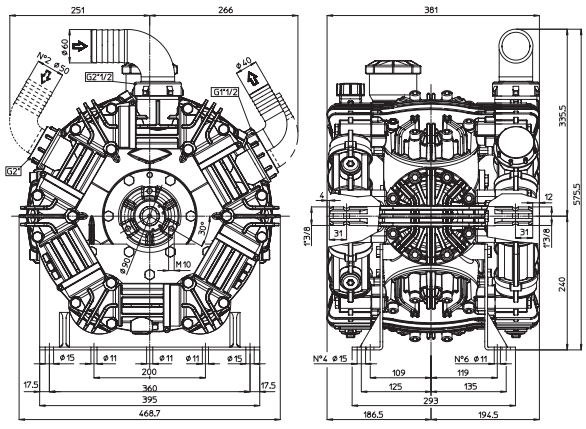

Dimensional Drawings are Shown in Millimeters. To Convert to Inches, Multiply Dimension x 0.03937

QUICK REFERENCE SERVICE PARTS

Description	Part #
Diaphragm Kit - GREENTECH	6062.G1
Diaphragm Bolt & Washer Kit	6062.G2
Valve Kit	6062.F9
Complete Repair Kit	8700.43CK

Recommended Accessories and Drive Options

GREENTECH





6066.09
Shaft Protector and Mounting Bolts



6066.05
PTO Drive Safety Shield



VRG-400
Pressure Regulator



15.5823
Udor Lube Premium Pump Oil