ANNOVI REVERBERI®
The Power of Experience





INDUSTRIAL DIVISION *NEWS*

228 Series

POMPA ALBERO MASCHIO
Solid shaft pump


idropulitrici *pressure washers*
processi industriali *industrial processes*
autolavaggio *car wash*
agricoltura *agriculture*
municipality
cantieri ed edilizia *construction industry*

Premium Series

LOW MAINTENANCE
HIGH EFFICIENCY



CAR WASH

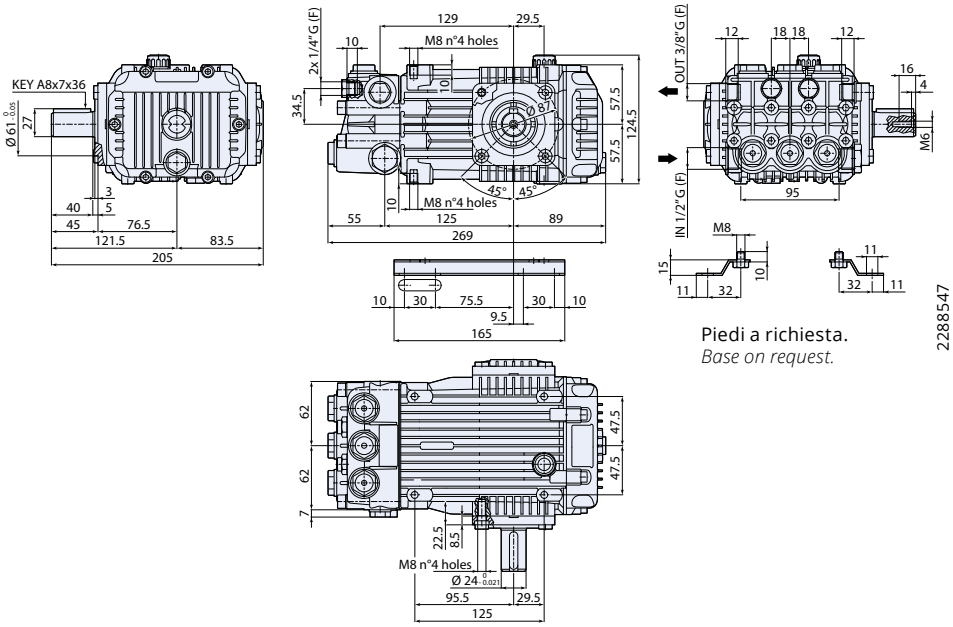

Piedi a richiesta.
Base on request.

2288547

N version

MOD	MAX l/min	MAX gpm	MAX bar	MAX psi	hp	kW	N° giri/1'	KG NET kg
JK 1450 rpm N version Ø 24 mm								
JK GREEN OIL	15	3,96	200	2900	7,5	5,5	1450	10

NSF Green oil H1 CERTIFIED

testa nichelata *nickel plated brass head*
bielle in bronzo *bronze connecting-rods*
NEW

322 Series

POMPA ALBERO MASCHIO
Solid shaft pump




idropulitrici *pressure washers*

processi industriali *industrial processes*

autolavaggio *car wash*

agricoltura *agriculture*

cantieri ed edilizia *construction industry*

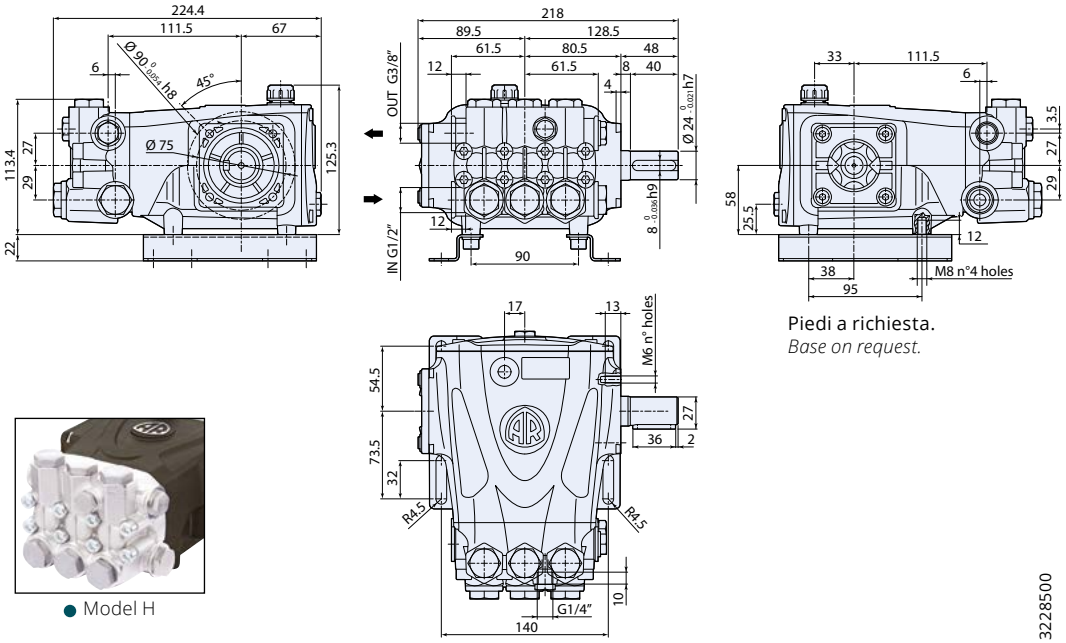

Piedi a richiesta.
Base on request.



Regulating valve version

● Model H

3228500

N version

Flangiatura compatibile XT N.
XT N flange type.

MOD	COD	MAX l/min	MAX gpm	bar	psi	hp	kW	N° giri/1'	KG NET kg
RR 1450 rpm N version Ø24 mm									
RR 13.20 N	**23771**	13	3,43	200	2900	7,5	5,5	1450	7,6
RR 15.15 N	**23772**	15	3,96	150	2200	5,5	4	1450	7,6
RR 15.20 N	**23507**	15	3,96	200	2900	7,5	5,5	1450	7,6
● RR 15.25 H N ○	**24934**	15	3,96	250	3625	10	7,5	1450	8
RR 18.12 N	**23773**	18	4,75	120	1740	5,5	4	1450	7,6
RR 18.16 N	**23774**	18	4,75	160	2300	7,5	5,5	1450	7,6
RR 20.20 N ○	**29836**	20	5,3	200	2900	9.5	7	1450	8
RR 21.20 N ○	**29835**	21	5,5	200	2900	10	7,5	1450	8
RR 22.20 N ○	**29759**	22	5,8	200	2900	11	8	1450	8
RRA 1750 rpm N version Ø24 mm									
RRA 3.5G25 N	**23779**	13,2	3,5	170	2500	6	4,5	1750	7,6
RRA 4G30 N	**23780**	15,1	4	205	3000	8,2	5,5	1750	7,6
● RRA 4G36 H N ○	**24937**	15,1	4	250	3600	8,6	6,4	1750	8
RRA 5.5G30 N	**23781**	20,8	5,5	205	3000	11	8,2	1750	7,6

NEW

● **testa nichelata** *nickel plated brass head*

○ **bielle in bronzo** *bronze connecting-rods*

testa in ottone *brass head*

bielle in alluminio *aluminium connecting-rods*

538 Series

POMPA ALBERO MASCHIO
Solid shaft pump



lavaggio industriale *industrial cleaning*

processi industriali *industrial processes*

autolavaggio *car wash*

produzione *manufacturing*


agricoltura *agriculture*

municipality

misting

pulizia tubazioni *sewer jetting*

antincendio *fire fighting*

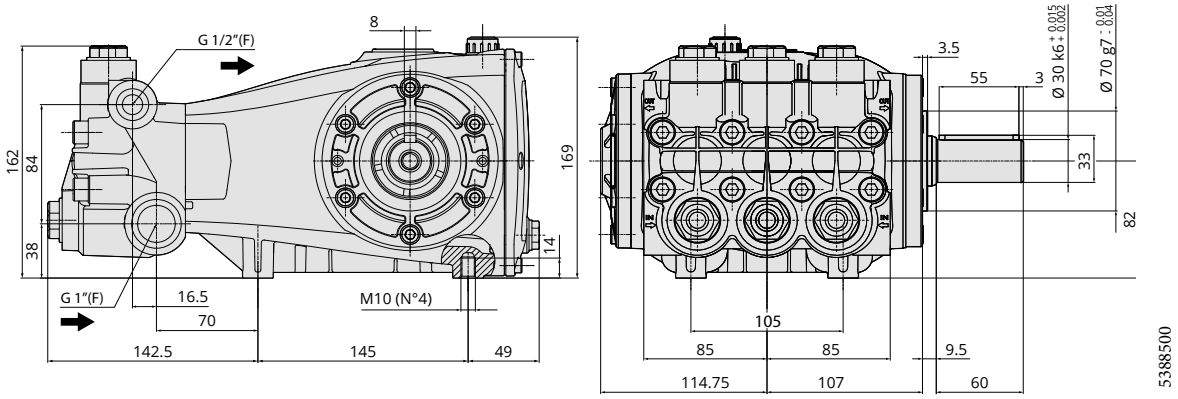

N version

MOD	COD	MAX l/min	MAX gpm	bar	psi	hp	kW	N° giri/1'	KG NET kg
RF 1450 rpm N version Ø30 mm									
RF 22.400 N DX	**29514**	22	5.8	400	5800	22	16.5	1450	22
RF 27.400 N DX	**29513**	27	7.1	400	5800	27	20	1450	22
RF 36.400 N DX	**29148**	36	9.5	400	5800	36.2	27	1450	22
RF 39.400 N DX	**29512**	39	10.3	400	5800	39	29	1450	22
RFA 1750 rpm N version Ø30 mm									
RFA 7G50 N DX	**29968**	26.5	7	350	5000	23	17	1750	22
RFA 8G50 N DX	**29969**	30	8	350	5000	27	20	1750	22
RFA 10.7G50 N DX	**29970**	40	10.7	350	5000	36.2	27	1750	22

NEW

testa in ottone *brass head*

bielle in bronzo *bronze connecting-rods*

366 Series

POMPA ALBERO MASCHIO
Solid shaft pump



lavaggio industriale
industrial cleaning


processi industriali
industrial processes

municipality

pulizia tubazioni
sewer jetting

cantieri ed edilizia
construction industry

settore navale
marine industry

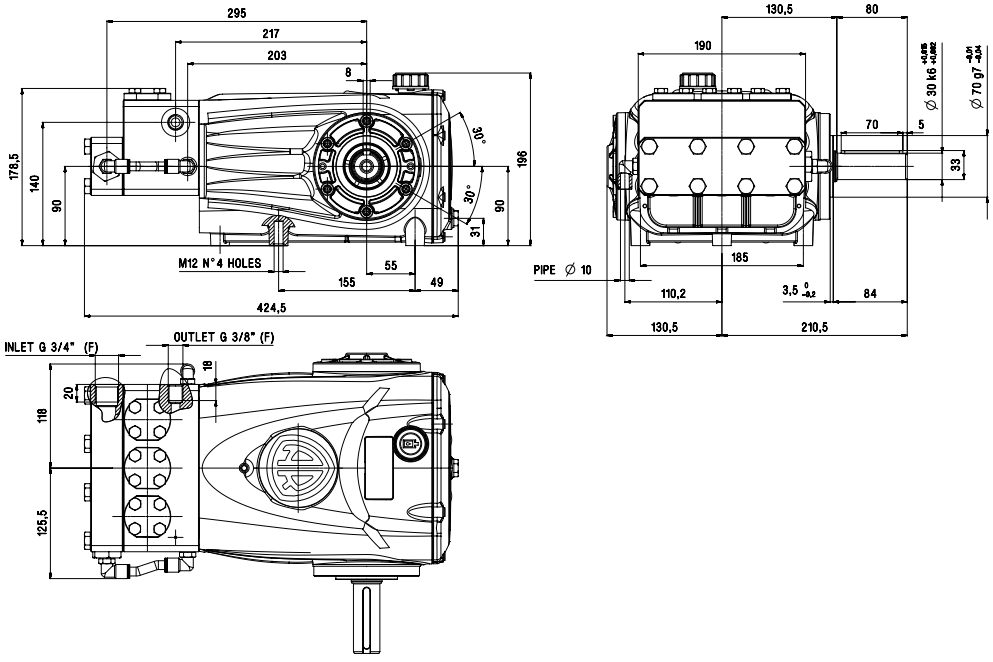

N version

MOD	COD	MAX		MAX					NET
		l/min	gpm	bar	psi	hp	kW	N° giri/1'	kg
RTX-I 1450 rpm N version Ø 30 mm									
RTX-I 24.800 N	**28954**	24	6.34	800	11600	48	36	1450	34

NEW

testa in acciaio inox
inox pump head

bielle in bronzo
bronze connecting-rods

418 Series


POMPA ALBERO MASCHIO
Solid shaft pump




lavaggio industriale
industrial cleaning

municipality

pulizia tubazioni
sewer jetting

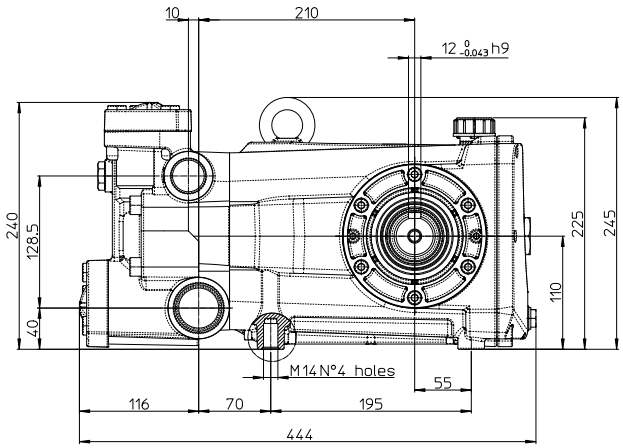

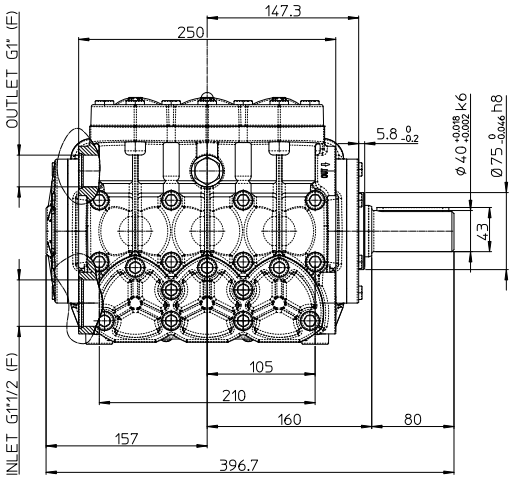

N version

MOD	COD	MAX		MAX					KG NET
		l/min	gpm	bar	psi	hp	kW	N° giri/1'	kg
RTD-J 1000 rpm N version Ø 40 mm									
RTD-J 80.350 H N	**29807**	80	21.1	350	5100	75	55	1000	63.8
RTD-J 130.220 H N	**29714**	130	34.3	220	3200	75	55	1000	59.0
RTD-J 160.180 H N	**29715**	160	42.3	180	2600	75	55	1000	59.0
RTD-J 210.150 H N	**29716**	210	55	150	2200	80	60	1000	59.0
RTD-J 1150 rpm N version Ø 40 mm									
RTD-J 240.140H N	**29717**	240	63.4	140	2000	86	64	1150	59.0

NEW

testa nichelata
nickel plated brass head

bielle in bronzo
bronze connecting-rods


Stainless Steel


POMPA ALBERO MASCHIO
Solid shaft pump



industria alimentare
food industry

settore navale
marine industry

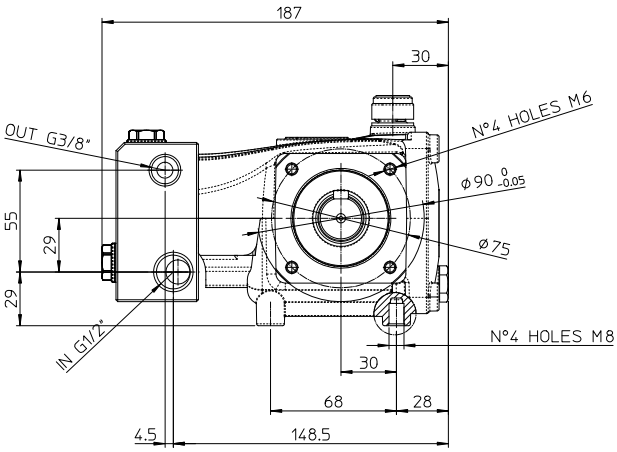

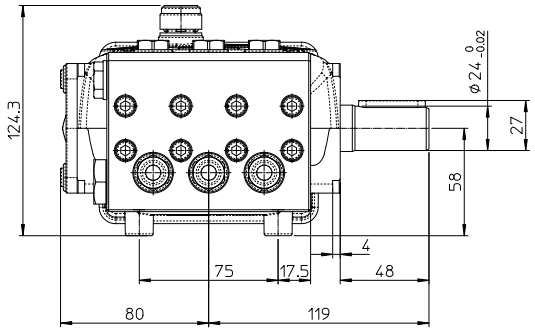

N version

MOD	COD	MAX l/min	MAX gpm	MAX bar	MAX psi	hp	kW	N° giri/1'	NET kg
RC-SS N version Ø24 mm									
RC-SS 9.15 N	**29471**	9	2,40	150	2200	3,5	3	1450	7
RC-SS 11.15 N	**29472**	11	2,90	150	2200	4,4	3,3	1450	7
RC-SS 13.15 N	**29473**	13	3,60	150	2200	4,8	3,6	1450	7
RC-SS 14.15 N	**29474**	14	3,70	150	2200	5,1	3,9	1450	7

testa in AISI 316L
AISI 316L pump head

bielle in bronzo
bronze connecting-rods

O-Ring in Viton
Viton O-Rings


NEW


Additional Electric Motor

ELECTRIC MOTOR-PUMP UNITS



idropulitrici
pressure washers

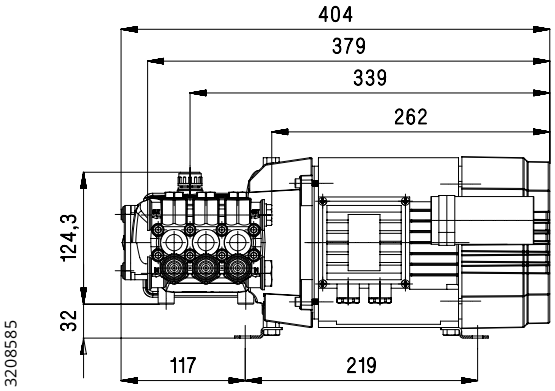

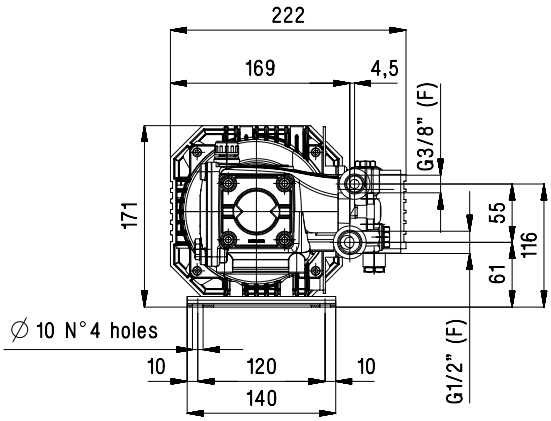

Valvole di regolazione a richiesta.
Regulating valve on request.
Manometro fornito a richiesta.
Pressure gauge on request.

MOD	COD.	MAX		MAX							KG NET
	3 ~	l/min	gpm	bar	psi	hp	kW	N° giri/1'	V 1-50Hz	V 3-50Hz	kg
HRC 1450rpm											
HRC 8.14 ET	**28601**	8	2,11	140	2000	3	2,2	1450	-	230/400	22,5
HRC 9.14 ET	**28604**	9	2,37	140	2000	3	2,2	1450	-	230/400	22,5

testa in ottone
brass head

bielle in alluminio
aluminium connecting-rods

3~50Hz


frequenza motore
motor frequency

NEW

Additional Electric Motor



idropulitrici
pressure washers

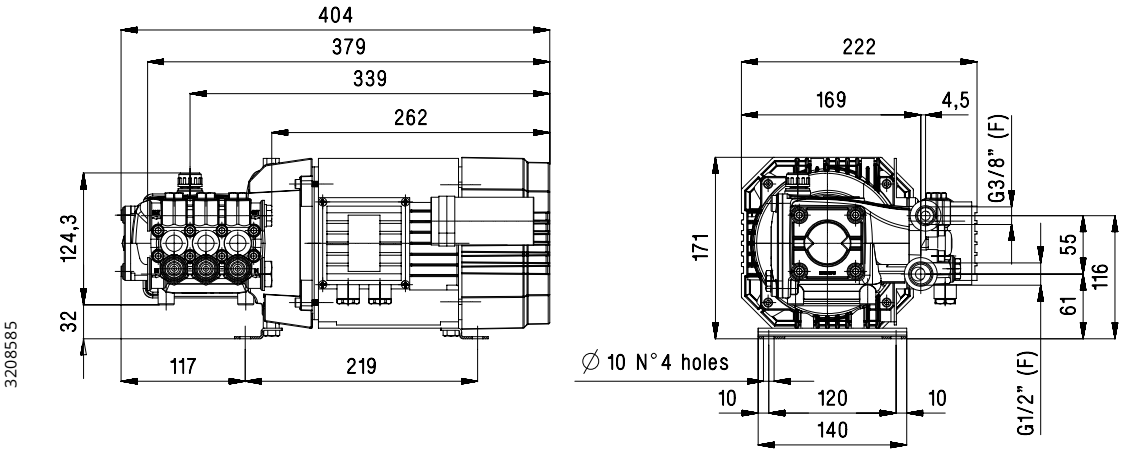

Valvole di regolazione a richiesta.
Regulating valve on request.
Manometro fornito a richiesta.
Pressure gauge on request.

MOD	COD	MAX		MAX						NET
	1 ~	l/min	gpm	bar	psi	hp	kW	N° giri/1'	V 1~60Hz	kg
HRCA 1750 rpm										
HRCA 2G18 EM	**70023**	8	2,11	120	1740	2,5	1,8	1750	230	21,5

testa in ottone
brass head


bielle in alluminio
aluminium connecting-rods

frequenza motore
motor frequency

Additional Electric Motor

misting



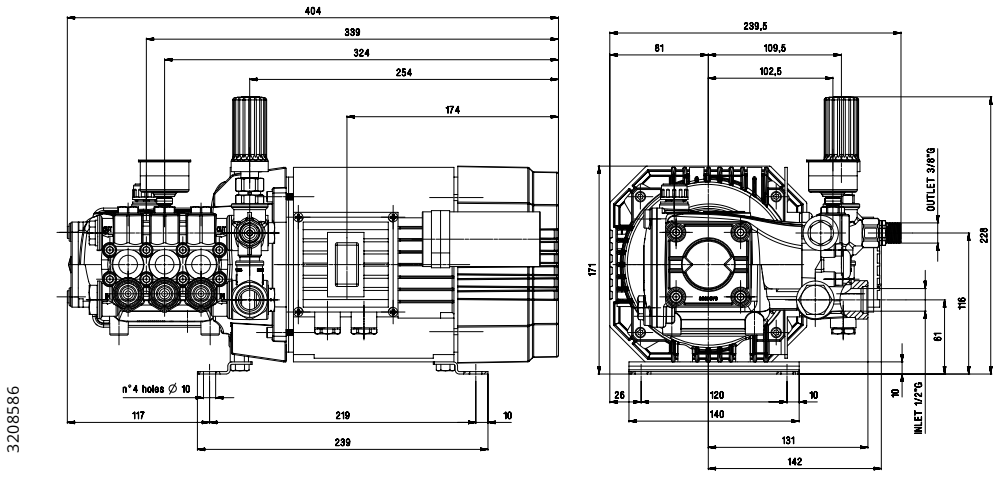

3208586

MOD	COD	MAX		MAX						NET
	1 ~	l/min	gpm	bar	psi	hp	kW	N° giri/1'	V 1-50Hz	kg
HRC-M 1450 rpm										
HRC-M 02.08 EM	**70012**	2	0,52	80	1145	0,5	0,35	1450	230	22
HRC-M 04.08 EM	**70014**	4	1,06	80	1145	1	0,7	1450	230	22
HRC-M 06.08 EM	**70016**	6	1,58	80	1145	1	0,7	1450	230	22
HRC-M 08.08 EM	**70018**	8	2,11	80	1145	1,8	1,35	1450	230	22
HRC-M 11.07 EM	**70020**	11	2,90	70	1015	2,2	1,65	1450	230	22
HRC-M 13.06 EM	**70022**	13	3,43	60	870	2,2	1,65	1450	230	22

testa in ottone
brass head

bielle in alluminio
aluminium connecting-rods

1~50Hz

frequenza motore
motor frequency

Accessori
accessories

RIDUTTORI
Gear Boxes



CR 3/4”

Riduttore 1:2 per motori a scoppio/ diesel con albero cilindrico 3/4” (19,05 mm) e flangia SAE J609a.
1:2 reduction gear box for gas/diesel engines with 3/4” cylindrical shaft and SAE J609a flange.

XT series
COD.1694

XM, RK series
COD.1692

Riduttore 1:2,24 per motori a scoppio/ diesel con albero cilindrico 3/4” (19,05 mm) e flangia SAE J609a.
1:2,24 reduction gear box for gas/diesel engines with 3/4” cylindrical shaft and SAE J609a flange.

XM, RK series
COD.1691



CR 1”

Riduttore 1:2 per motori a scoppio/ diesel con albero cilindrico 1” (25,4 mm) e flangia SAE J609a.
1:2 reduction gear box for gas/diesel engines with 1” cylindrical shaft and SAE J609a flange.

XT series
COD.1693

XM, RK series
COD.1690

RG, RW, XW, SXW series
COD.1697

Riduttore 1:2,24 per motori a scoppio/ diesel con albero cilindrico 1” (25,4 mm) e flangia SAE J609a.
1:2,24 reduction gear box for gas/diesel engines with 1” cylindrical shaft and SAE J609a flange.

XM, RK series
COD.1689

RG, RW, XW, SXW series
COD.1698



CR 1”1/8

Riduttore 1:2 per motori a scoppio/ diesel con albero cilindrico 1” 1/8 (28,6 mm) e flangia SAE J609a.
1:2 reduction gear box for gas/diesel engines with 1” 1/8 cylindrical shaft and SAE J609a flange.

RG, RW, XW, SXW series
COD.1670



WG31

Utilizzabile con motori fino a 31HP.
For motors up to 31HP.

NEW

Riduttore 1:2.2 a denti elicoidali per motori a scoppio/diesel con albero cilindrico 1” 1/8 (28,6 mm) e flangia SAE J609 fl.B - C.
1:1.2.2 reduction gear box with helical teeth for gas/diesel engines with 1” 1/8 cylindrical shaft and SAE J609 B - C flanges.

RG, RW, XW, SXW series
COD.29593

Riduttore 1:2 a denti elicoidali per motori a scoppio/diesel con albero cilindrico 1” 1/8 (28,6 mm) e flangia SAE J609 fl.B - C.
1:1.2 reduction gear box with helical teeth for gas/diesel engines with 1” 1/8 cylindrical shaft and SAE J609 B - C flanges.

RG, RW, XW, SXW series
COD.29594



WG40

Utilizzabile con motori fino a 40HP.
For motors up to 40HP.

NEW

Riduttore 1:2.25 a denti elicoidali per motori a scoppio/diesel on albero cilindrico 1” 1/8 (28,6 mm) e flangia SAE J609c.
1:1.2.25 reduction gear box with helical teeth for gas/diesel engines fwith 1” 1/8 cylindrical shaft and SAE J609c flange.

RTX, RF series
Motori HONDA/B&S / *HONDA/B&S engines*
COD.29403

RTX, RF series
Motori KOHLER / *KOHLER engines*
COD.29874

Riduttore 1:2.25 a denti elicoidali per motori a scoppio/diesel on albero cilindrico 1” 7/16 (36,5 mm).
1:1.2.25 reduction gear box with helical teeth for gas/diesel engines fwith 1” 7/16 cylindrical shaft.

RTX, RF series
Motori HONDA/B&S / *HONDA/B&S engines*
COD.29923

RTX, RF series
Motori KOHLER / *KOHLER engines*
COD.29924



WG75

Utilizzabile con motori fino a 75HP.
For motors up to 75HP

NEW

Riduttore 1:1.5 a denti elicoidali per motori a scoppio/diesel con albero maschio Ø40.
1:1.5 reduction gear box with helical teeth for gas/diesel engines with Ø40 male shaft.

RTD series
COD.28687

Riduttore 1:1.86 a denti elicoidali per motori a scoppio/diesel con albero maschio Ø40.
1:1.86 reduction gear box with helical teeth for gas/diesel engines with Ø40 male shaft.

RTD series
COD.28688

Riduttore 1:2.22 a denti elicoidali per motori a scoppio/diesel con albero maschio Ø40.
1:2.22 reduction gear box with helical teeth for gas/diesel engines with Ø40 male shaft.

RTD series
COD.28689

ANNOVI REVERBERI®
The Power of Experience

Seguici su / *Follow us on*

YouTube Instagram facebook LinkedIn

Annovi Reverberi spa
Via Martin Luther King 3
41122 Modena (Italy)
Tel +39 059 414 411
Fax +39 059 253 505
infoar@annovireverberi.it
www.annovireverberi.it

AR North America Inc.
140 - 81st Avenue Northeast
Fridley, MN USA 55432
Ph. +1 763 398 2008
Fax +1 763 398 2009
info@arnorthamerica.com
www.arnorthamerica.com

AR China Distribution Co., Ltd
2nd Floor, Build. 1, No. 651 Jiangting Rd.
Jinhui Town, Fengxian District, Shanghai
201404 China
Ph./Fax. +86 21 54846800 ext 815
info@ar-china.cn
www.ar-china.cn

AR Latin America
Rua Jandaia do Sul 125, Pinhais
Curitiba, Brasil, CEP 83324-440
Ph. +55 41 3059-2748
info@arlatam.com.br
www.annovireverberi.com.br
www.arlatam.com.br

Cod. 97225 - LF - 900000377

© 2024 Annovi Reverberi