



- Anodized Aluminum Crank Case
- Nickel-Plated Manifold
- Stainless Steel Check Valves
- Heavy Duty Bronze Connecting Rods
- Heavy Duty Roller Bearings
- 2-1/2" BSP-F Inlet. 1-1/4" BSP-F Outlet
- Max Fluid Temp, 160°F

HXR MI Series Plunger Pumps

HXR MI Series industrial duty plunger pumps are rated at 32.9 to 104.4 GPM and pressures up to 4350 PSI.

Gear reduction models are available in 1500, 1800 or 2200 RPM models with a 50mm solid, keyed shaft.

Applications include sewer jetting, hydro-excavation, fire fighting, mining and street cleaning.


	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
1800 RPM	HXR1-D 135/300 R MI	32.9	124.5	4350	300	32mm	70.0mm	35	95.8 EBHP	6700.09	6072.03	367.5 lbs
	HXR1-D 160/240 R MI	42.9	162.5	3480	240	36mm	70.0mm	35	100.0 EBHP	6700.10	6072.03	367.5 lbs
	HXR1-D 210/200 R MI	54.4	206	2900	200	40mm	70.0mm	35	105.7 EBHP	6700.07	6072.13	367.5 lbs
2.238:1 Gear Ratio	HXR1-D 270/160 R MI	68.7	260	2320	160	45mm	70.0mm	35	106.8 EBHP	6700.08	6072.13	367.5 lbs
	HXR1-D 330/130 R MI	86.1	326.0	1885	130	50mm	70.0mm	35	108.7 EBHP	6072.14	6072.13	367.5 lbs
	HXR1-D 400/100 R MI	104.4	395.1	1450	100	55mm	70.0mm	35	101.3 EBHP	6072.16	6072.13	367.5 lbs



HXR1-D 160/240 R MI

MAX FLOW
MAX PRESSURE
RATED PUMP SPEED
POWER REQUIREMENT
LUBRICATION

42.8 GPM / 162 L/MIN
3480 PSI / 240 BAR
800 RPM
100.0 HP ELECTRIC
237 OZ 85W-90 OIL

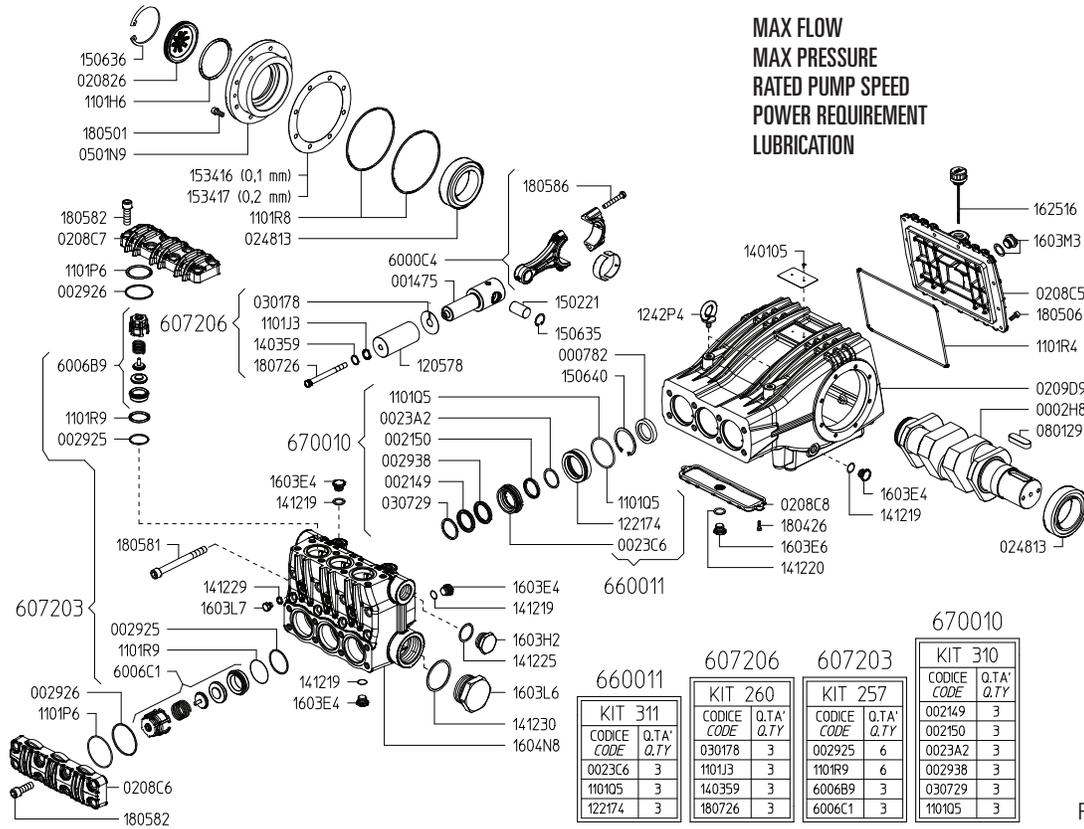

660011		607206		607203		670010	
KIT 311	KIT 260	KIT 257	KIT 310				
CODICE CODE							
Q.TA' Q.TY							
030178	030178	002925	002149	002149	002149	002149	002149
0023C6	0023C6	1101R9	002150	002150	002150	002150	002150
110105	110105	1101R9	002938	002938	002938	002938	002938
122174	122174	1101R9	030729	030729	030729	030729	030729
		180726	110105	110105	110105	110105	110105

Revised 2-2-2024


Part #	Description	Qty	Part #	Description	Qty
0002.H8	PUMP CRANCKSHAFT	1	1412.19	BONDED SEAL G1/2"	10
0007.82	D40 VITON SHAFT SEAL	3	1412.20	BONDED SEAL G3/4"	1
0014.75	PLUNGER GUIDE	3	1412.25	BONDED SEAL G1"	1
0021.49	HIGH PRESSURE SEAL RING D36 ^B	6	1412.29	BONDED SEAL G1/4"	3
0021.50	LOW PRESSURE SEAL RING D36 ^B	3	1412.30	BONDED SEAL G2"	1
0023.C6	UPPER RING D36 ^C	3	1502.21	PIN	3
0029.25	ANTI EXTRUSION RING ^A	6	1506.35	SNAP RING D28 UNI7437	6
0029.26	ANTI EXTRUSION RING	6	1506.36	SNAP RING D55 UNI7437 INOX	1
0029.38	ANTI EXTRUSION RING ^B	3	1506.40	SNAP RING D72 UNI7437	3
0105.03	BUSHING	3	1534.16	SHIM 0,1mm	1
0208.26	OIL LEVEL SIGHT GLASS	1	1534.17	SHIM 0,2mm	1
0208.C5	REAR COVER	1	1603.E4	INOX PLUG G1/2"	10
0208.C6	VALVE COVER	1	1603.E6	INOX PLUG G3/4"	1
0208.C7	VALVE COVER	1	1603.H2	INOX PLUG G1"	1
0208.C8	INFERIOR COVER	1	1603.L6	INOX PLUG G2"	1
0209.D9	CRANCKCASE	1	1603.L7	INOX PLUG G1/4"	3
0248.13	BEARING	2	1603.M3	OIL LEVEL SIGHT GLASS G3/4"	1
0301.78	SEPARATING DISC	3	1604.N8	PUMP HEAD "HX-HP"	1
0307.29	RING D36 ^B	3	1625.16	OIL VENT PLUG G3/4"	1
0501.N9	CLOSED BEARING FLANGE	1	1804.26	HEX SCREW M6X20 UNI 5739 ZINC PLATED	2
0801.29	KEY A22X14X70 UNI6604-A	1	1805.01	SOCKET HEAD SCREW M10X25 UNI5931 ZINC PLATED	8
1101.H6	OR D47,29X2,62 RIF 3187	1	1805.06	SOCKET HEAD SCREW M8X20 UNI5931 ZINC PLATED	12
1101.J3	OR D10,78X2,62 RIF 3043 90SHORE ^D	3	1805.81	SOCKET HEAD SCREW M18X180 UNI5931 12.9 GEOMET	8
1101.P6	OR D57,15X3,53 RIF 161	6	1805.82	SOCKET HEAD SCREW M18X60 UNI5931 12.9 GEOMET	16
1101.Q5	OR D75,79X3,53 RIF 4300 ^{B,C}	3	1805.86	HEX SCREW M10X65	6
1101.R4	OR D275,00x4,00 RIF 2750-40	1	1807.26	HEX SCREW M12X130 DIN6921 INOX ^D	3
1101.R8	OR D158,3x3,53 RIF 4625	2	6000.C4	PISTON ROD SUBASSEMBLY	3
1101.R9	OR D44,04X3,53 RIF 4175 90SHORE ^A	6	6006.B9	VALVE SUBASSEMBLY ^A	3
1205.78	PISTON D36	3	6006.C1	VALVE SUBASSEMBLY ^A	3
1221.74	PRESSURE RING D36 ^C	3	^A 6072.03	KIT 257	
1242.P4	M12 UNI-ISO3266 ZINC PLATED EYEBOLT	2	^B 6700.10	KIT 310	
1403.59	WASHER ^D	3	^C 6600.11	KIT 311	
			^D 6072.06	KIT 260	

RH118 MI GEAR REDUCER

2.238:1 PTO GEAR REDUCTION

for HXR1-D ___ / ___ R MI PUMPS

REQUIRES 101 OZ. 85W-90 GEAR LUBE

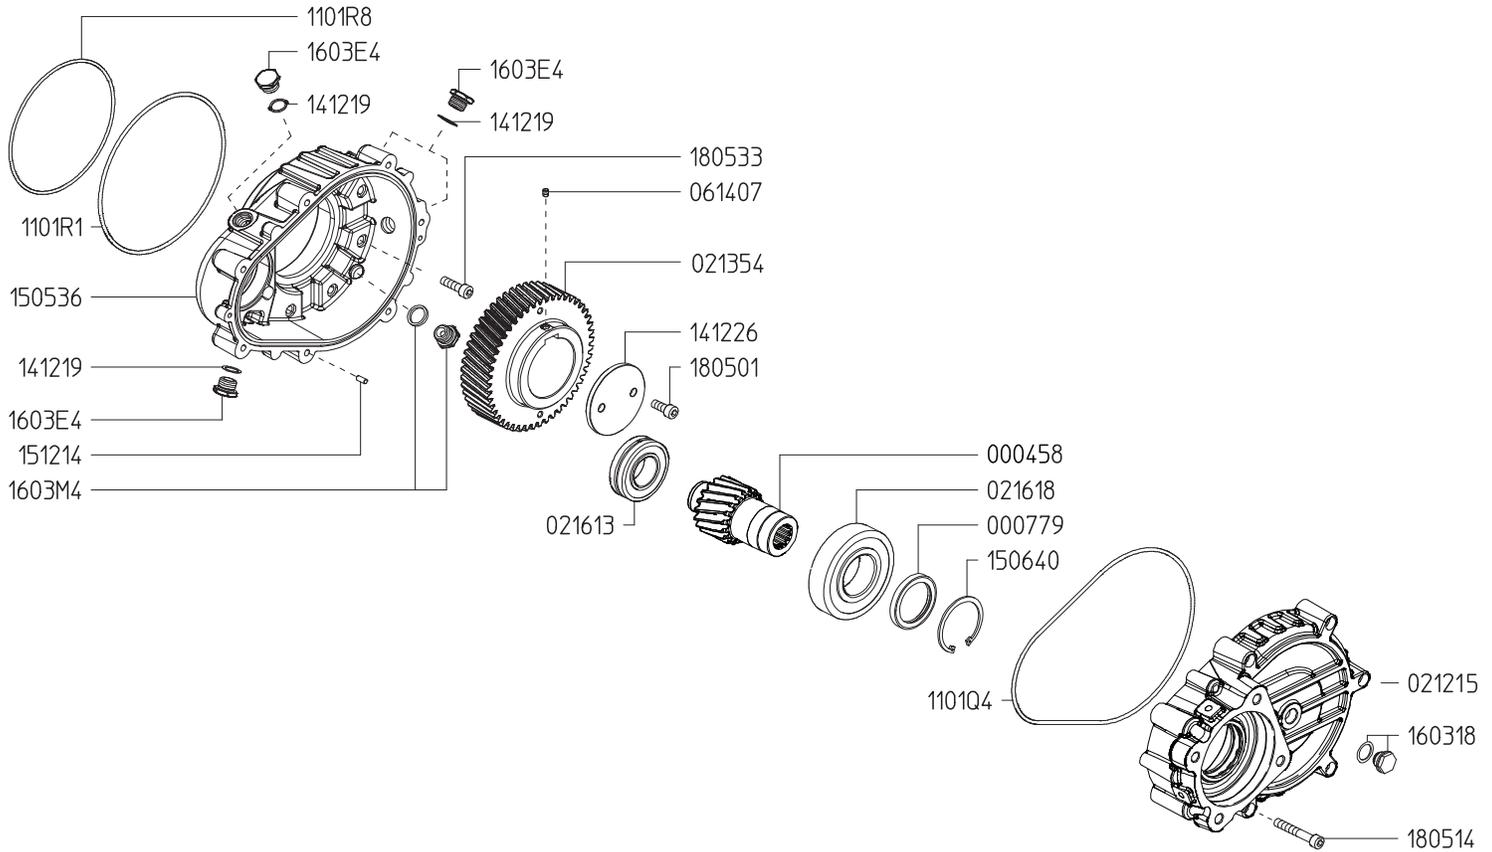

Revised 2-2-2024

Part #	Description	Qty	Part #	Description	Qty
0004.58	PINION "RH 118 MI"	1	1412.19	BONDED SEAL G1/2"	4
0007.79	SHAFT SEAL D55 VITON	1	1505.36	GEARBOX CASE	1
0212.15	GEARBOX COVER - MI	1	1506.40	SNAP RING D72 UNI7437 ZINC PLATED	1
0213.54	GEAR "RH 118"	1	1512.14	CYLINDRICAL PIN D6,0X14 UNI-EN 28734	2
0216.13	BEARING	1	1603.18	OIL LEVEL SIGHT GLASS PLUG G1/2"	1
0216.18	BEARING	1	1603.E4	INOX PLUG G1/2"	4
0614.07	SOCKET SET SCREW M8X10 UNI5929	1	1603.M4	MAGNETIC PLUG G1/2"	1
1101.R1	OR D209,15X3,53 RIF 4825	1	1805.01	SOCKET HEAD SCREW M10X25 UNI5931 ZINC PLATED	2
1101.Q4	OR D266,30X3,53 RIF 41050	1	1805.33	SOCKET HEAD SCREW M10X35 UNI5931 ZINC PLATED	8
1101.R8	OR D158.3x3.53 RIF 4625	1	1805.14	SOCKET HEAD SCREW M10X60 UNI5931 ZINC PLATED	7
1412.26	WASHER	1			

