ZETA 100

Scan this QR Code for more information

GREENTECH Diaphragms Standard. Buna-N Optional.

ZETA 100 low pressure 3-cylinder diaphragm pumps have anodized aluminum bodies with plasticized aluminum heads, stainless steel valves and glass-filled nylon manifolds. A pulsation dampener standard on all models.

ZETA 100 pumps are excellent for various horticultural and agricultural spraying applications.





ZETA 100 1C



ZETA 100 VA



ZETA 100 TS1C



ZETA 100 MI1


Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
ZETA 100 1C	26.0	98	300	20	550	1-3/8" 6-Spline Male PTO Shaft	30 LBS
ZETA 100 VA	26.0	98	300	20	550	Universal VA Drive Face.	30 LBS
ZETA 100 TS1C	26.0	98	300	20	550	1-3/8" 6-Spline Male PTO x 25mm Solid Keyed Thru-Shaft	30 LBS
ZETA 100 MI1	26.0	98	300	20	550	2-Bolt, A-Flange, 1" Hollow Shaft for Hydraulic Motor	30 LBS

Specifications	ZETA 100
Inlet Port	1-1/2" Hose Barb
Outlet Port	3/4" Hose Barb
Piston Diameter	65.0mm
Crankshaft Stroke/Code	18.0mm / A
Dimensions	13"L x 11"W x 12"H

Lubrication: Requires 39 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

QUICK REFERENCE SERVICE PARTS

Description	Part #
Diaphragm Kit - GREENTECH	8700.10
Diaphragm Bolt & Washer Kit	6062.48
Valve Kit	6062.D8
Complete Repair Kit	8700.61CK

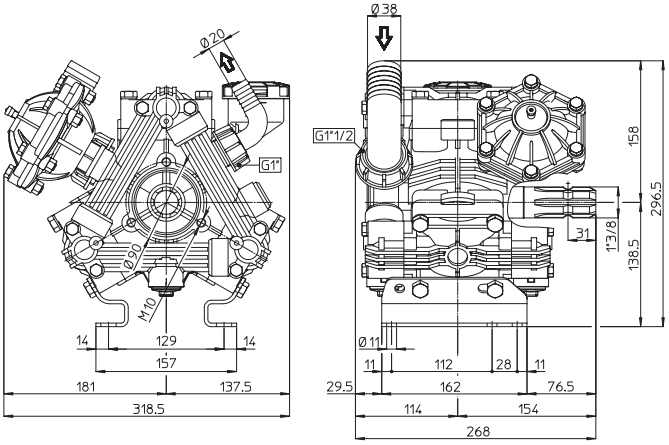

Dimensional Drawings are Shown in Millimeters. To Convert to Inches, Multiply Dimension x 0.03937

Recommended Accessories and Drive Options



6005.31/LP
Control Unit Regulator



6005.31/LP-N
Control Unit Regulator - NPT



6066.05
PTO Drive Safety Shield



UD1-1/2-16
1-1/2" HI-Flow Filter 16 Mesh Screen



15.5823
Udor Lube Premium Pump Oil