ZETA 40 / ZETA 85

Scan this QR Code for more information

GREENTECH Diaphragms Standard. Buna-N Optional.

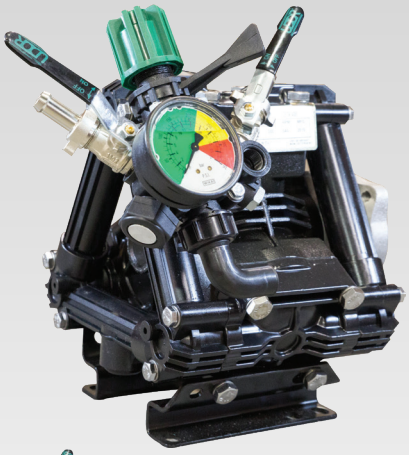

ZETA 40 & ZETA 85 low pressure 3-cylinder diaphragm pumps have anodized aluminum bodies with plasticized aluminum heads, stainless steel valves and glass-filled nylon manifolds. A control valve with pressure gauge is standard on all models.

ZETA 40 & ZETA 85 pumps are excellent for various horticultural and agricultural spraying applications.



ZETA 40



ZETA 40 VAGR3/4



ZETA 85 VA



ZETA 85 VAGR3/4

Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
ZETA 40 VA	10.5	44	300	20	550	Universal VA Drive Face.	29 LBS
ZETA 40 VAGR3/4	10.5	44	300	20	550	Gear Reduction for 3/4" Shaft Gas Engine, 4-6.5 HP	36 LBS
ZETA 85 VA	22.0	85	300	20	550	Universal VA Drive Face.	29 LBS
ZETA 85 VAGR3/4	22.0	85	300	20	550	Gear Reduction for 3/4" Shaft Gas Engine, 4-6.5 HP	36 LBS

Specifications	ZETA 40	ZETA 85
Inlet Port	1-1/4" Hose Barb	1-1/2" Hose Barb
Outlet Ports - Valve	(2) 1/2" Hose Barb	(2) 1/2" Hose Barb
Bypass	3/4" Hose Barb	3/4" Hose Barb
Piston Diameter	55.0mm	60.0mm
Crankshaft Stroke/Code	11.0mm / J	18.0mm / A
Dims. - Pump Only		11"L x 11"W x 12"H
- GR Version		16"L x 11"W x 12"H

Lubrication: Requires 39 oz. of Udor Lube 40W Premium Pump Oil. Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

QUICK REFERENCE SERVICE PARTS

Description	Part #
Diaphragm Kit - GREENTECH	6062.97
Diaphragm Bolt & Washer Kit	6062.48
Valve Kit	6062.D8
Regulator Repair Kit	6062.A9
Complete Repair Kit	8700.60CK

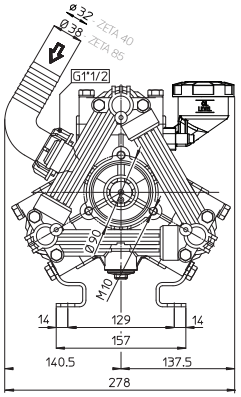





Dimensional Drawings are Shown in Millimeters. To Convert to Inches, Multiply Dimension x 0.03937

Recommended Accessories and Drive Options



6010.95
Control Unit
Regulator w/Gauge



5027.75
Gear Reduction
3/4" Shaft Gas Engines



7751.A3
1" Solid Keyed
Shaft and Bolts



UD1-1/4-16
1-1/4" HI-Flow Filter
16 Mesh Screen



UD1-1/2-16
1-1/2" HI-Flow Filter
16 Mesh Screen



15.5823
Udor Lube
Premium Pump Oil