
NK 500 Series

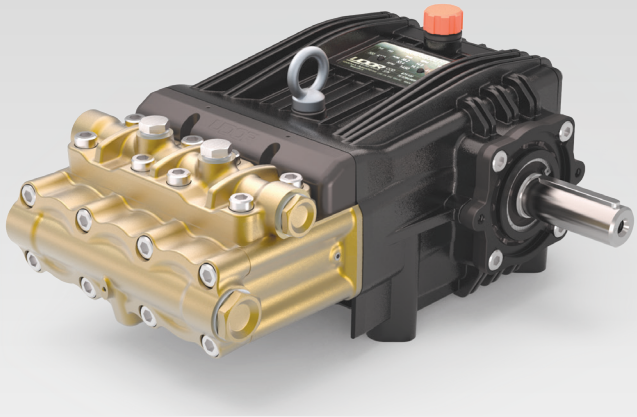

- Brass Manifold
- Solid Ceramic Plungers
- Stainless Steel Plunger Guides and Check Valves
- Bronze Connecting Rods
- Heavy Duty Flat Base High Pressure Seals
- 57.6 oz. Capacity Vented Oil Bath Crank Case
- Max Fluid Temp, 160°F

Scan this QR Code for more information

NK 500 Series Models

30mm Keyed Solid Shaft

	Model	Flow GPM	Flow l/min	Pressure PSI	Pressure bar	Plunger Dia.	Crankshaft Stroke	Crankshaft Code	Power	Seal Kit	Valve Kit	Wt.
1450 RPM	NKC 26/500 R	7.0	26.4	7250	500	25mm	27.0mm	B	33.9 EBHP	6061.G2	6930.02	67 lbs
	NKC 30/500 R	8.3	31.4	7250	500	25mm	30.0mm	F	40.3 EBHP	6061.G2	6930.02	67 lbs
1750 RPM	NKD 7.0/75 R	7.0	26.3	7250	500	25mm	22.0mm	3	33.8 EBHP	6061.G2	6930.02	67 lbs
	NKD 8.0/75 R	8.4	32.0	7250	500	25mm	27.0mm	B	41.0 EBHP	6061.G2	6930.02	67 lbs
Rail Kit	8702.36						Tall (2-1/2") Heavy Duty Rail Kit for NK Series Solid Shaft Pumps					

NOTE: All pump models available with left-hand drive option. Substitute 'L' for "R' in model number when ordering (ex. NKC 26/500 L)

NK 500 Series Dimensional Drawings

