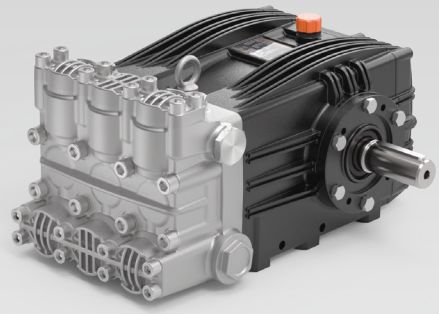


- Anodized Aluminum Crank Case
- Nickel-Plated Manifold
- Stainless Steel Check Valves
- Heavy Duty Bronze Connecting Rods
- Heavy Duty Roller Bearings
- 1-1/2" BSP-F Inlet. 1" BSP-F Outlet
- 128 oz. Oil Capacity
- Max Fluid Temp, 160°F


Scan this QR Code for more information

VXX Series Plunger Pumps

40 mm Solid Keyed Shaft

	Model	Flow GPM	Flow l/min	Pressure PSI	Pressure bar	Plunger Dia.	Crankshaft Stroke	Crankshaft Code	Power	Seal Kit	Valve Kit	Wt.
1000 RPM	VXX-B 75/350 R	19.8	75.0	5075	350	28mm	42.0mm	8	63.3 EBHP	6061.N2	6061.N3	141 lbs
	VXX-B 130/220 R	34.4	130.0	3190	220	36mm	42.0mm	8	73.3 EBHP	6061.F1	6061.E9	137 lbs
	VXX-B 160/180 R	42.3	160.0	2610	180	40mm	42.0mm	8	73.8 EBHP	6061.F3	6061.E9	137 lbs
	VXX-B 200/150 R	52.8	200.0	2175	150	45mm	42.0mm	8	76.9 EBHP	6061.F8	6061.E9	137 lbs
1250 RPM	VXX-F 240/140 R	63.2	239.0	2030	140	45mm	42.0mm	8	85.8 EBHP	6061.F8	6061.E9	137 lbs

NOTE: All pump models available with left-hand drive option. Substitute 'L' for "R' in model number when ordering (ex. VXX-B 200/150 L)

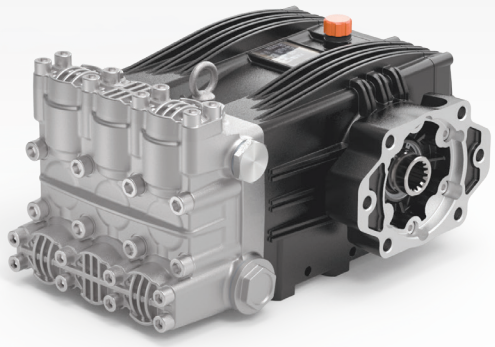

- Anodized Aluminum Crank Case
- Nickel-Plated Manifold
- Stainless Steel Check Valves
- Heavy Duty Bronze Connecting Rods
- Heavy Duty Roller Bearings
- 1-1/2" BSP-F Inlet. 1" BSP-F Outlet
- 128 oz. Oil Capacity
- Max Fluid Temp, 160°F

Scan this QR Code for more information

VXX Series Hydraulic Drive Models

14T, 12/24 DP Splined Hollow Shaft. SAE J744B Flange

	Model	Flow GPM	Flow l/min	Pressure PSI	Pressure bar	Plunger Dia.	Crankshaft Stroke	Crankshaft Code	Power	Seal Kit	Valve Kit	Wt.
1000 RPM	VXX-B 75/350 R MI	19.8	75.0	5075	350	28mm	42.0mm	8	63.3 EBHP	6061.N2	6061.N3	141 lbs
	VXX-B 130/220 R MI	34.4	130.0	3190	220	36mm	42.0mm	8	73.3 EBHP	6061.F1	6061.E9	137 lbs
	VXX-B 160/180 R MI	42.3	160.0	2610	180	40mm	42.0mm	8	73.8 EBHP	6061.F3	6061.E9	137 lbs
	VXX-B 200/150 R MI	52.8	200.0	2175	150	45mm	42.0mm	8	76.9 EBHP	6061.F8	6061.E9	137 lbs
1200 RPM	VXX-F 240/140 R MI	63.2	239.0	2030	140	45mm	42.0mm	8	85.8 EBHP	6061.F8	6061.E9	137 lbs

NOTE: All pump models available with left-hand drive option. Substitute 'L' for "R' in model number when ordering (ex. VXX-B 200/150 L MI)

Dimensional Drawings

